



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: May-2018

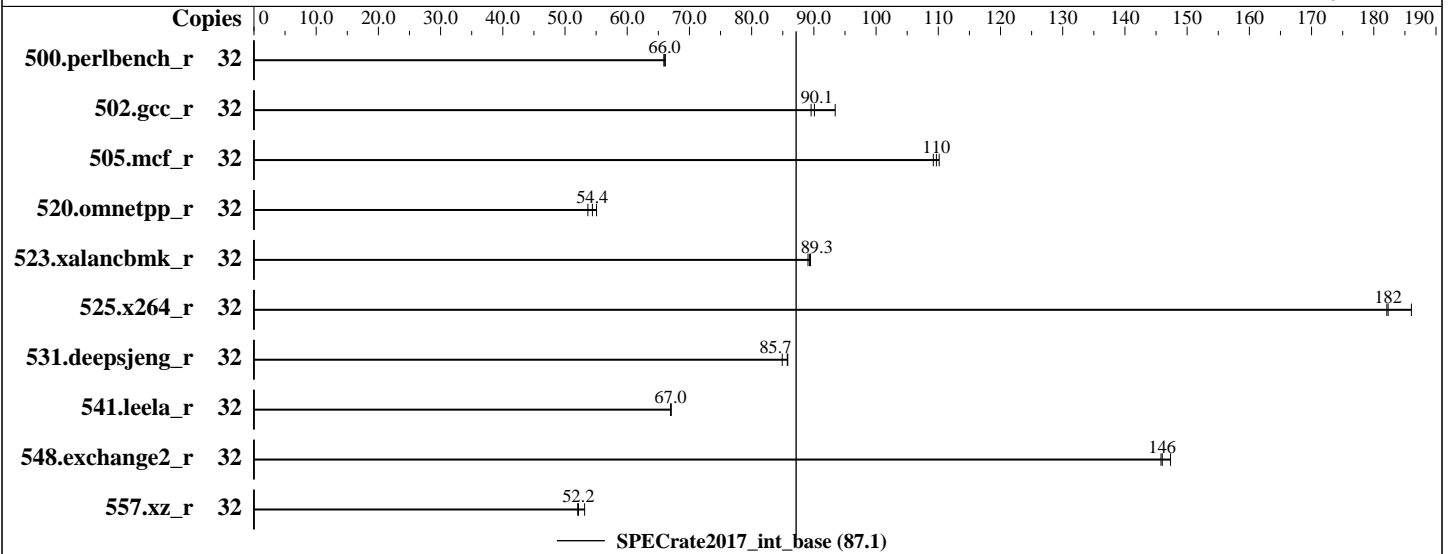

## Hardware

CPU Name: AMD EPYC 7401P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 900 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.131-94.25-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: HPE BIOS Version A41 04/06/2018 released Jul-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc general purpose malloc implementation v4.5.0;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	773	65.9	770	66.1	<b><u>772</u></b>	<b><u>66.0</u></b>							
502.gcc_r	32	506	89.6	<b>503</b>	<b><u>90.1</u></b>	485	93.4							
505.mcf_r	32	470	110	474	109	<b><u>471</u></b>	<b><u>110</u></b>							
520.omnetpp_r	32	782	53.7	762	55.1	<b><u>772</u></b>	<b><u>54.4</u></b>							
523.xalancbmk_r	32	379	89.1	<b>378</b>	<b><u>89.3</u></b>	378	89.5							
525.x264_r	32	301	186	<b>307</b>	<b><u>182</u></b>	308	182							
531.deepsjeng_r	32	<b>428</b>	<b><u>85.7</u></b>	427	85.8	432	84.9							
541.leela_r	32	790	67.1	<b>791</b>	<b><u>67.0</u></b>	791	67.0							
548.exchange2_r	32	575	146	<b>574</b>	<b><u>146</u></b>	569	147							
557.xz_r	32	664	52.0	<b>663</b>	<b><u>52.2</u></b>	650	53.2							

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu  
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"  
dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).  
Transparent huge pages were enabled for this run (OS default)  
Huge pages were not configured for this run.  
IRQ balance service stopped using "systemctl stop irqbalance.service"  
Tuned profile set with "tuned-adm profile throughput-performance"  
Speculative Store Bypass (CVE-2018-3639) mitigation was disabled system-wide via kernel boot parameter "spec\_store\_bypass\_disable=off"  
Benchmark was conducted on a pre-release kernel (Kernel 4.4.131-94.25-default) which has the same performance as the release version (Kernel 4.4.131-94.29-default)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen10**

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOCONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> = 2MiB.

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
Performance Determinism set to Power Deterministic  
Processor Power and Utilization Monitoring set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C6 State  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on dl325-gen10 Thu Jun 7 23:51:00 2018

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen10**

**(2.00 GHz, AMD EPYC 7401P)**

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## Platform Notes (Continued)

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7401P 24-Core Processor

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 1

NUMA node(s): 4

Vendor ID: AuthenticAMD

CPU family: 23

Model: 1

Model name: AMD EPYC 7401P 24-Core Processor

Stepping: 2

CPU MHz: 2000.000

CPU max MHz: 2000.0000

CPU min MHz: 1200.0000

BogoMIPS: 3992.40

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 64K

L2 cache: 512K

L3 cache: 8192K

NUMA node0 CPU(s): 0-5,24-29

NUMA node1 CPU(s): 6-11,30-35

NUMA node2 CPU(s): 12-17,36-41

NUMA node3 CPU(s): 18-23,42-47

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc extd\_apicid amd\_dcm aperfmperf eagerfpu pni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx arat

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: May-2018

## Platform Notes (Continued)

hw\_pstate rds retpoline retpoline\_amd npt lbrv svm\_lock nrip\_save tsc\_scale  
vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase  
bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 clzero  
irperf ibpb overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 128769 MB
node 0 free: 128574 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 129021 MB
node 1 free: 128840 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 129021 MB
node 2 free: 128838 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 128867 MB
node 3 free: 128682 MB
node distances:
node  0  1  2  3
 0:  10  16  16  16
 1:  16  10  16  16
 2:  16  16  10  16
 3:  16  16  16  10
```

```
From /proc/meminfo
MemTotal:      528057076 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: May-2018

## Platform Notes (Continued)

```

VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux dl325-gen10 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 1 14:58

SPEC is set to: /home/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G  6.0G  846G   1% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 04/06/2018

Memory:

```

8x UNKNOWN NOT AVAILABLE
8x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
=====

```

```

AOCCLLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCCLLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====

```

```

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

```

```

AOCCLLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## Compiler Version Notes (Continued)

```

AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

```

```

=====
FC 548.exchange2_r(base)
-----

```

```

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

SPECrate2017\_int\_base = 87.1

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -mavx -madox -funroll-loops -ffast-math  
-z muldefs -Ofast -fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-08 01:50:59-0400.

Report generated on 2019-02-21 17:36:19 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-27.