



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

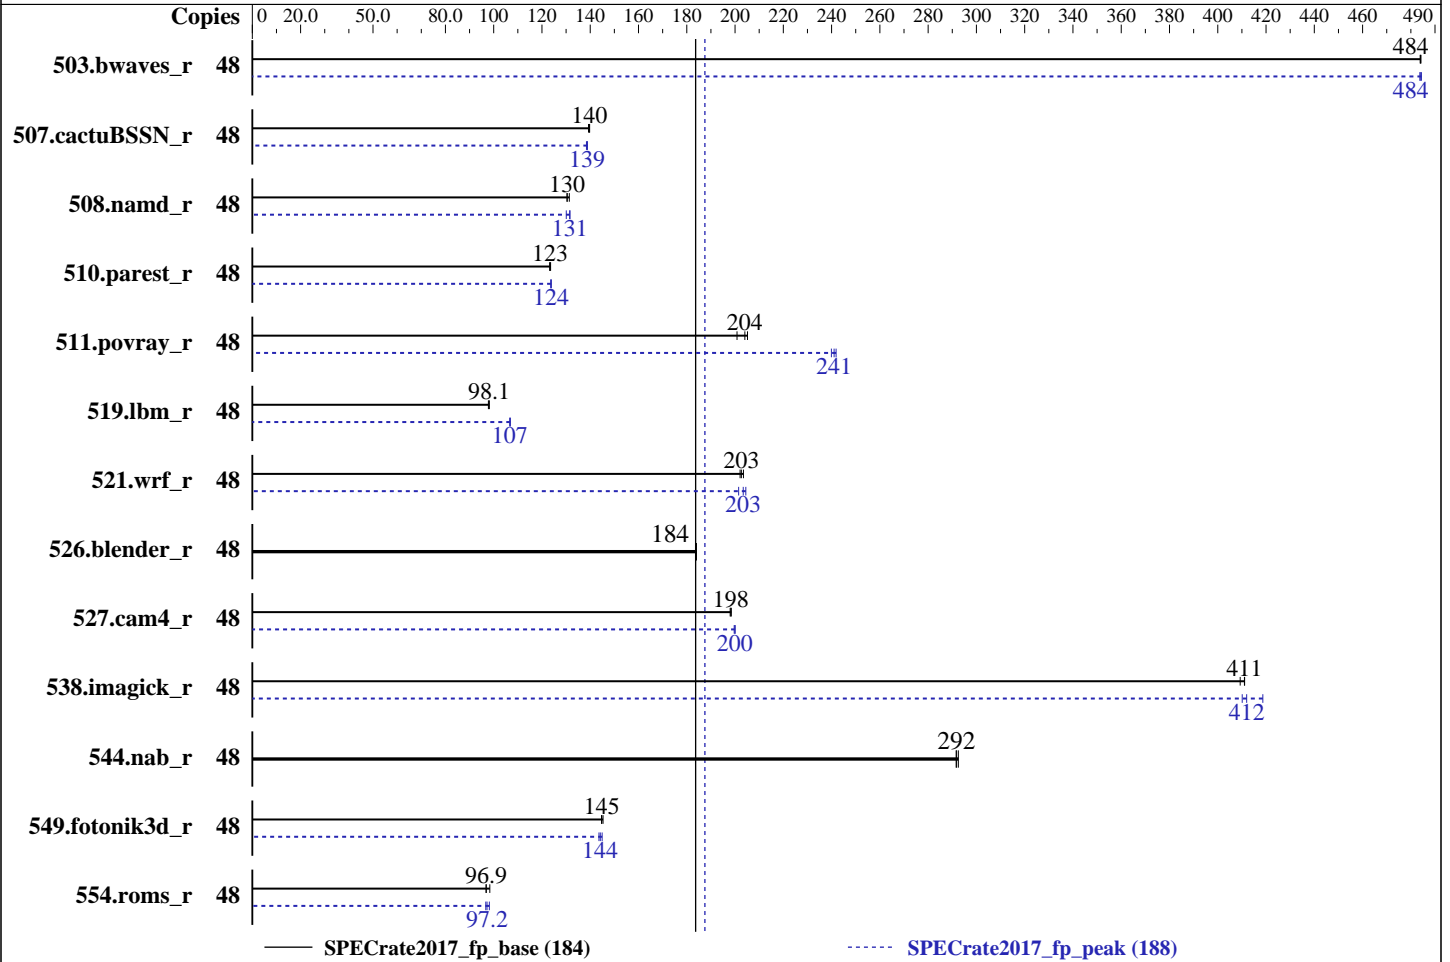

Hardware

CPU Name: Intel Xeon Gold 6136
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.120-94.17-default
 Compiler: C/C++: Version 18.0.3.222 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.3.222 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 0905 released Mar-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	995	484	995	484	994	484	48	995	484	994	484	995	484
507.cactuBSSN_r	48	435	140	436	139	435	140	48	439	138	438	139	438	139
508.namd_r	48	347	131	350	130	350	130	48	347	131	351	130	346	132
510.parest_r	48	1016	124	1018	123	1019	123	48	1015	124	1015	124	1014	124
511.povray_r	48	546	205	549	204	558	201	48	463	242	465	241	467	240
519.lbm_r	48	517	97.8	516	98.1	516	98.1	48	474	107	473	107	474	107
521.wrf_r	48	531	203	528	203	532	202	48	534	201	529	203	526	204
526.blender_r	48	398	184	397	184	398	184	48	398	184	397	184	398	184
527.cam4_r	48	423	198	424	198	423	198	48	420	200	420	200	420	200
538.imagick_r	48	292	409	290	411	290	411	48	290	412	291	410	285	419
544.nab_r	48	276	293	277	292	277	292	48	276	293	277	292	277	292
549.fotonik3d_r	48	1292	145	1293	145	1287	145	48	1291	145	1297	144	1302	144
554.roms_r	48	787	96.9	775	98.4	788	96.8	48	789	96.7	784	97.2	777	98.2

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

SNC = Enabled

IMC interleaving = 1 way

Patrol Scrub = Disabled

VT-d = Disabled

ENERGY_PERF_BIAS_CFG mode = Performance

HyperThreading = Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Sat Jul 21 08:21:32 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26

physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping: 4
CPU MHz: 3001.000
CPU max MHz: 3001.0000
CPU min MHz: 1200.0000
BogoMIPS: 6180.23
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,7,10,24-26,29,31,34
NUMA node1 CPU(s): 3,4,6,8,9,11,27,28,30,32,33,35
NUMA node2 CPU(s): 12-14,17,19,22,36-38,41,43,46
NUMA node3 CPU(s): 15,16,18,20,21,23,39,40,42,44,45,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 7 10 24 25 26 29 31 34
node 0 size: 95306 MB
node 0 free: 94777 MB
node 1 cpus: 3 4 6 8 9 11 27 28 30 32 33 35
node 1 size: 96759 MB
node 1 free: 96307 MB
node 2 cpus: 12 13 14 17 19 22 36 37 38 41 43 46
node 2 size: 96759 MB
node 2 free: 96274 MB
node 3 cpus: 15 16 18 20 21 23 39 40 42 44 45 47
node 3 size: 96756 MB
node 3 free: 96001 MB
node distances:
node 0 1 2 3
0: 10 11 21 21

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Platform Notes (Continued)

```

1:  11  10  21  21
2:  21  21  10  11
3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394835376 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

```

From /etc/*release* /etc/*version*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

```

run-level 3 Jul 20 17:06

SPEC is set to: /spec2017

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    203G   93G  109G  47% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0905 03/19/2018
Memory:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Platform Notes (Continued)

12x Kingston D4-26662R4-32G 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)

icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak)

icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base, peak)

icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 507.cactuBSSN_r(base)
```

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 507.cactuBSSN_r(peak)
```

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 554.roms_r(peak)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nonstandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_fp_base = 184

SPECrate2017_fp_peak = 188

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-07-20 20:21:31-0400.

Report generated on 2019-03-08 20:41:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-21.