



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

**Huawei 9008 V5 (Intel Xeon Platinum 8158)**

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: Mar-2018

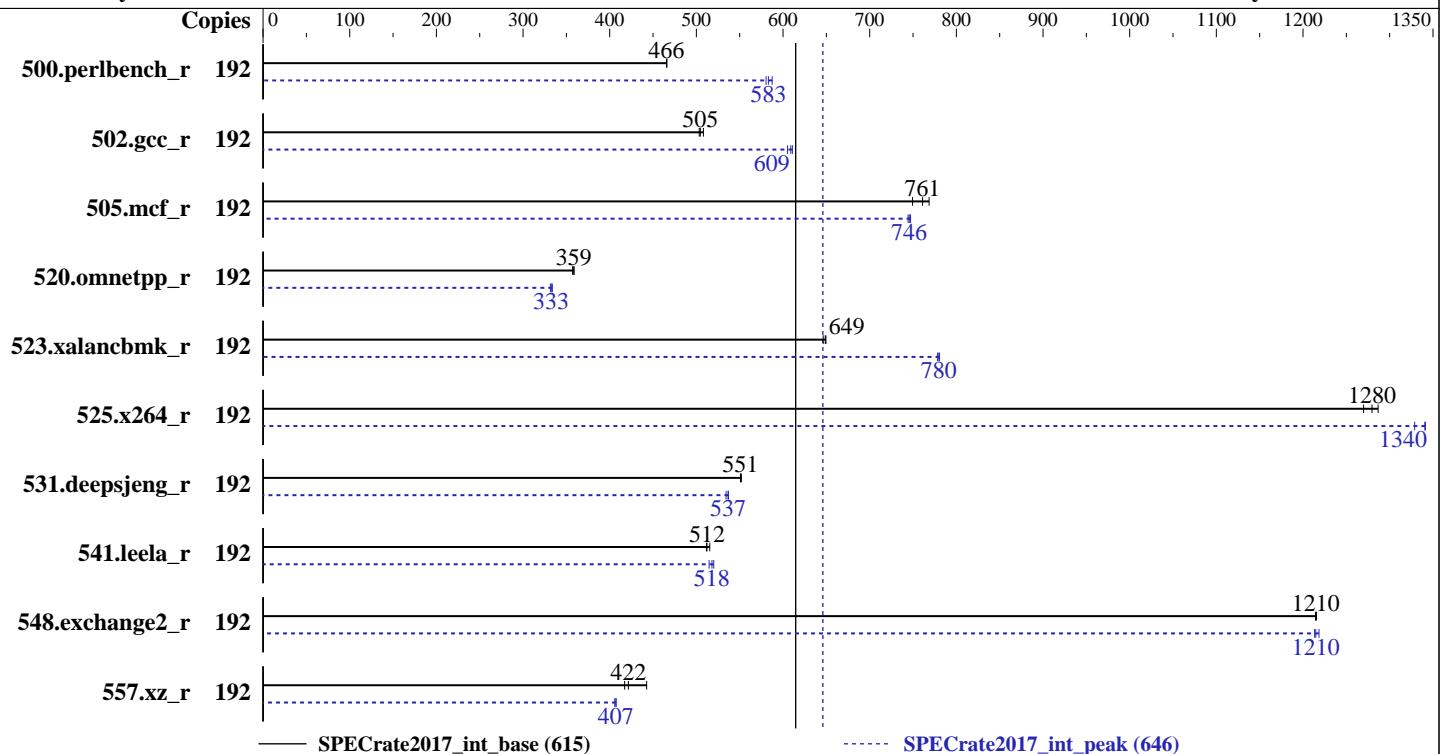

— SPECrate2017\_int\_base (615)

····· SPECrate2017\_int\_peak (646)

## Hardware

CPU Name: Intel Xeon Platinum 8158  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 96 cores, 8 chips, 2 threads/core  
 Orderable: 2,4,6,8 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 2 x 900 GB SAS HDD 10K RPM, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server for SAP Applications 12 SP2  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 8.92 released May-2018  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

**SPECrate2017\_int\_base = 615**

Huawei 9008 V5 (Intel Xeon Platinum 8158)

**SPECrate2017\_int\_peak = 646**

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	656	466	<b>656</b>	<b>466</b>	656	466	192	520	587	527	580	<b>524</b>	<b>583</b>		
502.gcc_r	192	<b>539</b>	<b>505</b>	540	503	535	508	192	445	611	<b>446</b>	<b>609</b>	449	605		
505.mcf_r	192	404	769	<b>408</b>	<b>761</b>	414	749	192	417	744	415	747	<b>416</b>	<b>746</b>		
520.omnetpp_r	192	705	357	702	359	<b>703</b>	<b>359</b>	192	755	334	<b>757</b>	<b>333</b>	760	332		
523.xalancbmk_r	192	<b>313</b>	<b>649</b>	314	646	312	650	192	<b>260</b>	<b>780</b>	260	781	261	778		
525.x264_r	192	<b>263</b>	<b>1280</b>	261	1290	265	1270	192	251	1340	253	1330	<b>251</b>	<b>1340</b>		
531.deepsjeng_r	192	<b>399</b>	<b>551</b>	399	552	399	551	192	412	534	410	537	<b>410</b>	<b>537</b>		
541.leela_r	192	621	512	<b>621</b>	<b>512</b>	617	515	192	618	515	611	520	<b>614</b>	<b>518</b>		
548.exchange2_r	192	414	1210	<b>414</b>	<b>1210</b>	414	1220	192	415	1210	413	1220	<b>414</b>	<b>1210</b>		
557.xz_r	192	468	443	<b>492</b>	<b>422</b>	497	417	192	511	406	<b>509</b>	<b>407</b>	509	407		

**SPECrate2017\_int\_base = 615**

**SPECrate2017\_int\_peak = 646**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## General Notes (Continued)

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-0mnb Sat Jul 28 22:54:11 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz  
8 "physical id"s (chips)  
192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12  
siblings : 24  
physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 2: cores 0 1 2 3 4 8 9 11 17 18 19 20  
physical 3: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 4: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 5: cores 0 3 4 5 6 7 16 18 19 20 21 22  
physical 6: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 7: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECCrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECCrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

Byte Order: Little Endian  
CPU(s): 192  
On-line CPU(s) list: 0-191  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 8  
NUMA node(s): 16  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz  
Stepping: 4  
CPU MHz: 1200.000  
CPU max MHz: 3001.0000  
CPU min MHz: 1200.0000  
BogoMIPS: 5999.93  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K  
NUMA node0 CPU(s): 0-2,5,7,10,96-98,101,103,106  
NUMA node1 CPU(s): 3,4,6,8,9,11,99,100,102,104,105,107  
NUMA node2 CPU(s): 12-14,17,19,22,108-110,113,115,118  
NUMA node3 CPU(s): 15,16,18,20,21,23,111,112,114,116,117,119  
NUMA node4 CPU(s): 24-26,29,30,32,120-122,125,126,128  
NUMA node5 CPU(s): 27,28,31,33-35,123,124,127,129-131  
NUMA node6 CPU(s): 36-38,41,43,46,132-134,137,139,142  
NUMA node7 CPU(s): 39,40,42,44,45,47,135,136,138,140,141,143  
NUMA node8 CPU(s): 48-50,53,55,58,144-146,149,151,154  
NUMA node9 CPU(s): 51,52,54,56,57,59,147,148,150,152,153,155  
NUMA node10 CPU(s): 60-62,66-68,156-158,162-164  
NUMA node11 CPU(s): 63-65,69-71,159-161,165-167  
NUMA node12 CPU(s): 72-74,77,79,82,168-170,173,175,178  
NUMA node13 CPU(s): 75,76,78,80,81,83,171,172,174,176,177,179  
NUMA node14 CPU(s): 84-86,89,91,94,180-182,185,187,190  
NUMA node15 CPU(s): 87,88,90,92,93,95,183,184,186,188,189,191  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbe fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxtsw spec\_ctrl stibp retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq\_llc cqmq\_occup\_llc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 5 7 10 96 97 98 101 103 106
node 0 size: 95025 MB
node 0 free: 94692 MB
node 1 cpus: 3 4 6 8 9 11 99 100 102 104 105 107
node 1 size: 96762 MB
node 1 free: 96609 MB
node 2 cpus: 12 13 14 17 19 22 108 109 110 113 115 118
node 2 size: 96762 MB
node 2 free: 96421 MB
node 3 cpus: 15 16 18 20 21 23 111 112 114 116 117 119
node 3 size: 96762 MB
node 3 free: 96621 MB
node 4 cpus: 24 25 26 29 30 32 120 121 122 125 126 128
node 4 size: 96762 MB
node 4 free: 96617 MB
node 5 cpus: 27 28 31 33 34 35 123 124 127 129 130 131
node 5 size: 96762 MB
node 5 free: 96621 MB
node 6 cpus: 36 37 38 41 43 46 132 133 134 137 139 142
node 6 size: 96762 MB
node 6 free: 96489 MB
node 7 cpus: 39 40 42 44 45 47 135 136 138 140 141 143
node 7 size: 96762 MB
node 7 free: 96592 MB
node 8 cpus: 48 49 50 53 55 58 144 145 146 149 151 154
node 8 size: 96762 MB
node 8 free: 96564 MB
node 9 cpus: 51 52 54 56 57 59 147 148 150 152 153 155
node 9 size: 96762 MB
node 9 free: 96515 MB
node 10 cpus: 60 61 62 66 67 68 156 157 158 162 163 164
node 10 size: 96762 MB
node 10 free: 96581 MB
node 11 cpus: 63 64 65 69 70 71 159 160 161 165 166 167
node 11 size: 96762 MB
node 11 free: 96638 MB
node 12 cpus: 72 73 74 77 79 82 168 169 170 173 175 178
node 12 size: 96762 MB
node 12 free: 96644 MB
node 13 cpus: 75 76 78 80 81 83 171 172 174 176 177 179
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

```
node 13 size: 96762 MB
node 13 free: 96565 MB
node 14 cpus: 84 85 86 89 91 94 180 181 182 185 187 190
node 14 size: 96762 MB
node 14 free: 96642 MB
node 15 cpus: 87 88 90 92 93 95 183 184 186 188 189 191
node 15 size: 96605 MB
node 15 free: 96496 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9    10   11   12   13   14   15
  0: 10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  1: 20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  2: 20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
  3: 20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
  4: 20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
  5: 20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
  6: 20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
  7: 20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
  8: 20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
  9: 20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
 10: 20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
 11: 20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
 12: 20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
 13: 20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
 14: 20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
 15: 20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10
```

From /proc/meminfo

```
MemTotal:      1583410940 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECCrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECCrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-0mnb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)  
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Jul 28 22:51

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	btrfs	1.5T	23G	1.5T	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 8.92 05/02/2018

Memory:

```
48x NO DIMM NO DIMM  
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
525.x264_r(base, peak) 557.xz_r(base, peak)
```

```
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)
```

```
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_base = 615

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 548.exchange2\_r(base, peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 615

Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017\_int\_peak = 646

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 9008 V5 (Intel Xeon Platinum 8158)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_int\_base = 615

SPECrate2017\_int\_peak = 646

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/jet5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-28 10:54:10-0400.

Report generated on 2018-10-31 18:11:03 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.