



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032


Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

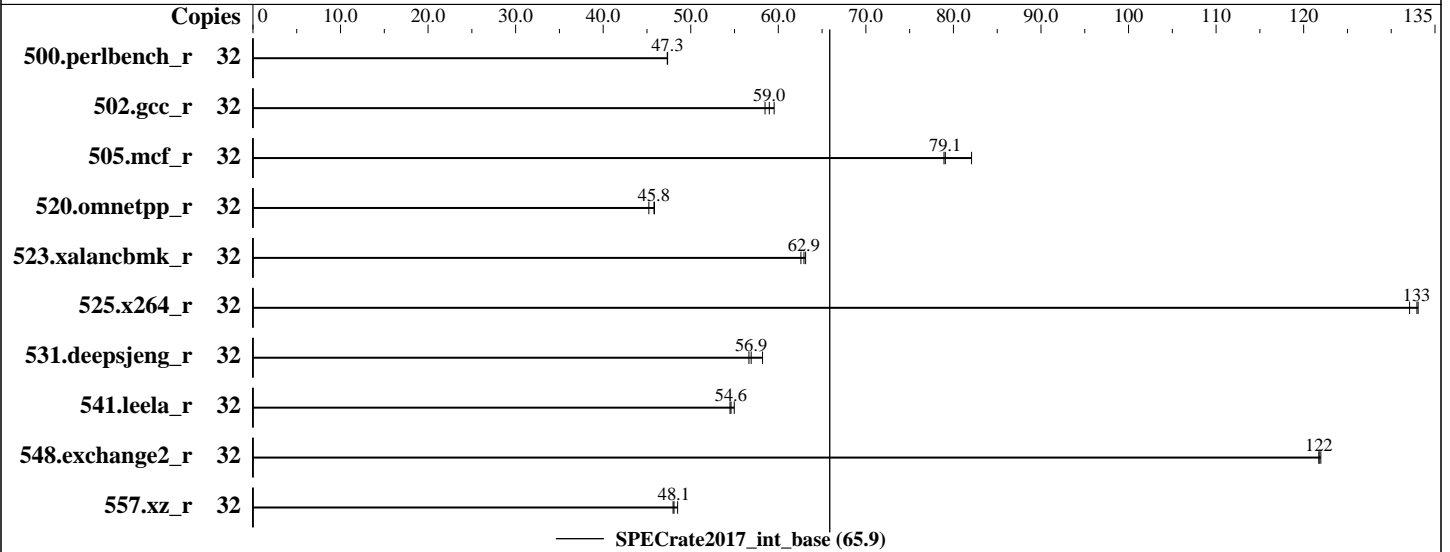

Hardware

CPU Name: Intel Xeon E5-2620 v4
 Max MHz.: 3000
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1-2 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 20 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 2133)
 Storage: 1x 240GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 3.10.0-862.9.1.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version R01.01.0027 released Jul-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	1076	47.4	<u>1076</u>	<u>47.3</u>	1077	47.3							
502.gcc_r	32	761	59.5	<u>768</u>	<u>59.0</u>	775	58.5							
505.mcf_r	32	630	82.1	<u>654</u>	<u>79.1</u>	655	78.9							
520.omnetpp_r	32	<u>917</u>	<u>45.8</u>	916	45.9	929	45.2							
523.xalancbmk_r	32	535	63.1	540	62.6	<u>537</u>	<u>62.9</u>							
525.x264_r	32	424	132	421	133	<u>421</u>	<u>133</u>							
531.deepsjeng_r	32	630	58.2	<u>645</u>	<u>56.9</u>	647	56.6							
541.leela_r	32	<u>971</u>	<u>54.6</u>	964	55.0	973	54.5							
548.exchange2_r	32	687	122	689	122	<u>689</u>	<u>122</u>							
557.xz_r	32	713	48.5	<u>719</u>	<u>48.1</u>	720	48.0							

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2017/lib/ia32:/usr/cpu2017/lib/intel64:/usr/cpu2017/je5.0.1-32:/usr/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5

sources available via jemalloc.net;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

Platform Notes

BIOS Configuration: Default
Sysinfo program /usr/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Fri Aug 17 13:59:44 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 79
Model name: Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
Stepping: 1
CPU MHz: 2942.486
CPU max MHz: 3000.0000
CPU min MHz: 1200.0000
BogoMIPS: 4190.31
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 20480K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.9

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Piotr Mankiewicz

Software Availability: Apr-2018

Platform Notes (Continued)

```

pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf
eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a rdseed adx smap xsaveopt cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts spec_ctrl
intel_stibp

```

```

/proc/cpuinfo cache data
cache size : 20480 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 65439 MB
node 0 free: 63320 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 65536 MB
node 1 free: 63809 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:      131740776 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

```

```
uname -a:
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

Platform Notes (Continued)

Linux localhost.localdomain 3.10.0-862.9.1.el7.x86_64 #1 SMP Wed Jun 27 04:30:39 EDT 2018 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline

run-level 3 Aug 17 13:59

SPEC is set to: /usr/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	50G	35G	16G	70%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C610.86B.01.01.0027.071020182329 07/10/2018

Memory:

16x NO DIMM NO DIMM
8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133, configured at 2134

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

Intel R1304WT2GSR (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECrate2017_int_base = 65.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-17 07:59:43-0400.

Report generated on 2018-10-31 18:31:52 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-11.