



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176


Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

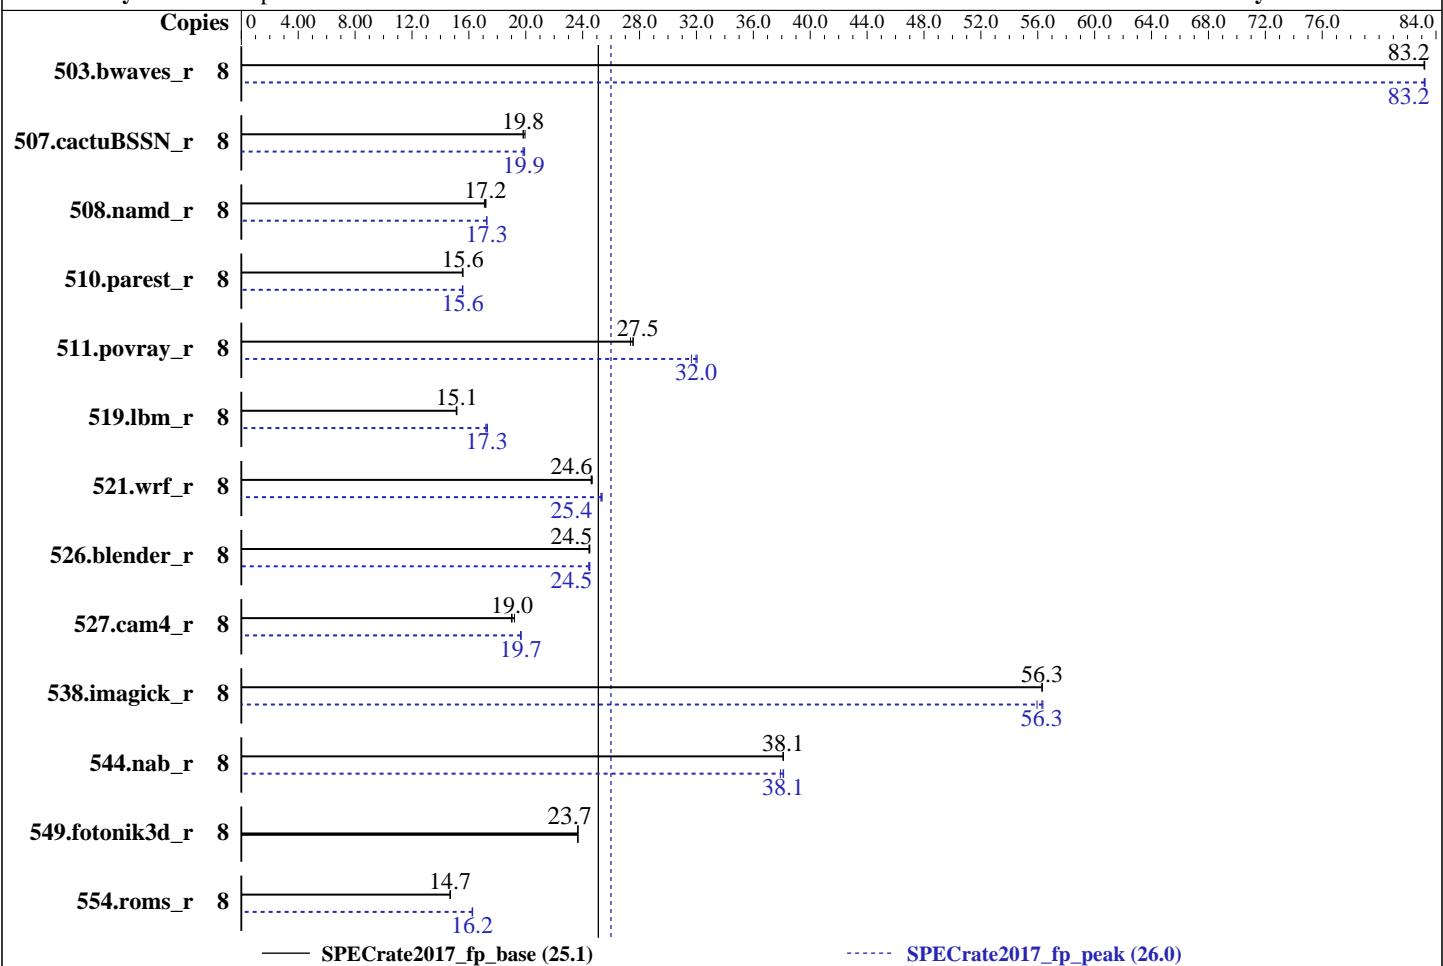

— SPECrate2017_fp_base (25.1)

····· SPECrate2017_fp_peak (26.0)

Hardware

CPU Name: Intel Xeon Silver 4112
 Max MHz.: 3000
 Nominal: 2600
 Enabled: 4 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
 Compiler: Kernel 4.4.114-94.11-default
 C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Supermicro BIOS version 2.1 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	964	83.2	965	83.2	964	83.2	8	964	83.2	964	83.2	965	83.2	965	83.2
507.cactusBSSN_r	8	511	19.8	511	19.8	508	20.0	8	508	19.9	510	19.9	511	19.8	511	19.8
508.namd_r	8	442	17.2	442	17.2	445	17.1	8	440	17.3	440	17.3	441	17.2	441	17.2
510.parest_r	8	1347	15.5	1344	15.6	1344	15.6	8	1344	15.6	1344	15.6	1346	15.5	1346	15.5
511.povray_r	8	678	27.6	678	27.5	683	27.4	8	584	32.0	583	32.1	590	31.6	590	31.6
519.lbm_r	8	557	15.1	557	15.1	558	15.1	8	488	17.3	487	17.3	491	17.2	491	17.2
521.wrf_r	8	726	24.7	728	24.6	728	24.6	8	709	25.3	707	25.4	707	25.4	707	25.4
526.blender_r	8	498	24.4	497	24.5	498	24.5	8	497	24.5	497	24.5	499	24.4	499	24.4
527.cam4_r	8	737	19.0	735	19.0	729	19.2	8	711	19.7	713	19.6	712	19.7	712	19.7
538.imagick_r	8	353	56.3	353	56.3	353	56.3	8	353	56.3	353	56.4	356	55.9	356	55.9
544.nab_r	8	353	38.1	353	38.1	354	38.1	8	355	37.9	353	38.1	353	38.1	353	38.1
549.fotonik3d_r	8	1317	23.7	1318	23.7	1318	23.7	8	1317	23.7	1318	23.7	1318	23.7	1318	23.7
554.roms_r	8	866	14.7	865	14.7	866	14.7	8	783	16.2	783	16.2	782	16.3	782	16.3

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

LLC prefetch = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Maximum Performance

Hardware P-state = Out of Band Mode

XPT Prefetch = Enable

Stale AtoS = Enable

LLC dead line alloc = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-cyyj Sun Oct 7 16:41:32 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 1 2 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 8

On-line CPU(s) list: 0-7

Thread(s) per core: 2

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

Platform Notes (Continued)

CPU family:	6
Model:	85
Model name:	Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
Stepping:	4
CPU MHz:	2600.003
BogoMIPS:	5200.00
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	8448K
NUMA node0 CPU(s):	0-7
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 192079 MB
node 0 free: 180536 MB
node distances:
node    0
 0: 10
```

```
From /proc/meminfo
MemTotal:       196689748 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP3"  
  VERSION_ID="12.3"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp3"  
  
uname -a:  
  Linux linux-cyyj 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)  
  x86_64 x86_64 x86_64 GNU/Linux  
  
Kernel self-reported vulnerability status:  
  
CVE-2017-5754 (Meltdown):           Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1):  Mitigation: Barriers  
CVE-2017-5715 (Spectre variant 2):  Mitigation: IBRS+IBPB  
  
run-level 3 Oct 7 06:51  
  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
  /dev/sda3        xfs   145G   47G   99G  32%  /home  
  
Additional information from dmidecode follows. WARNING: Use caution when you interpret  
this section. The 'dmidecode' program reads system data which is "intended to allow  
hardware to be accurately determined", but the intent may not be met, as there are  
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
  BIOS American Megatrends Inc. 2.1 06/14/2018  
  Memory:  
    2x NO DIMM NO DIMM  
    6x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400  
  
(End of data from sysinfo program)
```

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====

CC 519.lbm_r(peak)

=====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base, peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base, peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(base, peak)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.2 20180210

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fortran -m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

519.lbm_r (continued):

-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

549.fotonik3d_r: basepeak = yes

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4112)

SPECrate2017_fp_base = 25.1

SPECrate2017_fp_peak = 26.0

CPU2017 License: 001176

Test Date: Oct-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Mar-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-10-07 04:41:31-0400.

Report generated on 2018-10-31 19:09:30 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-30.