



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2018  
Hardware Availability: Dec-2018  
Software Availability: Feb-2018

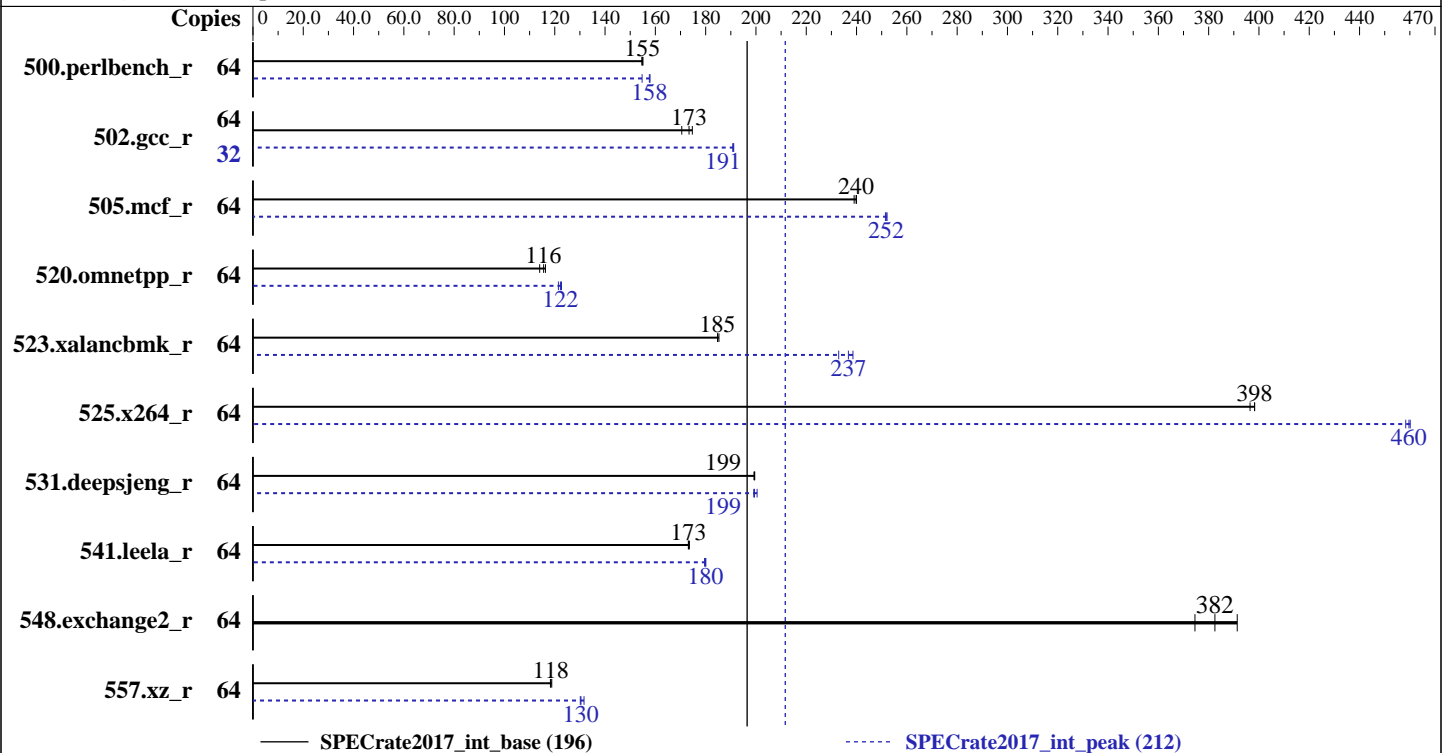

### Hardware

CPU Name: AMD EPYC 7371  
 Max MHz.: 3800  
 Nominal: 3100  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 500 GB SATAIII, 7200 RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Supermicro BIOS version 1.1c released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc general purpose malloc implementation V4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2018  
Hardware Availability: Dec-2018  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	657	155	<b>658</b>	<b>155</b>	659	155	64	<b>646</b>	<b>158</b>	658	155	645	158
502.gcc_r	64	532	170	519	175	<b>523</b>	<b>173</b>	32	237	191	237	191	<b>237</b>	<b>191</b>
505.mcf_r	64	431	240	433	239	<b>431</b>	<b>240</b>	64	411	251	410	252	<b>411</b>	<b>252</b>
520.omnetpp_r	64	<b>727</b>	<b>116</b>	722	116	737	114	64	<b>687</b>	<b>122</b>	684	123	691	121
523.xalancbmk_r	64	365	185	<b>366</b>	<b>185</b>	366	185	64	290	233	<b>285</b>	<b>237</b>	283	239
525.x264_r	64	283	396	281	398	<b>281</b>	<b>398</b>	64	<b>244</b>	<b>460</b>	244	460	244	458
531.deepsjeng_r	64	368	199	368	199	<b>368</b>	<b>199</b>	64	<b>368</b>	<b>199</b>	368	199	366	200
541.leela_r	64	611	174	612	173	<b>612</b>	<b>173</b>	64	590	180	589	180	<b>589</b>	<b>180</b>
548.exchange2_r	64	428	391	<b>438</b>	<b>382</b>	448	375	64	428	391	<b>438</b>	<b>382</b>	448	375
557.xz_r	64	582	119	584	118	<b>584</b>	<b>118</b>	64	525	132	<b>530</b>	<b>130</b>	531	130

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
  
Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Operating System Notes (Continued)

sync then drop\_caches=3 to reset caches before invoking runcpu  
  
dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).  
  
Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd1704-rate-libs-revD/64;/home/cpu2017/amd1704-rate-libs-revD/32:"  
MALLOC\_CONF = "lg\_chunk:26"  
  
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4 jemalloc, a general purpose malloc implementation, was obtained at <https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
    narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
    lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
Determinism Slider = Power  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-769d Fri Nov 23 18:25:22 2018  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>  
  
From /proc/cpuinfo  
    model name : AMD EPYC 7371 16-Core Processor  
        2 "physical id"s (chips)  
        64 "processors"  
    cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7371 16-Core Processor
Stepping:               2
CPU MHz:                3100.000
CPU max MHz:           3100.0000
CPU min MHz:           2500.0000
BogoMIPS:              6200.07
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-3,32-35
NUMA node1 CPU(s):     4-7,36-39
NUMA node2 CPU(s):     8-11,40-43
NUMA node3 CPU(s):     12-15,44-47
NUMA node4 CPU(s):     16-19,48-51
NUMA node5 CPU(s):     20-23,52-55
NUMA node6 CPU(s):     24-27,56-59
NUMA node7 CPU(s):     28-31,60-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

ibpb overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128849 MB
node 0 free: 128718 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129022 MB
node 1 free: 128895 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129022 MB
node 2 free: 128909 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129022 MB
node 3 free: 128904 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129022 MB
node 4 free: 128923 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129022 MB
node 5 free: 128928 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129022 MB
node 6 free: 128925 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 116925 MB
node 7 free: 116832 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 16 16 16 32 32 32 32
1:  16 10 16 16 32 32 32 32
2:  16 16 10 16 32 32 32 32
3:  16 16 16 10 32 32 32 32
4:  32 32 32 32 10 16 16 16
5:  32 32 32 32 16 10 16 16
6:  32 32 32 32 16 16 10 16
7:  32 32 32 32 16 16 16 10

```

From /proc/meminfo  
MemTotal: 1044386048 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
  Linux linux-769d 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Nov 23 17:20

SPEC is set to: /home/cpu2017
  Filesystem      Type      Size  Used Avail Use% Mounted on
  /dev/sda4       xfs       422G   28G  394G   7% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 1.1c 10/04/2018
  Memory:
    16x NO DIMM NO DIMM
    16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CXXC 523.xalanbmk\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 541.leela\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
FC 548.exchange2\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
clang gfortran

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madox -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop
-fplugin-arg-dragonegg-llvm-option=-enable-iv-split
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

502.gcc_r: -m32 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -ljemalloc

505.mcf_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

523.xalancbmk\_r: -m32 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100  
-ljemalloc

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/root/work/lib/jemalloc/lib32

C++ benchmarks:

523.xalancbmk\_r: -L/root/work/lib/jemalloc/lib32



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7371)

SPECrate2017\_int\_base = 196

SPECrate2017\_int\_peak = 212

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-11-23 05:25:21-0500.  
Report generated on 2019-02-20 15:21:01 by CPU2017 PDF formatter v6067.  
Originally published on 2018-12-11.