



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081


Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

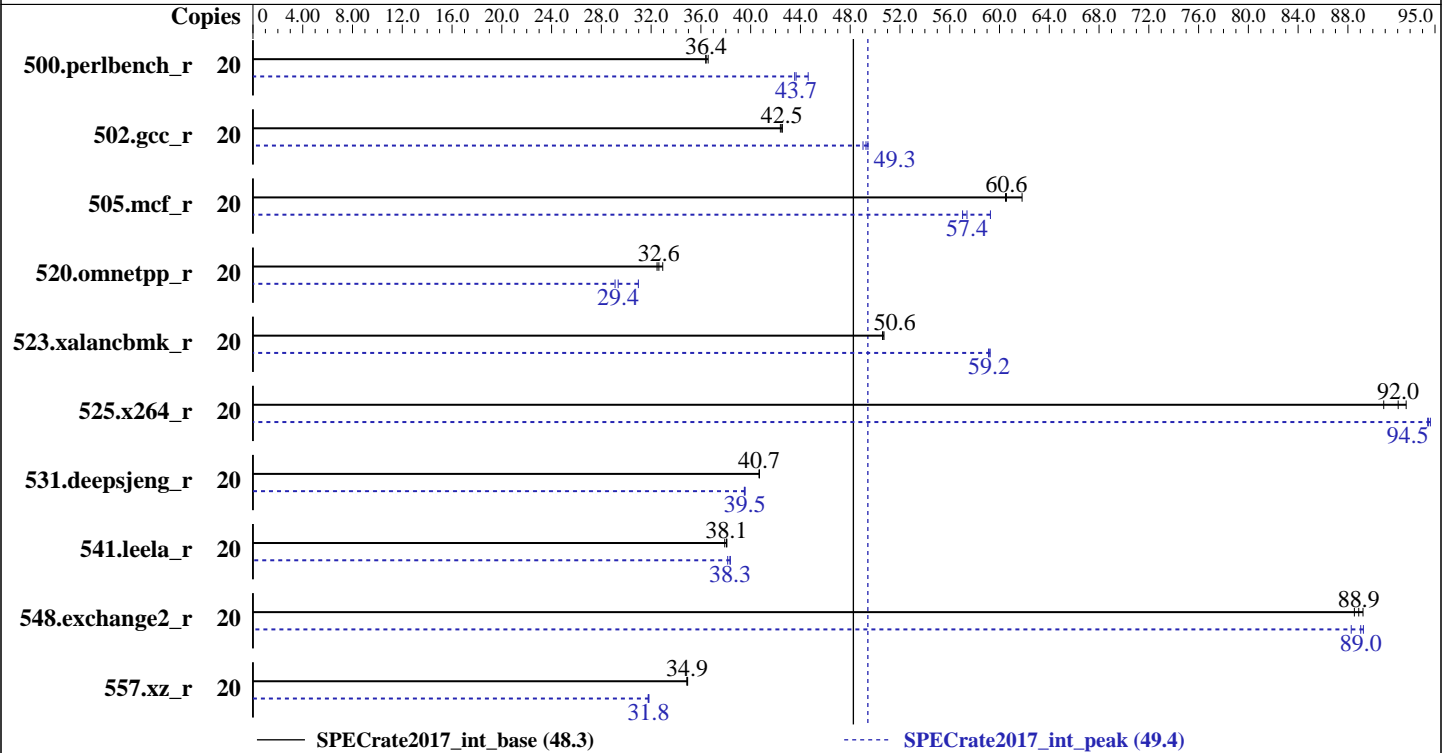

## Hardware

CPU Name: Intel Xeon Silver 4114  
 Max MHz.: 3000  
 Nominal: 2200  
 Enabled: 10 cores, 1 chip, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 960 GB SSD SATA III  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version BIOS 3.0a released Jan-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	20	<b>874</b>	<b>36.4</b>	875	36.4	870	36.6	20	714	44.6	731	43.5	<b>729</b>	<b>43.7</b>
502.gcc_r	20	666	42.5	<b>666</b>	<b>42.5</b>	668	42.4	20	573	49.4	<b>575</b>	<b>49.3</b>	578	49.0
505.mcf_r	20	534	60.5	523	61.8	<b>534</b>	<b>60.6</b>	20	545	59.3	<b>563</b>	<b>57.4</b>	567	57.0
520.omnetpp_r	20	797	32.9	808	32.5	<b>804</b>	<b>32.6</b>	20	847	31.0	<b>894</b>	<b>29.4</b>	902	29.1
523.xalancbmk_r	20	416	50.7	417	50.6	<b>417</b>	<b>50.6</b>	20	357	59.1	356	59.3	<b>357</b>	<b>59.2</b>
525.x264_r	20	385	90.9	<b>380</b>	<b>92.0</b>	378	92.7	20	<b>371</b>	<b>94.5</b>	370	94.6	371	94.4
531.deepsjeng_r	20	563	40.7	<b>563</b>	<b>40.7</b>	563	40.7	20	580	39.5	<b>580</b>	<b>39.5</b>	580	39.5
541.leela_r	20	873	37.9	<b>870</b>	<b>38.1</b>	870	38.1	20	863	38.4	868	38.2	<b>864</b>	<b>38.3</b>
548.exchange2_r	20	592	88.5	587	89.2	<b>590</b>	<b>88.9</b>	20	587	89.2	594	88.3	<b>589</b>	<b>89.0</b>
557.xz_r	20	<b>619</b>	<b>34.9</b>	618	34.9	619	34.9	20	680	31.8	<b>679</b>	<b>31.8</b>	679	31.8

SPECrate2017\_int\_base = 48.3

SPECrate2017\_int\_peak = 49.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc:

configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

sources available via jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

Turbo Mode = Enable

Enhanced Halt State (C1E) = Disable

CPU C6 report = Disabled

Package C State = No limit

Software Controlled T-States = Disable

Hyper-Threading (All) = Enable

Enforce POR = Disable

Memory Frequency = 2400

Patrol Scrub = Disabled

IMC Interleaving = Auto

SNC = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on SUT Fri Mar 1 12:33:14 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz

1 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    20
On-line CPU(s) list:      0-19
Thread(s) per core:       2
Core(s) per socket:       10
Socket(s):                 1
NUMA node(s):             1
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                    85
Model name:                Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
Stepping:                 4
CPU MHz:                  2201.000
CPU max MHz:              2201.0000
CPU min MHz:              800.0000
BogoMIPS:                 4400.00
Virtualization:           VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 14080K
NUMA node0 CPU(s):       0-19
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 195231 MB
node 0 free: 190036 MB
node distances:
node 0
0: 10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

MemTotal: 196471408 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

run-level 3 Mar 1 12:32

SPEC is set to: /cpu2017.1.0

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  825G   76G  708G  10% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0a 01/12/2019

Memory:

```
6x NO DIMM NO DIMM
6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
525.x264_r(base, peak) 557.xz_r(base, peak)  
=====
```

```
icc (ICC) 18.0.0 20170811
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

**CPU2017 License:** 9081

**Test Date:** Mar-2019

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Hardware Availability:** Sep-2017

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Software Availability:** Mar-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(peak) 523.xalanbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Mar-2019

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Mar-2019

Hardware Availability: Sep-2017

Software Availability: Mar-2018

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_int\_base = 48.3

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_peak = 49.4

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

525.x264\_r (continued):

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017\_int\_base = 48.3

SPECrate2017\_int\_peak = 49.4

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Mar-2019

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2019-03-01 06:33:13-0500.

Report generated on 2019-03-19 14:57:42 by CPU2017 PDF formatter v6067.

Originally published on 2019-03-19.