



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081


Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

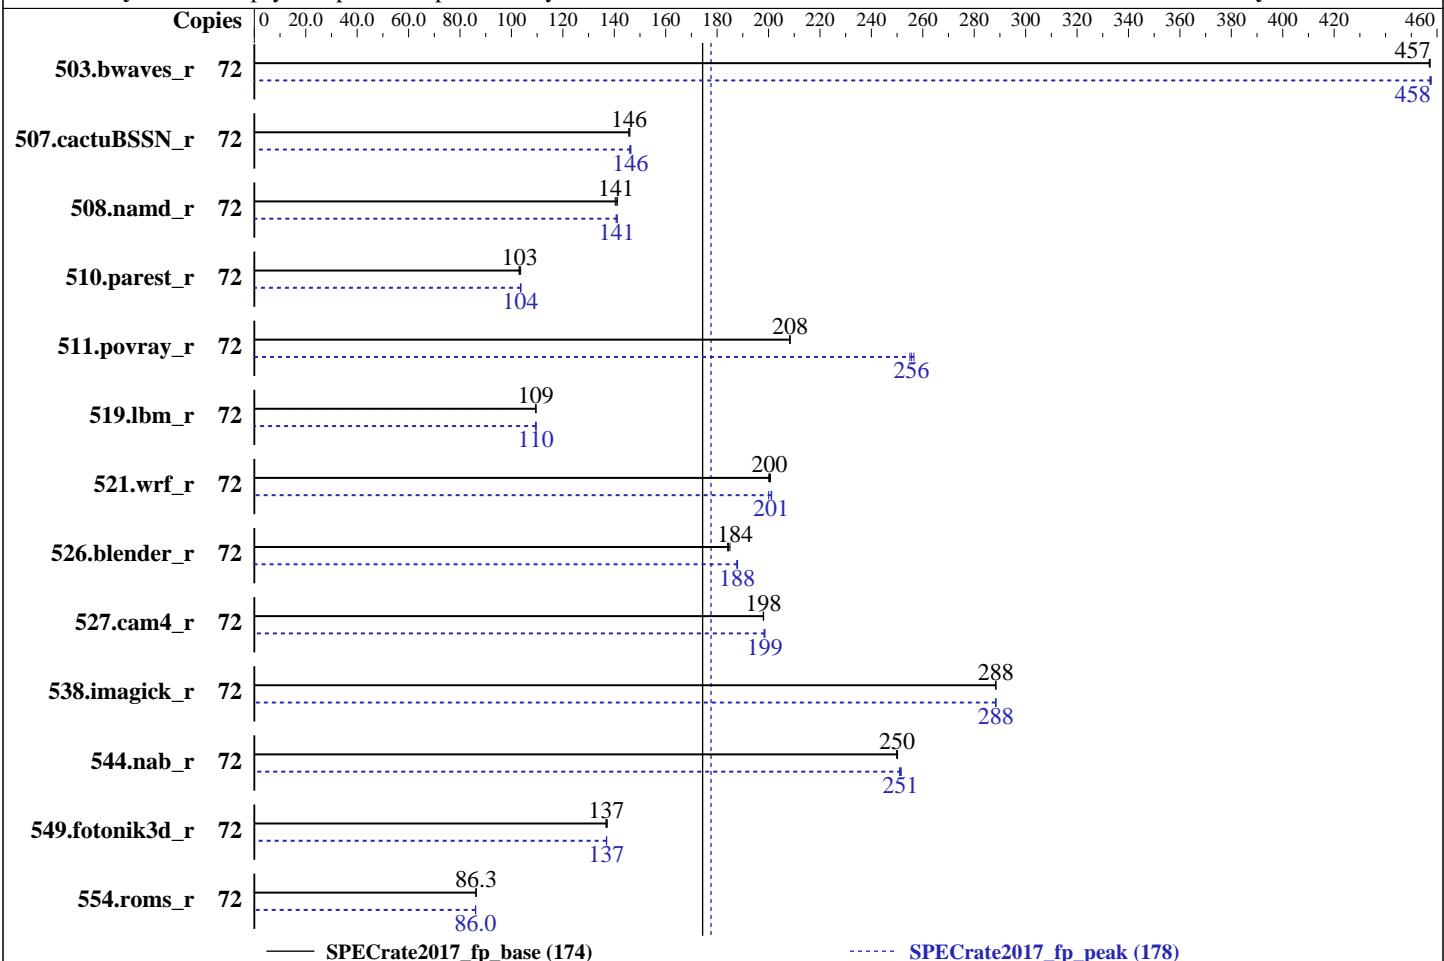

Hardware		Software	
CPU Name:	Intel Xeon Gold 6140	OS:	CentOS Linux release 7.6.1810
Max MHz.:	3700		3.10.0-862.9.1.el7.x86_64
Nominal:	2300	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Enabled:	36 cores, 2 chips, 2 threads/core		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version BIOS R0016 released Feb-2019
L2:	1 MB I+D on chip per core	File System:	ext4
L3:	24.75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)	Peak Pointers:	64-bit
Storage:	1 x 1200 GB SSD SATA III	Other:	None
Other:	None		



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	1579	457	1579	457	1580	457	72	1579	457	1578	458	1577	458
507.cactuBSSN_r	72	625	146	624	146	626	146	72	622	146	623	146	624	146
508.namd_r	72	486	141	484	141	487	140	72	485	141	486	141	484	141
510.parest_r	72	1818	104	1825	103	1829	103	72	1816	104	1819	104	1819	104
511.povray_r	72	807	208	807	208	807	208	72	655	257	659	255	658	256
519.lbm_r	72	693	110	693	109	693	109	72	692	110	693	110	693	109
521.wrf_r	72	806	200	805	200	803	201	72	802	201	806	200	802	201
526.blender_r	72	595	184	596	184	593	185	72	584	188	583	188	584	188
527.cam4_r	72	636	198	636	198	636	198	72	635	198	634	199	634	199
538.imagick_r	72	621	288	621	288	621	288	72	621	288	621	288	621	288
544.nab_r	72	485	250	484	250	485	250	72	482	251	482	252	483	251
549.fotonik3d_r	72	2048	137	2052	137	2044	137	72	2049	137	2048	137	2047	137
554.roms_r	72	1326	86.3	1326	86.3	1327	86.2	72	1329	86.1	1330	86.0	1330	86.0
SPECrate2017_fp_base = 174														
SPECrate2017_fp_peak = 178														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/aflinta/cpu2017.1.0/lib/intel64:

/home/aflinta/cpu2017.1.0/je5.0.1-32:/home/aflinta/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS Settings:

Intel(R) Hyper-Threading Tech = Enabled

CPU Power and Performance Policy = Performance

Intel(R) Turbo Boost Technology = Enabled

C1E = Disabled

Processor C6 = Disabled

IMC Interleaving = Auto

Sub_NUMA Cluster = Disabled

Set FAN Profile = Performance

Patrol Scrub = Disabled

```
Sysinfo program /home/aflinta/cpu2017.1.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on node306 Tue Mar 12 01:29:53 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
  2 "physical id"s (chips)
  72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 18
  siblings   : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	72
On-line CPU(s) list:	0-71

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
Stepping: 4
CPU MHz: 2610.943
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-17,36-53
NUMA node1 CPU(s): 18-35,54-71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 36 37 38 39 40 41 42 43 44 45
46 47 48 49 50 51 52 53
node 0 size: 391878 MB
node 0 free: 382688 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 54 55 56 57 58 59 60
61 62 63 64 65 66 67 68 69 70 71
node 1 size: 393216 MB
node 1 free: 384299 MB
node distances:
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174

SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Platform Notes (Continued)

```
node    0    1
      0: 10  21
      1: 21  10
```

```
From /proc/meminfo
  MemTotal:       791229532 kB
  HugePages_Total:       0
  Hugepagesize:        2048 kB
```

```
/usr/bin/lsb_release -d
  CentOS Linux release 7.6.1810 (Core)
```

```
From /etc/*release* /etc/*version*
  centos-release: CentOS Linux release 7.6.1810 (Core)
  centos-release-upstream: Derived from Red Hat Enterprise Linux 7.6 (Source)
  cm-release:
    Cluster Manager v8.1
    slave
  os-release:
    NAME="CentOS Linux"
    VERSION="7 (Core)"
    ID="centos"
    ID_LIKE="rhel fedora"
    VERSION_ID="7"
    PRETTY_NAME="CentOS Linux 7 (Core)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:centos:centos:7"
  redhat-release: CentOS Linux release 7.6.1810 (Core)
  system-release: CentOS Linux release 7.6.1810 (Core)
  system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
  Linux node306 3.10.0-862.9.1.el7.x86_64 #1 SMP Mon Jul 16 16:29:36 UTC 2018 x86_64
  x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 11 15:12
```

```
SPEC is set to: /home/aflinta/cpu2017.1.0
  Filesystem      Type  Size  Used Avail Use% Mounted on
  master:/home    nfs   1.5T  830G  563G  60%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Intel Corporation SE5C620.86B.00.01.0016.020120190930 02/01/2019
  Memory:
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Platform Notes (Continued)

24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa
eterio 220 RA1 (Intel Xeon Gold 6140, 2.30 GHz)

SPECrate2017_fp_base = 174
SPECrate2017_fp_peak = 178

CPU2017 License: 9081

Test Date: Mar-2019

Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Software Availability: Jul-2018

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-03-11 18:29:52-0400.

Report generated on 2019-04-02 16:56:55 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.