



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Feb-2019  
Hardware Availability: Apr-2019  
Software Availability: Mar-2019

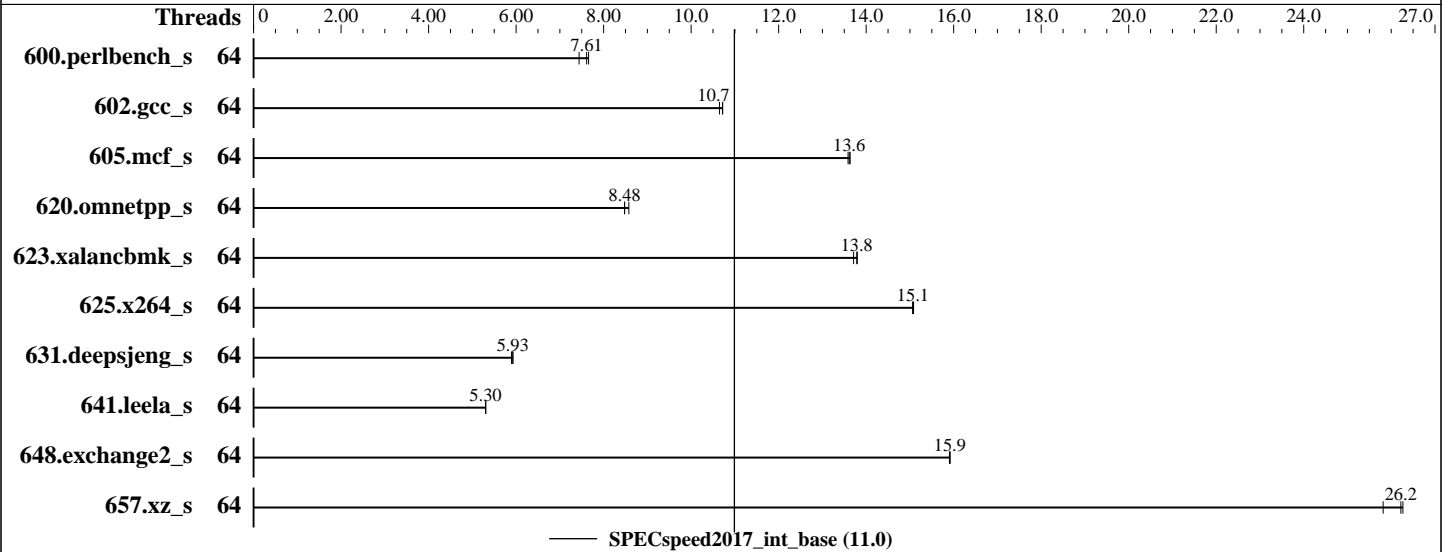

### Hardware

CPU Name: Intel Xeon Gold 6244  
Max MHz.: 4400  
Nominal: 3600  
Enabled: 32 cores, 4 chips, 2 threads/core  
Orderable: 1,2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 1.92 TB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
3.10.0-957.el7.x86\_64  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
Parallel: Yes  
Firmware: Version 3.0a released Feb-2019 tested as Jan-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Feb-2019  
Hardware Availability: Apr-2019  
Software Availability: Mar-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	239	7.44	<b><u>233</u></b>	<b><u>7.61</u></b>	232	7.66							
602.gcc_s	64	374	10.6	<b><u>372</u></b>	<b><u>10.7</u></b>	371	10.7							
605.mcf_s	64	347	13.6	346	13.6	<b><u>347</u></b>	<b><u>13.6</u></b>							
620.omnetpp_s	64	<b><u>192</u></b>	<b><u>8.48</u></b>	192	8.48	190	8.58							
623.xalancbmk_s	64	103	13.7	103	13.8	<b><u>103</u></b>	<b><u>13.8</u></b>							
625.x264_s	64	<b><u>117</u></b>	<b><u>15.1</u></b>	117	15.1	117	15.1							
631.deepsjeng_s	64	243	5.89	242	5.93	<b><u>242</u></b>	<b><u>5.93</u></b>							
641.leela_s	64	322	5.31	322	5.30	<b><u>322</u></b>	<b><u>5.30</u></b>							
648.exchange2_s	64	185	15.9	185	15.9	<b><u>185</u></b>	<b><u>15.9</u></b>							
657.xz_s	64	239	25.8	<b><u>236</u></b>	<b><u>26.2</u></b>	235	26.3							

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Mar-2019

### Platform Notes

BIOS Settings:

Intel Virtualization Technology = Disable  
SNC = Disable  
Stale AtoS = Enable  
LLC Dead Line Alloc = Disable  
IMC Interleaving = 1-way Interleave  
Patrol Scrub = Disable  
Power Performance Tuning = BIOS Controls EPB  
Energy Performance BIAS Setting = Max Performance  
Enhanced Halt State (C1E) = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on 116-252.pnet Fri Feb 22 11:44:44 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 2 8 9 18 19 20 25 27
physical 1: cores 4 8 17 18 19 24 25 27
physical 2: cores 1 3 4 9 17 18 25 27
physical 3: cores 2 4 17 18 19 24 25 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             4
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
Stepping:              6
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Mar-2019

### Platform Notes (Continued)

```

CPU MHz: 3601.000
CPU max MHz: 3601.0000
CPU min MHz: 1200.0000
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-7,32-39
NUMA node1 CPU(s): 8-15,40-47
NUMA node2 CPU(s): 16-23,48-55
NUMA node3 CPU(s): 24-31,56-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 196192 MB
node 0 free: 191554 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 196608 MB
node 1 free: 192108 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
node 2 size: 196608 MB
node 2 free: 192063 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 196608 MB
node 3 free: 192140 MB
node distances:
node  0  1  2  3
 0:  10  21  21  21
 1:  21  10  21  21

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Mar-2019

### Platform Notes (Continued)

```
2: 21 21 10 21
3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal:      792150056 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux 116-252.pnet 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

run-level 3 Feb 22 11:40

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   1.7T  251G  1.5T  15% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0a 01/23/2019

Memory:

48x Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Mar-2019

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6244)

SPECspeed2017\_int\_base = 11.0

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Mar-2019

## Base Portability Flags (Continued)

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmallocc

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-02-22 14:44:44-0500.  
Report generated on 2019-04-02 16:59:46 by CPU2017 PDF formatter v6067.  
Originally published on 2019-04-02.