



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Apr-2019

Hardware Availability: Dec-2018

Software Availability: Aug-2018

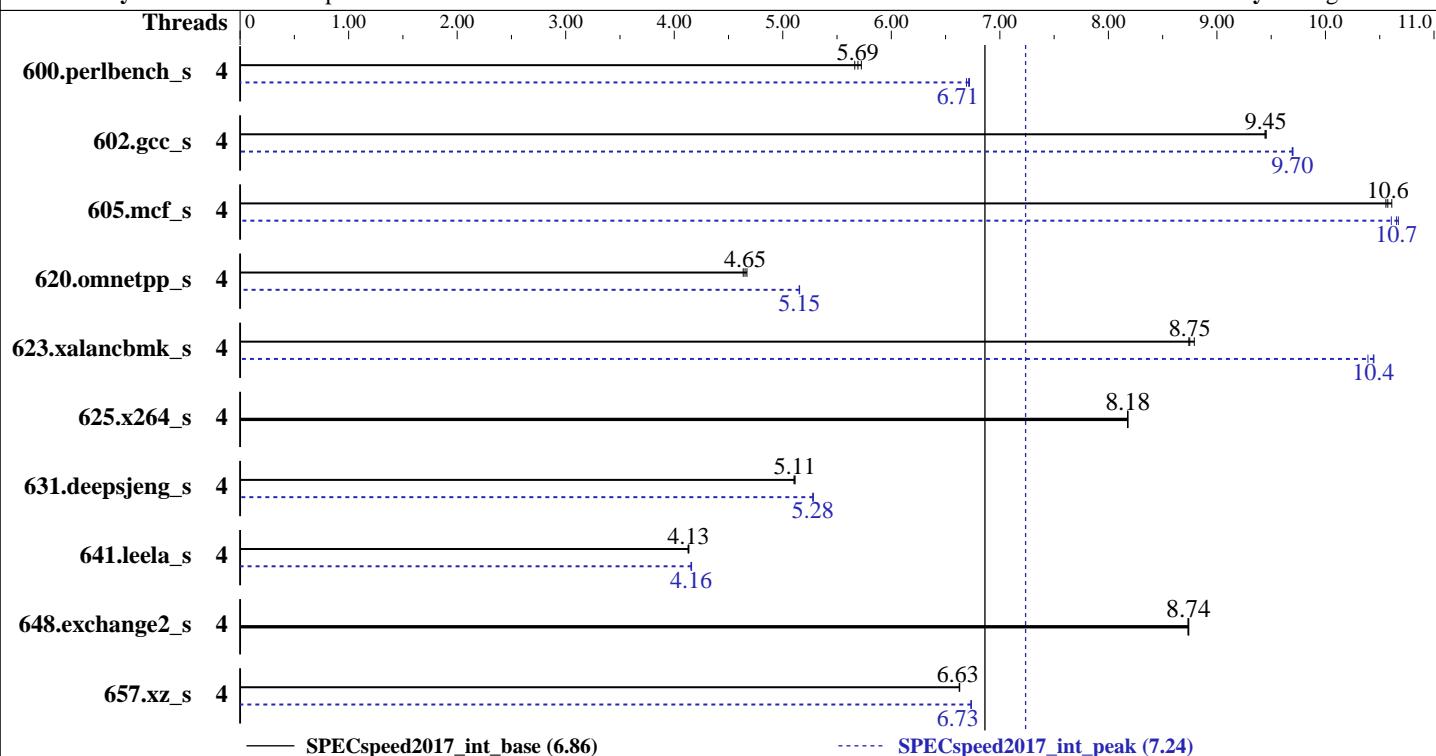

| Hardware   |   | Software       |  |
|------------|---|----------------|--|
| CPU Name:  | Intel Pentium Gold G5400                            | OS:            | Red Hat Enterprise Linux Server release 7.5 (Maipo)  |
| Max MHz.:  | 3700  | Compiler:      | Kernel 3.10.0-862.11.6.el7.x86_64<br>C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Nominal:   | 3700  | Parallel:      | Yes  |
| Enabled:   | 2 cores, 1 chip, 2 threads/core                     | Firmware:      | NEC BIOS Version F09 12/04/2018 released Feb-2019  |
| Orderable: | 1 chip  | File System:   | ext4   |
| Cache L1:  | 32 KB I + 32 KB D on chip per core                  | System State:  | Run level 3 (multi-user)   |
| L2:        | 256 KB I+D on chip per core                         | Base Pointers: | 64-bit   |
| L3:        | 4 MB I+D on chip per chip                           | Peak Pointers: | 32/64-bit  |
| Other:     | None  | Other:         | jemalloc memory allocator V5.0.1   |
| Memory:    | 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400) |                |  |
| Storage:   | 1 x 4 TB SATA, 7200 RPM                             |                |  |
| Other:     | None  |                |  |



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

Test Date: Apr-2019

Hardware Availability: Dec-2018

Software Availability: Aug-2018

## Results Table

| Benchmark                            | Base    |            |             |            |             |            |             |         | Peak       |             |            |             |            |             |         |       |
|--------------------------------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|-------|
|                                      | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio |
| 600.perlbench_s                      | 4       | 313        | 5.66        | <b>312</b> | <b>5.69</b> | 310        | 5.72        | 4       | 264        | 6.72        | 265        | 6.69        | <b>264</b> | <b>6.71</b> |         |       |
| 602.gcc_s                            | 4       | <b>421</b> | <b>9.45</b> | 421        | 9.45        | 422        | 9.44        | 4       | <b>411</b> | <b>9.70</b> | 410        | 9.70        | 411        | 9.69        |         |       |
| 605.mcf_s                            | 4       | <b>446</b> | <b>10.6</b> | 447        | 10.6        | 445        | 10.6        | 4       | 442        | 10.7        | <b>443</b> | <b>10.7</b> | 445        | 10.6        |         |       |
| 620.omnetpp_s                        | 4       | 349        | 4.67        | <b>351</b> | <b>4.65</b> | 352        | 4.64        | 4       | <b>317</b> | <b>5.15</b> | 316        | 5.15        | 317        | 5.15        |         |       |
| 623.xalancbmk_s                      | 4       | 161        | 8.79        | <b>162</b> | <b>8.75</b> | 162        | 8.74        | 4       | 136        | 10.4        | <b>136</b> | <b>10.4</b> | 136        | 10.4        |         |       |
| 625.x264_s                           | 4       | <b>216</b> | <b>8.18</b> | 216        | 8.18        | 216        | 8.18        | 4       | <b>216</b> | <b>8.18</b> | 216        | 8.18        | 216        | 8.18        |         |       |
| 631.deepsjeng_s                      | 4       | 280        | 5.11        | <b>280</b> | <b>5.11</b> | 281        | 5.10        | 4       | 272        | 5.28        | <b>271</b> | <b>5.28</b> | 271        | 5.28        |         |       |
| 641.leela_s                          | 4       | 413        | 4.13        | <b>413</b> | <b>4.13</b> | 413        | 4.13        | 4       | 411        | 4.15        | <b>410</b> | <b>4.16</b> | 410        | 4.16        |         |       |
| 648.exchange2_s                      | 4       | 336        | 8.74        | <b>336</b> | <b>8.74</b> | 337        | 8.73        | 4       | 336        | 8.74        | <b>336</b> | <b>8.74</b> | 337        | 8.73        |         |       |
| 657.xz_s                             | 4       | 933        | 6.63        | 932        | 6.63        | <b>933</b> | <b>6.63</b> | 4       | 918        | 6.73        | 918        | 6.74        | <b>918</b> | <b>6.73</b> |         |       |
| <b>SPECspeed2017_int_base = 6.86</b> |         |            |             |            |             |            |             |         |            |             |            |             |            |             |         |       |
| <b>SPECspeed2017_int_peak = 7.24</b> |         |            |             |            |             |            |             |         |            |             |            |             |            |             |         |       |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

SPECspeed2017\_int\_base = 6.86

SPECspeed2017\_int\_peak = 7.24

CPU2017 License: 9006

Test Date: Apr-2019

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2018

Tested by: NEC Corporation

Software Availability: Aug-2018

## Platform Notes

BIOS Settings:

VT-x: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on t110j Fri Apr 19 06:38:40 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) Gold G5400 CPU @ 3.70GHz
  1 "physical id"s (chips)
  4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 2
  siblings    : 4
  physical 0: cores 0 1
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                4
On-line CPU(s) list:  0-3
Thread(s) per core:   2
Core(s) per socket:   2
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
Model name:            Intel(R) Pentium(R) Gold G5400 CPU @ 3.70GHz
Stepping:               11
CPU MHz:                3618.023
CPU max MHz:           3700.0000
CPU min MHz:           800.0000
BogoMIPS:              7392.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                256K
L3 cache:                4096K
NUMA node0 CPU(s):     0-3
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
           pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

SPECspeed2017\_int\_base = 6.86

SPECspeed2017\_int\_peak = 7.24

CPU2017 License: 9006

Test Date: Apr-2019

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2018

Tested by: NEC Corporation

Software Availability: Aug-2018

## Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc  
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16  
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand  
lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp tpr_shadow vnmi  
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap  
clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window  
hwp_epp spec_ctrl intel_stibp flush_lld
```

```
/proc/cpuinfo cache data  
cache size : 4096 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0 1 2 3  
node 0 size: 65455 MB  
node 0 free: 63587 MB  
node distances:  
node 0  
0: 10
```

```
From /proc/meminfo  
MemTotal: 65895300 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.5 (Maipo)"  
ID="rhel"  
ID_LIKE="fedora"  
VARIANT="Server"  
VARIANT_ID="server"  
VERSION_ID="7.5"  
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:  
Linux t110j 3.10.0-862.11.6.el7.x86_64 #1 SMP Fri Aug 10 16:55:11 UTC 2018 x86_64  
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 19 06:33
```

```
SPEC is set to: /home/cpu2017
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110j (Intel Pentium Gold G5400)

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

**CPU2017 License:** 9006

**Test Date:** Apr-2019

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Dec-2018

**Tested by:** NEC Corporation

**Software Availability:** Aug-2018

## Platform Notes (Continued)

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3  | ext4 | 3.6T | 124G | 3.3T  | 4%   | /          |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. F09 12/04/2018

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base,  
peak) 657.xz\_s(base)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

CPU2017 License: 9006

Test Date: Apr-2019

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2018

Tested by: NEC Corporation

Software Availability: Aug-2018

## Compiler Version Notes (Continued)

=====

FC 648.exchange2\_s(base, peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110j (Intel Pentium Gold G5400)

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Apr-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Aug-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

623.xalancbmk\_s: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xSSE4.2 -qopt-prefetch -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110j (Intel Pentium Gold G5400)

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Apr-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Aug-2018

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xSSE4.2 -qopt-prefetch -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevB.xml>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110j (Intel Pentium Gold G5400)

**SPECspeed2017\_int\_base = 6.86**

**SPECspeed2017\_int\_peak = 7.24**

**CPU2017 License:** 9006

**Test Date:** Apr-2019

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Dec-2018

**Tested by:** NEC Corporation

**Software Availability:** Aug-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2019-04-18 17:38:39-0400.

Report generated on 2019-05-29 16:51:54 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.