



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

CPU2017 License: 55


Test Date: May-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

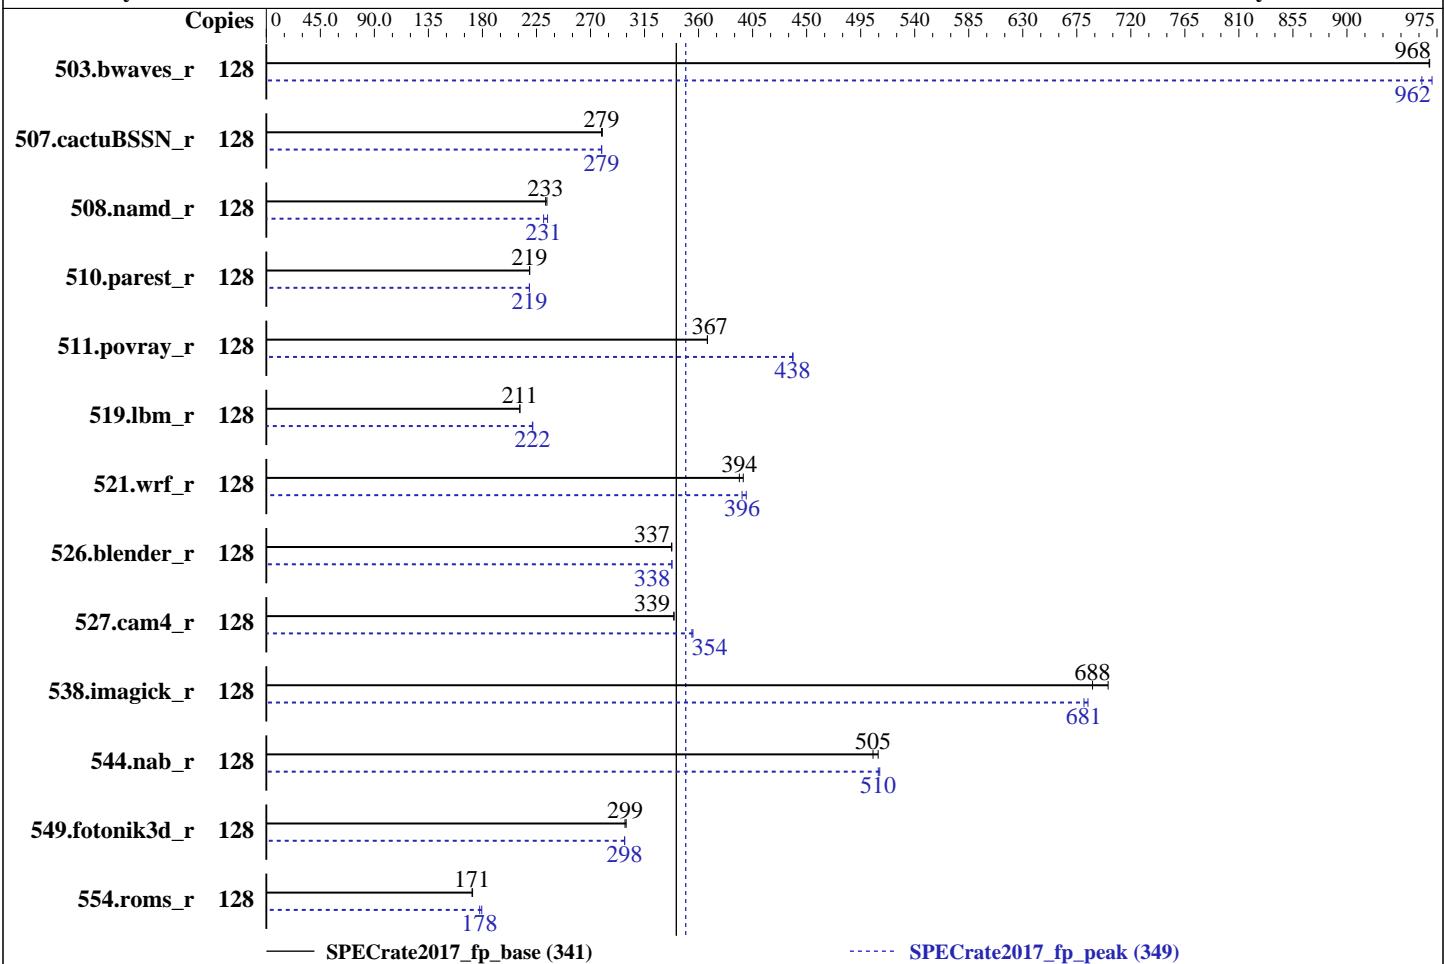

Hardware

CPU Name: Intel Xeon Platinum 8253
 Max MHz.: 3000
 Nominal: 2200
 Enabled: 64 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1.5 TB NVME SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 Compiler: kernel 4.15.0-45-generic
 C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Version 2.1.8 released Apr-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1325	968	1325	969			128	1334	962	1322	971				
507.cactusBSSN_r	128	580	279	579	280			128	580	279	580	279				
508.namd_r	128	523	233	520	234			128	519	234	527	231				
510.parest_r	128	1526	219	1528	219			128	1528	219	1528	219				
511.povray_r	128	814	367	813	367			128	681	439	682	438				
519.lbm_r	128	639	211	639	211			128	608	222	609	222				
521.wrf_r	128	722	397	728	394			128	717	400	724	396				
526.blender_r	128	577	338	578	337			128	577	338	577	338				
527.cam4_r	128	660	339	659	340			128	632	354	630	355				
538.imagick_r	128	454	701	463	688			128	465	684	467	681				
544.nab_r	128	426	505	423	510			128	422	511	423	510				
549.fotonik3d_r	128	1664	300	1670	299			128	1671	299	1672	298				
554.roms_r	128	1184	172	1187	171			128	1134	179	1145	178				

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

ADDDC setting disabled

Sub NUMA Cluster enabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Thu May 2 19:10:00 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8253 CPU @ 2.20GHz

4 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```

CPU op-mode(s):           32-bit, 64-bit
Byte Order:               Little Endian
CPU(s):                  128
On-line CPU(s) list:     0-127
Thread(s) per core:      2
Core(s) per socket:      16
Socket(s):                4
NUMA node(s):             8
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8253 CPU @ 2.20GHz
Stepping:                 6
CPU MHz:                 1859.254
BogoMIPS:                 4400.00
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 22528K
NUMA node0 CPU(s):        0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
NUMA node1 CPU(s):        1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
NUMA node2 CPU(s):        2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
NUMA node3 CPU(s):        3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
NUMA node4 CPU(s):        4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
NUMA node5 CPU(s):        5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
NUMA node6 CPU(s):        6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
NUMA node7 CPU(s):        7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                          pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
                          aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd mba ibrs
                          ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
                          bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx
                          smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
                          xsaves cqmq_llc cqmq_occu_llc cqmq_mbmq_total cqmq_mbmq_local dtherm ida arat pln pts pku
                          ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
```

```
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```
node 0 size: 95168 MB
node 0 free: 94786 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
node 1 size: 96764 MB
node 1 free: 96367 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
node 2 size: 96764 MB
node 2 free: 96384 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
node 3 size: 96764 MB
node 3 free: 96402 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
node 4 size: 96764 MB
node 4 free: 96413 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125
node 5 size: 96764 MB
node 5 free: 96390 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
node 6 size: 96764 MB
node 6 free: 96418 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 96742 MB
node 7 free: 96354 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  21  21  21  11  21  21  21
  1: 21  10  21  21  21  11  21  21
  2: 21  21  10  21  21  21  11  21
  3: 21  21  21  10  21  21  21  11
  4: 11  21  21  21  10  21  21  21
  5: 21  11  21  21  21  10  21  21
  6: 21  21  11  21  21  21  10  21
  7: 21  21  21  11  21  21  21  10
```

```
From /proc/meminfo
MemTotal:      791040368 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 5 May 2 12:06

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	439G	26G	392G	7%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.8 04/30/2019

Memory:

```
12x 002C069D002C 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933
12x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
24x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
=====
```

```
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

CC 519.lbm_r(peak)

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CXXC 508.namd_r(base) 510.parest_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CXXC 508.namd_r(peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CC 511.povray_r(base) 526.blender_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
```

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
```

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
```

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 507.cactubSSN_r(base, peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8253, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 341

SPECrate2017_fp_peak = 349

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-02 15:10:00-0400.

Report generated on 2019-05-29 15:47:46 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.