



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

**SPECrate2017\_fp\_base = 264**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

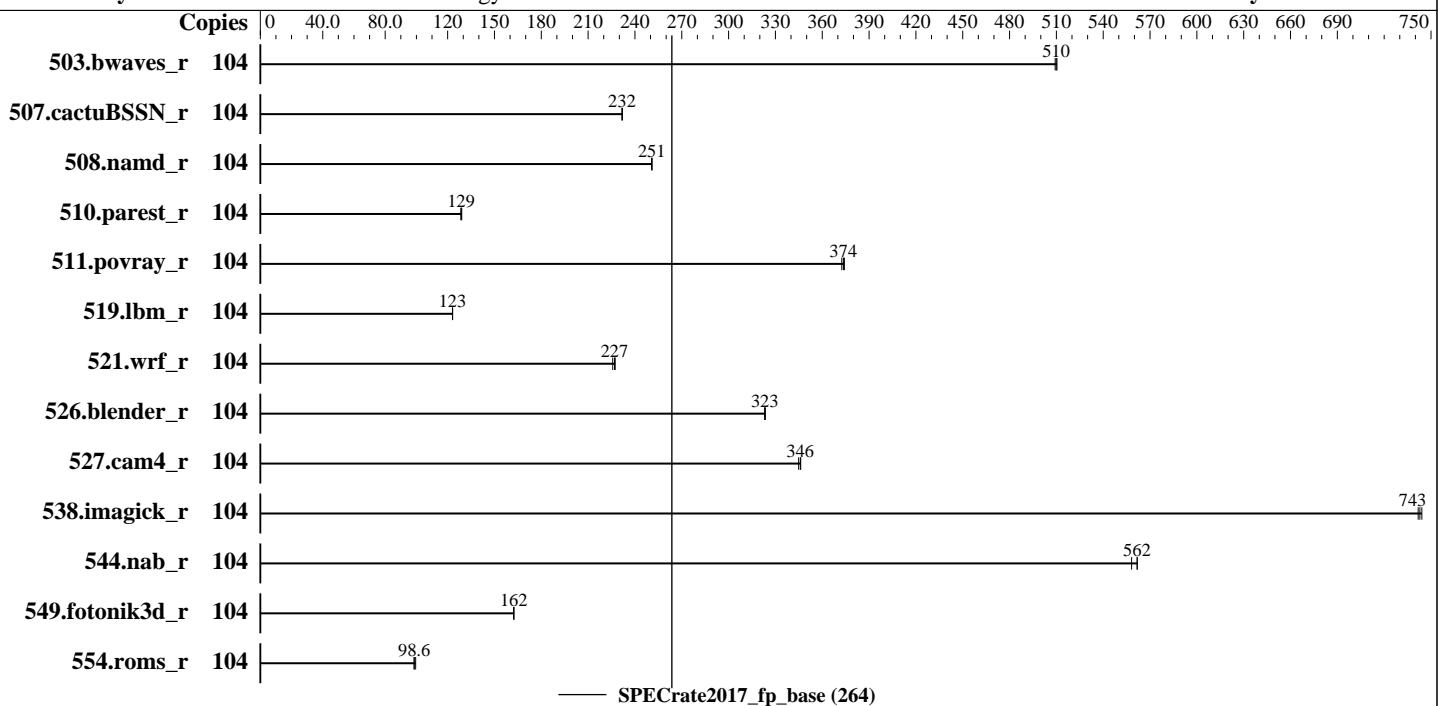

### Hardware

CPU Name: Intel Xeon Platinum 8270  
Max MHz.: 4000  
Nominal: 2700  
Enabled: 52 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
Compiler: Kernel 4.12.14-94.41-default  
C/C++: Version 19.0.0.117 of Intel  
C/C++ Compiler for Linux;  
Fortran: Version 19.0.0.117 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version OTE135R 2.10 released Feb-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

**SPECrate2017\_fp\_base = 264**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2048	509	<b>2045</b>	<b>510</b>	2043	510							
507.cactuBSSN_r	104	568	232	568	232	<b>568</b>	<b>232</b>							
508.namd_r	104	394	251	<b>394</b>	<b>251</b>	394	251							
510.parest_r	104	2109	129	<b>2115</b>	<b>129</b>	2116	129							
511.povray_r	104	652	373	649	374	<b>650</b>	<b>374</b>							
519.lbm_r	104	891	123	890	123	<b>890</b>	<b>123</b>							
521.wrf_r	104	1032	226	<b>1026</b>	<b>227</b>	1025	227							
526.blender_r	104	490	323	<b>490</b>	<b>323</b>	490	324							
527.cam4_r	104	<b>526</b>	<b>346</b>	527	345	525	346							
538.imagick_r	104	<b>348</b>	<b>743</b>	348	744	349	742							
544.nab_r	104	312	562	314	558	<b>312</b>	<b>562</b>							
549.fotonik3d_r	104	<b>2495</b>	<b>162</b>	2495	162	2498	162							
554.roms_r	104	1678	98.5	1661	99.5	<b>1676</b>	<b>98.6</b>							

**SPECrate2017\_fp\_base = 264**

**SPECrate2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

MONITOR/MWAIT set to Enable

DCU Streamer Prefetcher set to Disable

SNC set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-y34g Thu May 9 18:49:35 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28  
29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28  
29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

**SPECrate2017\_fp\_base = 264**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Platform Notes (Continued)

```

Core(s) per socket: 26
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping: 6
CPU MHz: 2700.000
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s): 4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s): 26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s): 30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 96335 MB
node 0 free: 96005 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 96752 MB
node 1 free: 95551 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Platform Notes (Continued)

```
node 2 size: 96752 MB
node 2 free: 96514 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 96750 MB
node 3 free: 96223 MB
node distances:
node   0   1   2   3
 0: 10 11 21 21
 1: 11 10 21 21
 2: 21 21 10 11
 3: 21 21 11 10

From /proc/meminfo
MemTotal:           395868984 kB
HugePages_Total:      0
Hugepagesize:        2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-y34g 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 May 9 18:45
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.0.5-ic19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	446G	60G	387G	14%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[OTE135R-2.10]- 02/25/2019

Memory:

4x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

FC 507.cactubSSN\_r(base)

=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-finite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-finite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-finite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-finite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_base = 264

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-09 18:49:34-0400.

Report generated on 2019-05-29 15:48:58 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.