



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13


Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: May-2019

Hardware Availability: Jun-2019

Software Availability: Mar-2019

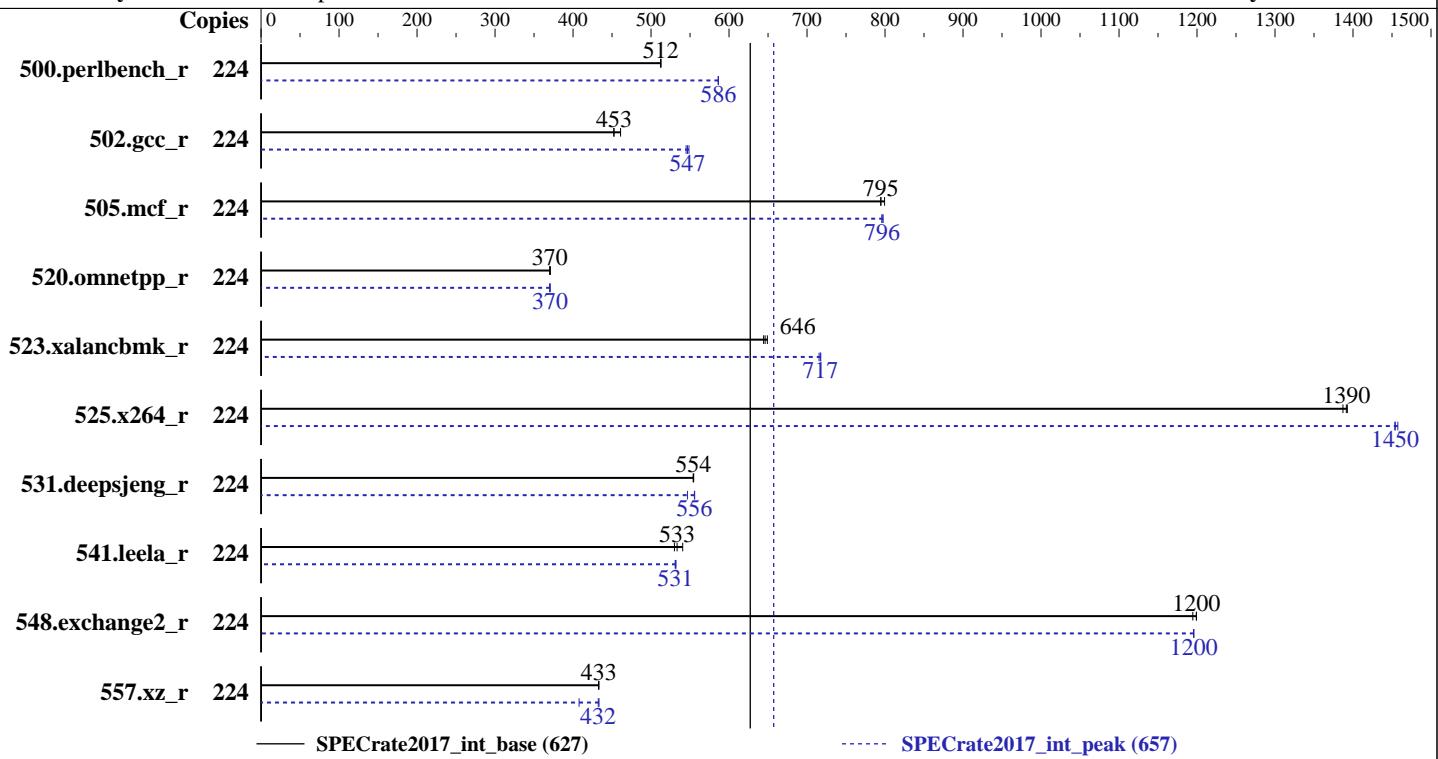

Hardware		Software	
CPU Name:	Intel Xeon Platinum 9282	OS:	CentOS Linux release 7.6.1810 (Core)
Max MHz.:	3800		3.10.0-957.10.1.el7.x86_64
Nominal:	2600	Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Enabled:	112 cores, 2 chips, 2 threads/core		Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Orderable:	2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version SE5C620.86B.0D.01.0492.042220190420 Released Apr-2019
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	77 MB I+D on chip per chip, 38.5 MB shared / 28 cores	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx8 PC4-2933Y-R, running at 2933)	Peak Pointers:	32/64-bit
Storage:	Toshiba XG5 NVMe SSD 512GB, M.2 PCIe	Other:	jemalloc memory allocator V5.0.1
Other:	None		



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

**SPECrate2017\_int\_base = 627**  
**SPECrate2017\_int\_peak = 657**

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	695	513	<b>696</b>	<b>512</b>	696	512	224	608	586	608	586	<b>608</b>	<b>586</b>		
502.gcc_r	224	<b>701</b>	<b>453</b>	688	461	701	452	224	582	545	578	549	<b>580</b>	<b>547</b>		
505.mcf_r	224	456	794	<b>455</b>	<b>795</b>	453	799	224	<b>455</b>	<b>796</b>	454	798	<b>455</b>	<b>796</b>		
520.omnetpp_r	224	794	370	792	371	<b>794</b>	<b>370</b>	224	<b>793</b>	<b>370</b>	793	371	<b>794</b>	<b>370</b>		
523.xalancbmk_r	224	<b>366</b>	<b>646</b>	364	649	367	644	224	<b>330</b>	<b>717</b>	330	718	<b>331</b>	<b>715</b>		
525.x264_r	224	283	1390	<b>282</b>	<b>1390</b>	282	1390	224	269	1460	270	1450	<b>270</b>	<b>1450</b>		
531.deepsjeng_r	224	463	554	463	555	<b>463</b>	<b>554</b>	224	462	556	<b>462</b>	<b>556</b>	470	547		
541.leela_r	224	<b>695</b>	<b>533</b>	686	541	700	530	224	697	532	<b>698</b>	<b>531</b>	699	531		
548.exchange2_r	224	<b>489</b>	<b>1200</b>	489	1200	491	1190	224	<b>491</b>	<b>1200</b>	491	1200	<b>491</b>	<b>1200</b>		
557.xz_r	224	559	433	559	433	<b>559</b>	<b>433</b>	224	<b>560</b>	<b>432</b>	558	433	593	408		

**SPECrate2017\_int\_base = 627**

**SPECrate2017\_int\_peak = 657**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/DCPerfKit/src/cpu2017/lib/ia32:/home/DCPerfKit/src/cpu2017/lib/intel64  
:/home/DCPerfKit/src/cpu2017/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

CPU Power and Performance Policy set to Performance

Advanced -> Power & Performance -> CPU Power and Performance Policy -> Performance  
IMC Interleaving set to 1-way Interleave

Advanced -> Memory Configuration -> IMC Interleaving -> 1-way Interleave  
Sub\_NUMA Cluster set to Enabled

Advanced -> Memory Configuration -> Memory RAS and Performance Configuration -> Sub\_NUMA Cluster -> Enabled  
Sysinfo program /home/DCPerfKit/src/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on localhost.localdomain Wed May 1 10:00:46 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Genuine Intel(R) CPU 0000%@  
 4 "physical id"s (chips)  
 224 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 56  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

## Platform Notes (Continued)

CPU(s): 224  
On-line CPU(s) list: 0-223  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Genuine Intel(R) CPU 0000%@  
Stepping: 6  
CPU MHz: 2153.283  
CPU max MHz: 3800.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 5200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135  
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139  
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163  
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167  
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191  
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195  
NUMA node6 CPU(s): 84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219  
NUMA node7 CPU(s): 88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movebe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_13 cdp\_13 intel\_pt ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni spec\_ctrl intel\_stibp flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation

Intel S9256WK1HLC

SPECrate2017\_int\_base = 627

SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

## Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 96973 MB
node 0 free: 94307 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
132 136 137 138 139
node 1 size: 98304 MB
node 1 free: 95865 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 98304 MB
node 2 free: 95811 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 98304 MB
node 3 free: 95857 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 98304 MB
node 4 free: 95907 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 98304 MB
node 5 free: 95892 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 98304 MB
node 6 free: 95913 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 98304 MB
node 7 free: 95828 MB
node distances:
node   0    1    2    3    4    5    6    7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

MemTotal: 790947580 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation

Intel S9256WK1HLC

SPECrate2017\_int\_base = 627

SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: May-2019

Hardware Availability: Jun-2019

Software Availability: Mar-2019

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.6.1810 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.6 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.6.1810 (Core)
system-release: CentOS Linux release 7.6.1810 (Core)
system-release-cpe: cpe:/o:centos:centos:7

uname -a:
Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Mon Mar 18 15:06:45 UTC
2019 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

run-level 3 May 1 10:00

```
SPEC is set to: /home/DCPerfKit/src/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos-home xfs   395G  184G  211G  47%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.0D.01.0492.042220190420 04/22/2019

Memory:

24x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

The inconsistent CPU information under Platform notes is due to Kernel not recognizing the CPU model. The correct name of CPU is Intel Xeon Platinum 9282

The correct number of chips is 2, total number of threads is 224

More info about the CPU being used at <https://ark.intel.com/content/www/us/en/ark/products/194146/intel-xeon-platinum-9282-processor-77m-cache-2-60-ghz.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

## Compiler Version Notes

=====

CC 502.gcc\_r(peak)

=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----

=====

CC 500.perlbench\_r(peak)

=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----

=====

CXXC 523.xalancbmk\_r(peak)

=====

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----

=====

CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base, peak)

=====

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----

=====

FC 548.exchange2\_r(base, peak)

=====

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

-----

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation

Intel S9256WK1HLC

SPECrate2017\_int\_base = 627

SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: May-2019

Hardware Availability: Jun-2019

Software Availability: Mar-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Sponsor: Intel Corporation  
Tested by: Intel Corporation

Test Date: May-2019  
Hardware Availability: Jun-2019  
Software Availability: Mar-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation  
Intel S9256WK1HLC

SPECrate2017\_int\_base = 627  
SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019  
Hardware Availability: Jun-2019  
Software Availability: Mar-2019

Test Sponsor: Intel Corporation  
Tested by: Intel Corporation

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.1.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation

Intel S9256WK1HLC

SPECrate2017\_int\_base = 627

SPECrate2017\_int\_peak = 657

CPU2017 License: 13

Test Date: May-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Mar-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.1.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-01 13:00:45-0400.

Report generated on 2019-05-29 16:47:07 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.