



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10


(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

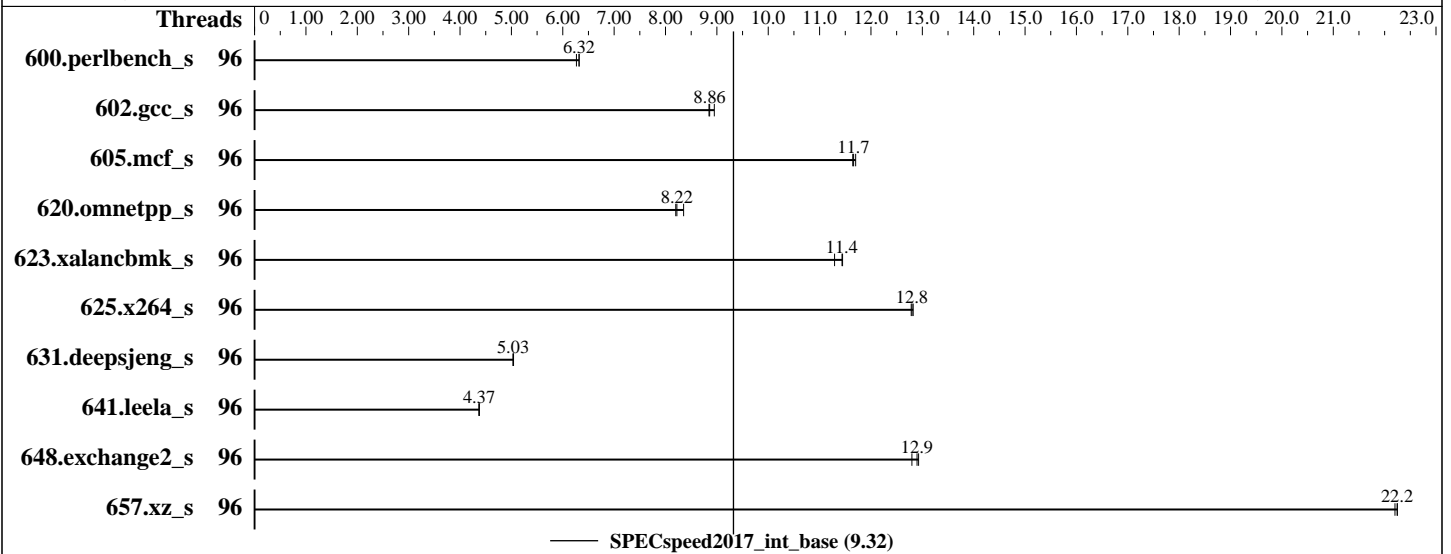

Hardware

CPU Name: Intel Xeon Gold 6262V
Max MHz.: 3600
Nominal: 1900
Enabled: 96 cores, 4 chips
Orderable: 2, 4 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
Storage: 1 x 480 GB SATA SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
Kernel 4.12.14-23-default
Compiler: C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux;
Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux
Parallel: Yes
Firmware: HPE BIOS Version I43 04/18/2019 released Apr-2019
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 96 | 281 | 6.32 | <u>281</u> | <u>6.32</u> | 283 | 6.27 | | | | | | | |
| 602.gcc_s | 96 | 445 | 8.95 | 450 | 8.85 | <u>449</u> | <u>8.86</u> | | | | | | | |
| 605.mcf_s | 96 | 403 | 11.7 | 405 | 11.6 | <u>405</u> | <u>11.7</u> | | | | | | | |
| 620.omnetpp_s | 96 | 195 | 8.35 | <u>198</u> | <u>8.22</u> | 199 | 8.20 | | | | | | | |
| 623.xalancbmk_s | 96 | <u>124</u> | <u>11.4</u> | 125 | 11.3 | 124 | 11.4 | | | | | | | |
| 625.x264_s | 96 | 138 | 12.8 | 138 | 12.8 | <u>138</u> | <u>12.8</u> | | | | | | | |
| 631.deepsjeng_s | 96 | <u>285</u> | <u>5.03</u> | 285 | 5.03 | 284 | 5.04 | | | | | | | |
| 641.leela_s | 96 | 390 | 4.37 | 390 | 4.37 | <u>390</u> | <u>4.37</u> | | | | | | | |
| 648.exchange2_s | 96 | 227 | 12.9 | <u>228</u> | <u>12.9</u> | 230 | 12.8 | | | | | | | |
| 657.xz_s | 96 | 278 | 22.2 | <u>278</u> | <u>22.2</u> | 278 | 22.2 | | | | | | | |

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64:/home/cpu2017_u2/je5.0.1-32:/home/cpu2017_u2/je5.0.1-64"
OMP_STACKSIZE = "192M"
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Peak Frequency Compute

Minimum Processor Idle Power Core C-State set to C1E State

Energy/Performance Bias set to Balanced Power

Workload Profile set to Custom

Numa Group Size Optimization set to Flat

Sysinfo program /home/cpu2017_u2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on sy660-gen10 Thu Jun 27 09:31:32 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 1

Core(s) per socket: 24

Socket(s): 4

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
Stepping: 7
CPU MHz: 1900.000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
NUMA node2 CPU(s): 48-71
NUMA node3 CPU(s): 72-95

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

/proc/cpuinfo cache data
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 193044 MB
node 0 free: 192457 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 193502 MB
node 1 free: 193237 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 193531 MB
node 2 free: 193355 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 193321 MB
node 3 free: 192942 MB

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

node distances:

| | | | | |
|------|----|----|----|----|
| node | 0 | 1 | 2 | 3 |
| 0: | 10 | 21 | 21 | 21 |
| 1: | 21 | 10 | 21 | 21 |
| 2: | 21 | 21 | 10 | 21 |
| 3: | 21 | 21 | 21 | 10 |

From /proc/meminfo

MemTotal: 791961784 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

uname -a:

Linux sy660-gen10 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Jun 27 09:31

SPEC is set to: /home/cpu2017_u2

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|-------|------|------|-------|------|------------|
| /dev/sdb2 | btvfs | 445G | 125G | 320G | 29% | /home |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I43 04/18/2019

Memory:

24x UNKNOWN NOT AVAILABLE

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
657.xz_s(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
FC 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 660 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECspeed2017_int_base = 9.32

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/home/cpu2017_u2/je5.0.1-64/ -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-06-27 10:31:31-0400.

Report generated on 2019-07-30 16:35:46 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-30.