



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF8260M5 (Intel Xeon Gold 5120)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate®2017\_fp\_base = 296**

**SPECrate®2017\_fp\_peak = 305**

**Test Date:** Aug-2019

**Hardware Availability:** Oct-2017

**Software Availability:** May-2019

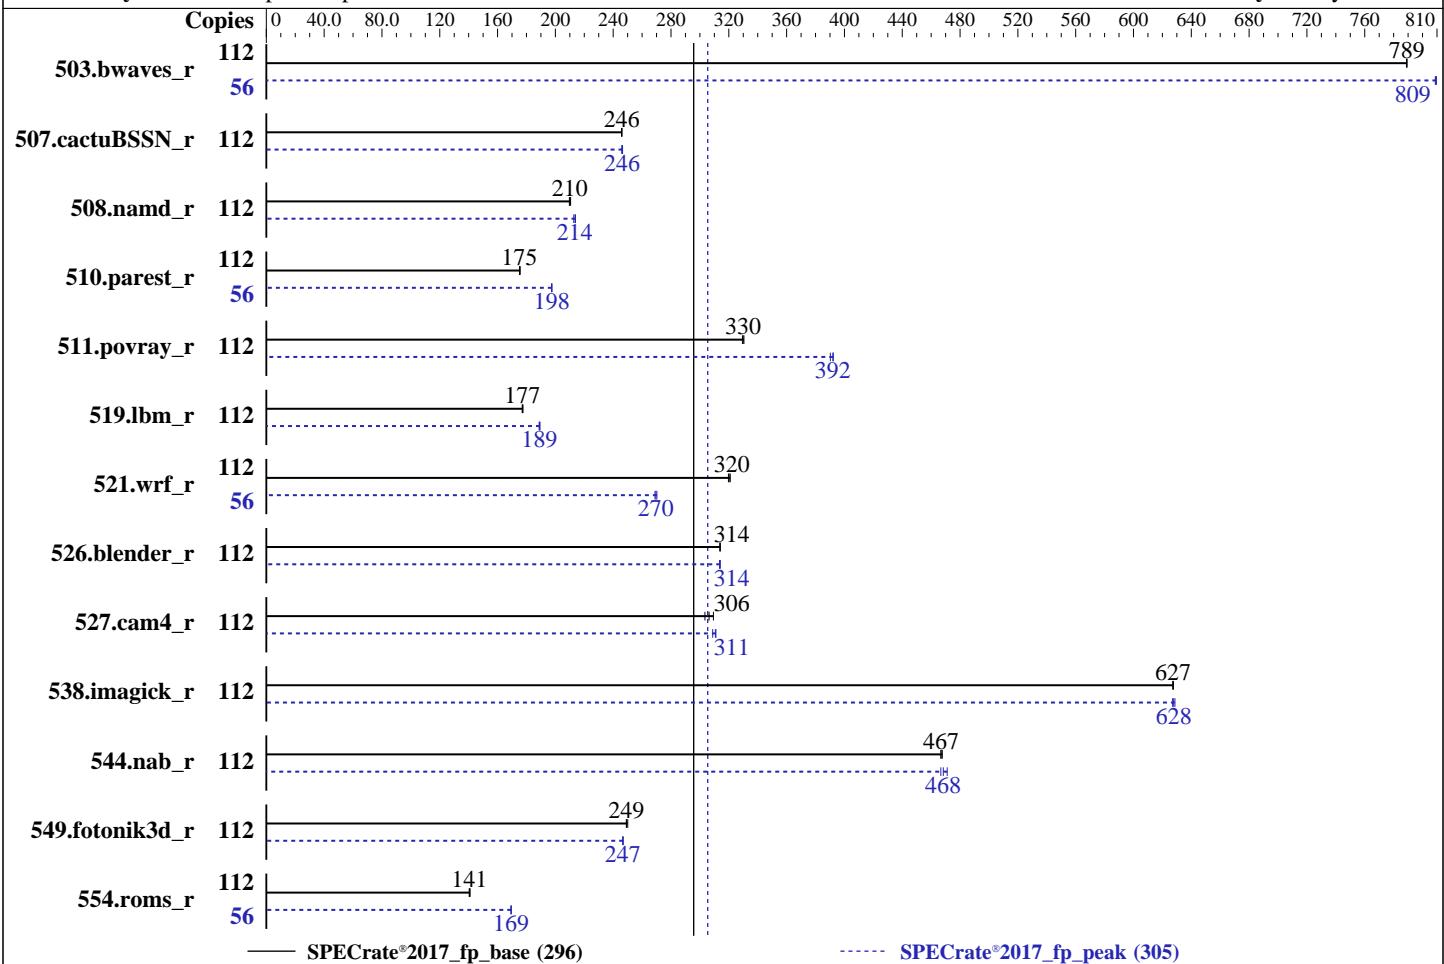

— SPECrate®2017\_fp\_base (296)

----- SPECrate®2017\_fp\_peak (305)

## Hardware

CPU Name:	Intel Xeon Gold 5120
Max MHz:	3200
Nominal:	2200
Enabled:	56 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	19.25 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 1Rx4 PC4-2666V-R, running at 2400)
Storage:	1 x 200 GB SATA SSD
Other:	None

## Software

OS:	SUSE Linux Enterprise Server 12 SP4
Compiler:	4.12.14-94.41-default
Parallel:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Firmware:	Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
File System:	No
System State:	Version 4.1.8 released Jun-2019
Base Pointers:	xfs
Peak Pointers:	Run level 3 (multi-user)
Other:	64-bit
Power Management:	64-bit
	None



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Gold 5120)

**SPECrate®2017\_fp\_base = 296**

**SPECrate®2017\_fp\_peak = 305**

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	1423	789	1424	789	<b>1423</b>	<b>789</b>	56	694	810	694	809	<b>694</b>	<b>809</b>		
507.cactusBSSN_r	112	577	246	576	246	<b>576</b>	<b>246</b>	112	<b>576</b>	<b>246</b>	575	246	<b>576</b>	<b>246</b>		
508.namd_r	112	505	211	<b>507</b>	<b>210</b>	507	210	112	<b>498</b>	<b>214</b>	497	214	500	213		
510.parest_r	112	1672	175	1668	176	<b>1672</b>	<b>175</b>	56	742	197	<b>742</b>	<b>198</b>	742	198		
511.povray_r	112	794	329	<b>793</b>	<b>330</b>	791	330	112	667	392	<b>667</b>	<b>392</b>	670	390		
519.lbm_r	112	667	177	<b>666</b>	<b>177</b>	665	178	112	625	189	623	189	<b>624</b>	<b>189</b>		
521.wrf_r	112	<b>783</b>	<b>320</b>	782	321	785	320	56	466	269	<b>465</b>	<b>270</b>	464	270		
526.blender_r	112	544	314	543	314	<b>543</b>	<b>314</b>	112	543	314	544	314	<b>544</b>	<b>314</b>		
527.cam4_r	112	633	309	645	303	<b>639</b>	<b>306</b>	112	630	311	634	309	<b>630</b>	<b>311</b>		
538.imagick_r	112	444	627	444	628	<b>444</b>	<b>627</b>	112	<b>444</b>	<b>628</b>	443	629	444	627		
544.nab_r	112	403	468	<b>404</b>	<b>467</b>	404	467	112	404	467	400	471	<b>402</b>	<b>468</b>		
549.fotonik3d_r	112	<b>1751</b>	<b>249</b>	1745	250	1752	249	112	1768	247	<b>1770</b>	<b>247</b>	1770	247		
554.roms_r	112	<b>1266</b>	<b>141</b>	1268	140	1262	141	56	525	169	526	169	<b>525</b>	<b>169</b>		

**SPECrate®2017\_fp\_base = 296**

**SPECrate®2017\_fp\_peak = 305**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS and OS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-8z2k Mon Aug 26 23:26:00 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz

4 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

Core(s) per socket: 14

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Inspur Corporation**

**SPECrate®2017\_fp\_base = 296**

**Inspur NF8260M5 (Intel Xeon Gold 5120)**

**SPECrate®2017\_fp\_peak = 305**

**CPU2017 License:** 3358

**Test Date:** Aug-2019

**Test Sponsor:** Inspur Corporation

**Hardware Availability:** Oct-2017

**Tested by:** Inspur Corporation

**Software Availability:** May-2019

## Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
Stepping: 4
CPU MHz: 2200.000
CPU max MHz: 3200.0000
CPU min MHz: 1000.0000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-3,7-9,56-59,63-65
NUMA node1 CPU(s): 4-6,10-13,60-62,66-69
NUMA node2 CPU(s): 14-17,21-23,70-73,77-79
NUMA node3 CPU(s): 18-20,24-27,74-76,80-83
NUMA node4 CPU(s): 28-31,35-37,84-87,91-93
NUMA node5 CPU(s): 32-34,38-41,88-90,94-97
NUMA node6 CPU(s): 42-45,49-51,98-101,105-107
NUMA node7 CPU(s): 46-48,52-55,102-104,108-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single pt
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_l1d

```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 56 57 58 59 63 64 65
node 0 size: 95256 MB
node 0 free: 84985 MB
node 1 cpus: 4 5 6 10 11 12 13 60 61 62 66 67 68 69
node 1 size: 96733 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
node 1 free: 90795 MB
node 2 cpus: 14 15 16 17 21 22 23 70 71 72 73 77 78 79
node 2 size: 96762 MB
node 2 free: 91071 MB
node 3 cpus: 18 19 20 24 25 26 27 74 75 76 80 81 82 83
node 3 size: 96762 MB
node 3 free: 91072 MB
node 4 cpus: 28 29 30 31 35 36 37 84 85 86 87 91 92 93
node 4 size: 96762 MB
node 4 free: 91069 MB
node 5 cpus: 32 33 34 38 39 40 41 88 89 90 94 95 96 97
node 5 size: 96762 MB
node 5 free: 91079 MB
node 6 cpus: 42 43 44 45 49 50 51 98 99 100 101 105 106 107
node 6 size: 96762 MB
node 6 free: 91025 MB
node 7 cpus: 46 47 48 52 53 54 55 102 103 104 108 109 110 111
node 7 size: 96548 MB
node 7 free: 90858 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  31  31  21  21
  1: 11  10  21  21  31  31  21  21
  2: 21  21  10  11  21  21  31  31
  3: 21  21  11  10  21  21  31  31
  4: 31  31  21  21  10  11  21  21
  5: 31  31  21  21  11  10  21  21
  6: 21  21  31  31  21  21  10  11
  7: 21  21  31  31  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      790888080 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux-8z2k 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Aug 26 13:24 last=5

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	182G	53G	129G	29%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.1.8 06/11/2019

Memory:

```
48x Micron 18ASF2G72PZ-2G6D1 16 GB 1 rank 2666, configured at 2400
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
           | 544.nab_r(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_fp\_base = 296

Inspur NF8260M5 (Intel Xeon Gold 5120)

SPECCrate®2017\_fp\_peak = 305

CPU2017 License: 3358

Test Date: Aug-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-26 23:25:58-0400.

Report generated on 2019-09-17 16:09:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.