



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10 (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

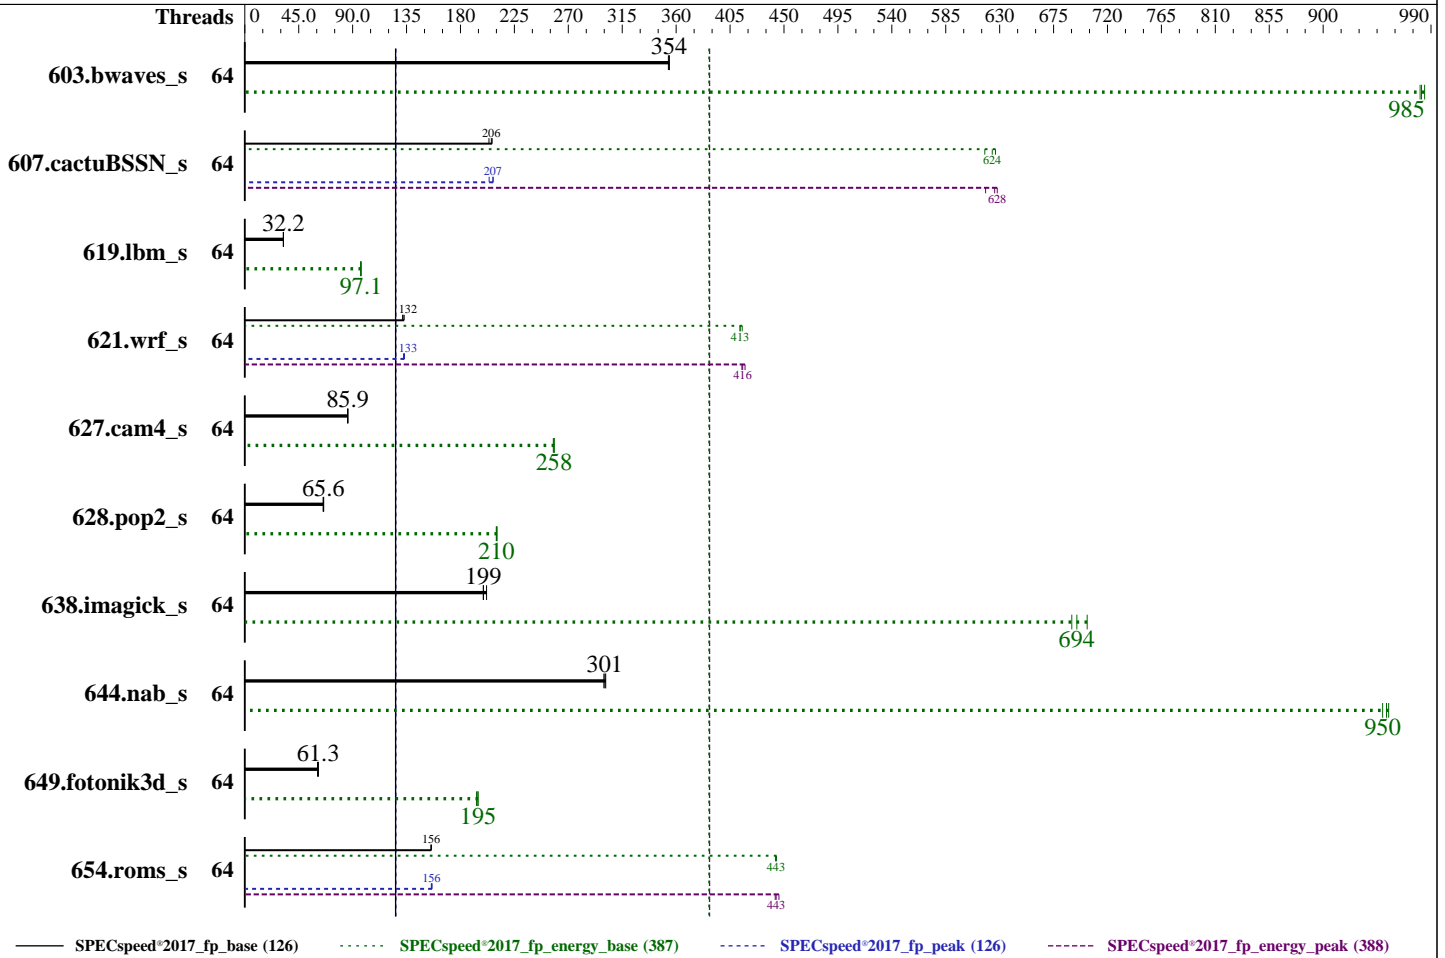

### Hardware

CPU Name: AMD EPYC 7702P  
 Max MHz: 3350  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2933Y-L)  
 Storage: 1 x HPE 480 GB SATA 6G SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) SP1  
 Kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version A41 07/20/2019 released Aug-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: Disabled



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL325 Gen10**  
**(2.00 GHz, AMD EPYC 7702P)**

SPECspeed®2017\_fp\_base = 126  
SPECspeed®2017\_fp\_energy\_base = 387  
SPECspeed®2017\_fp\_peak = 126  
SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Power

Max. Power (W): 400.27  
Idle Power (W): 191.07  
Min. Temperature (C): 20.75  
Elevation (m): 132  
Line Standard: 208 V / 60 Hz / 1 phase / 2 wires  
Provisioning: Line-powered

### Power Settings

Management FW: Version 1.43 of iLO5 released May 23 2019  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 800 W (non-redundant)  
Details: HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (865438-B21)  
Backplane: 8 SFF NVMe with optional optical drive  
Other Storage: Embedded SATA Controller  
Storage Model #: P05976-B21  
NICs Installed: 1 x HPE Ethernet 4-port 331i Adapter @ 1 Gb  
NICs Enabled (FW/OS): 4 / 4  
NICs Connected/Speed: 2 @ 1 Gb  
Other HW Model #: 7 x High Performance fans

### Power Analyzer

Power Analyzer: 10.216.1.15:8888  
Hardware Vendor: Yokogawa  
Model: YokogawaWT210  
Serial Number: 91K308562  
Input Connection: GPIB via NI GIPB-USB-HS  
Metrology Institute: NIST  
Calibration By: TRANSCAT  
Calibration Label: 5-E553M-20-1  
Calibration Date: 21-May-2019  
PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)  
Setup Description: SUT Power Supply 1 via neoXt NXB 20815  
Current Ranges Used: 1A, 2A  
Voltage Range Used: 300V

### Temperature Meter

Temperature Meter: 10.216.1.15:8889  
Hardware Vendor: Digi International Inc.  
Model: DigiWATCHPORT\_H  
Serial Number: V45297862  
Input Connection: USB  
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)  
Setup Description: 5 mm in front of SUT main intake

## Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	64	<b>167</b>	<b>354</b>	<b>65.4</b>	<b>985</b>	<b>392</b>	<b>399</b>	167	354	65.6	981	394	399	167	354	65.5	982	393	399
607.cactuBSSN_s	64	<b>81.0</b>	<b>206</b>	<b>29.2</b>	<b>624</b>	<b>361</b>	<b>376</b>	81.8	204	29.5	618	361	376	80.8	206	29.1	627	360	376
619.lbm_s	64	<b>163</b>	<b>32.2</b>	<b>61.3</b>	<b>97.1</b>	<b>377</b>	<b>383</b>	162	32.3	61.4	97.0	378	384	163	32.2	61.6	96.6	378	384
621.wrf_s	64	100	132	34.9	413	348	359	<b>100</b>	<b>132</b>	<b>34.9</b>	<b>413</b>	<b>349</b>	<b>359</b>	99.4	133	34.8	415	350	359
627.cam4_s	64	103	86.0	37.3	258	362	394	<b>103</b>	<b>85.9</b>	<b>37.4</b>	<b>258</b>	<b>362</b>	<b>393</b>	103	85.9	37.5	257	363	394
628.pop2_s	64	<b>181</b>	<b>65.6</b>	<b>62.1</b>	<b>210</b>	<b>343</b>	<b>355</b>	182	65.4	62.2	210	342	355	180	65.8	62.0	211	344	357
638.imagick_s	64	<b>72.4</b>	<b>199</b>	<b>22.6</b>	<b>694</b>	<b>313</b>	<b>358</b>	71.5	202	22.4	703	313	351	72.5	199	22.8	690	314	350
644.nab_s	64	58.0	301	19.9	955	343	356	58.3	300	19.9	953	342	356	<b>58.1</b>	<b>301</b>	<b>20.0</b>	<b>950</b>	<b>344</b>	<b>356</b>
649.fotonik3d_s	64	149	61.4	52.6	194	354	381	<b>149</b>	<b>61.3</b>	<b>52.6</b>	<b>195</b>	<b>353</b>	<b>380</b>	150	60.7	52.9	193	353	380
654.roms_s	64	101	156	39.7	443	393	399	101	155	39.7	444	391	398	<b>101</b>	<b>156</b>	<b>39.7</b>	<b>443</b>	<b>392</b>	<b>398</b>

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL325 Gen10**  
(2.00 GHz, AMD EPYC 7702P)

SPECSpeed®2017\_fp\_base = 126  
SPECSpeed®2017\_fp\_energy\_base = 387  
SPECSpeed®2017\_fp\_peak = 126  
SPECSpeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	64	<b>167</b>	<b>354</b>	<b>65.4</b>	<b>985</b>	<b>392</b>	<b>399</b>	167	354	65.6	981	394	399	167	354	65.5	982	393	399
607.cactuBSSN_s	64	80.4	207	29.1	626	362	377	81.7	204	29.5	618	361	376	<b>80.5</b>	<b>207</b>	<b>29.0</b>	<b>628</b>	<b>361</b>	<b>376</b>
619.lbm_s	64	<b>163</b>	<b>32.2</b>	<b>61.3</b>	<b>97.1</b>	<b>377</b>	<b>383</b>	162	32.3	61.4	97.0	378	384	163	32.2	61.6	96.6	378	384
621.wrf_s	64	99.8	132	34.8	415	349	358	99.2	133	34.6	417	349	358	<b>99.5</b>	<b>133</b>	<b>34.8</b>	<b>416</b>	<b>349</b>	<b>359</b>
627.cam4_s	64	103	86.0	37.3	258	362	394	<b>103</b>	<b>85.9</b>	<b>37.4</b>	<b>258</b>	<b>362</b>	<b>393</b>	103	85.9	37.5	257	363	394
628.pop2_s	64	<b>181</b>	<b>65.6</b>	<b>62.1</b>	<b>210</b>	<b>343</b>	<b>355</b>	182	65.4	62.2	210	342	355	180	65.8	62.0	211	344	357
638.imagick_s	64	<b>72.4</b>	<b>199</b>	<b>22.6</b>	<b>694</b>	<b>313</b>	<b>358</b>	71.5	202	22.4	703	313	351	72.5	199	22.8	690	314	350
644.nab_s	64	58.0	301	19.9	955	343	356	58.3	300	19.9	953	342	356	<b>58.1</b>	<b>301</b>	<b>20.0</b>	<b>950</b>	<b>344</b>	<b>356</b>
649.fotonik3d_s	64	149	61.4	52.6	194	354	381	<b>149</b>	<b>61.3</b>	<b>52.6</b>	<b>195</b>	<b>353</b>	<b>380</b>	150	60.7	52.9	193	353	380
654.roms_s	64	<b>101</b>	<b>156</b>	<b>39.7</b>	<b>443</b>	<b>393</b>	<b>399</b>	101	156	39.5	446	392	399	101	156	39.8	443	393	399

SPECSpeed®2017\_fp\_peak = 126

SPECSpeed®2017\_fp\_energy\_peak = 388

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/cpu2017/amd\_speed\_aocc200\_rome\_C\_lib/64:/cpu2017/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted\_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 00:02:18 EDT 2019

Submission: cpu2017-20190903-17798.sub

Submitted\_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 09:00:11 EDT 2019

Submission: cpu2017-20190903-17798.sub



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECSpeed®2017\_fp\_base = 126

SPECSpeed®2017\_fp\_energy\_base = 387

SPECSpeed®2017\_fp\_peak = 126

SPECSpeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Platform Notes

### BIOS Configuration:

AMD SMT Option set to Disabled  
 Thermal Configuration set to Maximum Cooling  
 Determinism Control set to Manual  
 Performance Determinism set to Power Deterministic  
 Memory Patrol Scrubbing set to Disabled  
 NUMA memory domains per socket set to Four memory domains per socket  
 Workload Profile set to General Peak Frequency Compute  
 Minimum Processor Idle Power Core C-State set to C6 State

Sysinfo program /cpu2017/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on dl325gen10 Sat Aug 31 19:41:38 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : AMD EPYC 7702P 64-Core Processor
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

### From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7702P 64-Core Processor
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```
Stepping: 0
CPU MHz: 2000.000
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3992.33
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
NUMA node2 CPU(s): 32-47
NUMA node3 CPU(s): 48-63
```

```
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64290 MB
node 0 free: 64154 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 64507 MB
node 1 free: 64367 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 2 size: 64507 MB
node 2 free: 64211 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
node 3 size: 64465 MB
node 3 free: 64330 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10 (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

### Platform Notes (Continued)

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

```
From /proc/meminfo
MemTotal:          263958144 kB
HugePages_Total:    0
Hugepagesize:      2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux dl325gen10 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
```

run-level 3 Aug 31 13:56

```
SPEC is set to: /cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    40G   11G   29G  28% /
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

BIOS: HPE A41 07/20/2019  
Vendor: HPE  
Product: ProLiant DL325 Gen10  
Product Family: ProLiant  
Serial: CN781302PS

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x UNKNOWN NOT AVAILABLE  
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

## Power Settings Notes

PTDaemon to measure power and temperature was run on a ProLiant DL360 Gen9 as a controller with 2x Intel Xeon E5-2660 v3 CPU and 128 GB of memory using Windows Server 2012 R2.

Power management in the OS was disabled by setting Linux CPU governor to performance for all cores:  
cpupower frequency-set -r -g performance

Power management in the BIOS was default except for any settings mentioned in BIOS Configuration. No power management settings were set in the management firmware.

The optional optical drive was not installed.

The system was configured with 7 HPE Small Form Factor Hard Drive Blanks (666987-B21), 8 DIMM blanks 2 high performance heatsinks and baffles that fit over the high performance heatsinks in order to produce correct airflow and cooling.

The run was started and observed through the management firmware.

The Embedded SATA controller was the HPE Smart Array S100i SR Gen10 SW RAID.

## Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

## ProLiant DL325 Gen10

## (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

### Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

### Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

### Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

### Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2019  
Hardware Availability: Oct-2019  
Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**  
(Test Sponsor: HPE)  
**ProLiant DL325 Gen10**  
**(2.00 GHz, AMD EPYC 7702P)**

SPECspeed®2017\_fp\_base = 126  
SPECspeed®2017\_fp\_energy\_base = 387  
SPECspeed®2017\_fp\_peak = 126  
SPECspeed®2017\_fp\_energy\_peak = 388

**CPU2017 License:** 003  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Aug-2019

## Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

### (2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

CPU2017 License: 003

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```

-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -mrecursive -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang

```

## Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017\_fp\_base = 126

SPECspeed®2017\_fp\_energy\_base = 387

SPECspeed®2017\_fp\_peak = 126

SPECspeed®2017\_fp\_energy\_peak = 388

**CPU2017 License:** 003

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Oct-2019

**Software Availability:** Aug-2019

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-08-31 20:41:37-0400.  
Report generated on 2019-09-17 16:19:28 by CPU2017 PDF formatter v6255.  
Originally published on 2019-09-17.