



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55


Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

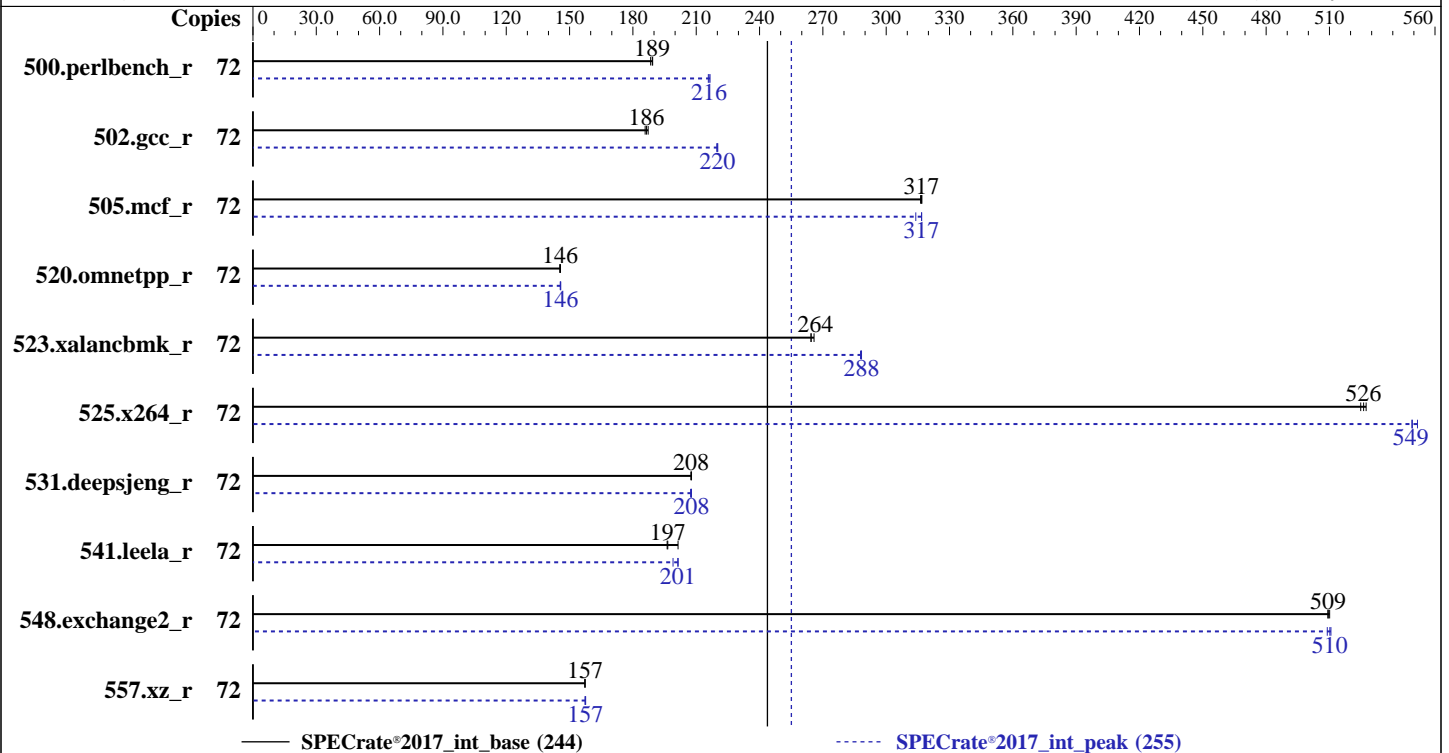

### Hardware

CPU Name: Intel Xeon Gold 6254  
 Max MHz: 4000  
 Nominal: 3100  
 Enabled: 36 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.3.1 released May-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	605	189	608	188	<b>606</b>	<b>189</b>	72	<b>530</b>	<b>216</b>	531	216	529	217
502.gcc_r	72	<b>547</b>	<b>186</b>	549	186	545	187	72	<b>463</b>	<b>220</b>	464	220	463	220
505.mcf_r	72	368	316	367	317	<b>367</b>	<b>317</b>	72	<b>367</b>	<b>317</b>	371	314	367	317
520.omnetpp_r	72	<b>649</b>	<b>146</b>	650	145	648	146	72	649	146	648	146	<b>648</b>	<b>146</b>
523.xalancbmk_r	72	<b>288</b>	<b>264</b>	288	264	286	266	72	264	288	<b>264</b>	<b>288</b>	264	288
525.x264_r	72	<b>240</b>	<b>526</b>	240	525	239	527	72	<b>230</b>	<b>549</b>	230	549	229	552
531.deepsjeng_r	72	398	207	<b>397</b>	<b>208</b>	397	208	72	397	208	<b>397</b>	<b>208</b>	398	207
541.leela_r	72	592	201	608	196	<b>607</b>	<b>197</b>	72	592	201	599	199	<b>592</b>	<b>201</b>
548.exchange2_r	72	<b>370</b>	<b>509</b>	370	509	370	510	72	371	509	369	511	<b>370</b>	<b>510</b>
557.xz_r	72	495	157	<b>494</b>	<b>157</b>	494	157	72	494	157	<b>494</b>	<b>157</b>	493	158

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 255

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## General Notes (Continued)

numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
ADDDC setting disabled  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
DCU Streamer Prefetcher enabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on intel-sut Thu Aug 1 13:48:10 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6254 CPU @ 3.10GHz  
2 "physical id"s (chips)  
72 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 18  
siblings : 36  
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 72

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-71
Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6254 CPU @ 3.10GHz
Stepping: 6
CPU MHz: 3824.761
BogoMIPS: 6200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68
node 0 size: 95145 MB
node 0 free: 94855 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69
node 1 size: 96764 MB
node 1 free: 96531 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70
node 2 size: 96764 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
node 2 free: 96557 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71
node 3 size: 96742 MB
node 3 free: 96366 MB
node distances:
node 0 1 2 3
0: 10 21 11 21
1: 21 10 21 11
2: 11 21 10 21
3: 21 11 21 10
```

```
From /proc/meminfo
MemTotal: 394666392 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 3 Aug 1 13:30

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 31G 386G 8% /
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.3.1 05/02/2019

Memory:

6x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

6x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Compiler Version Notes (Continued)

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -DSPEC_LP64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-fno-strict-overflow
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -fno-alias
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemallocc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 244

PowerEdge M640 (Intel Xeon Gold 6254, 3.10GHz)

SPECrate®2017\_int\_peak = 255

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-01 09:48:10-0400.

Report generated on 2019-10-01 14:17:49 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.