



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

**SPECrate®2017\_fp\_base = 217**

**SPECrate®2017\_fp\_peak = 230**

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

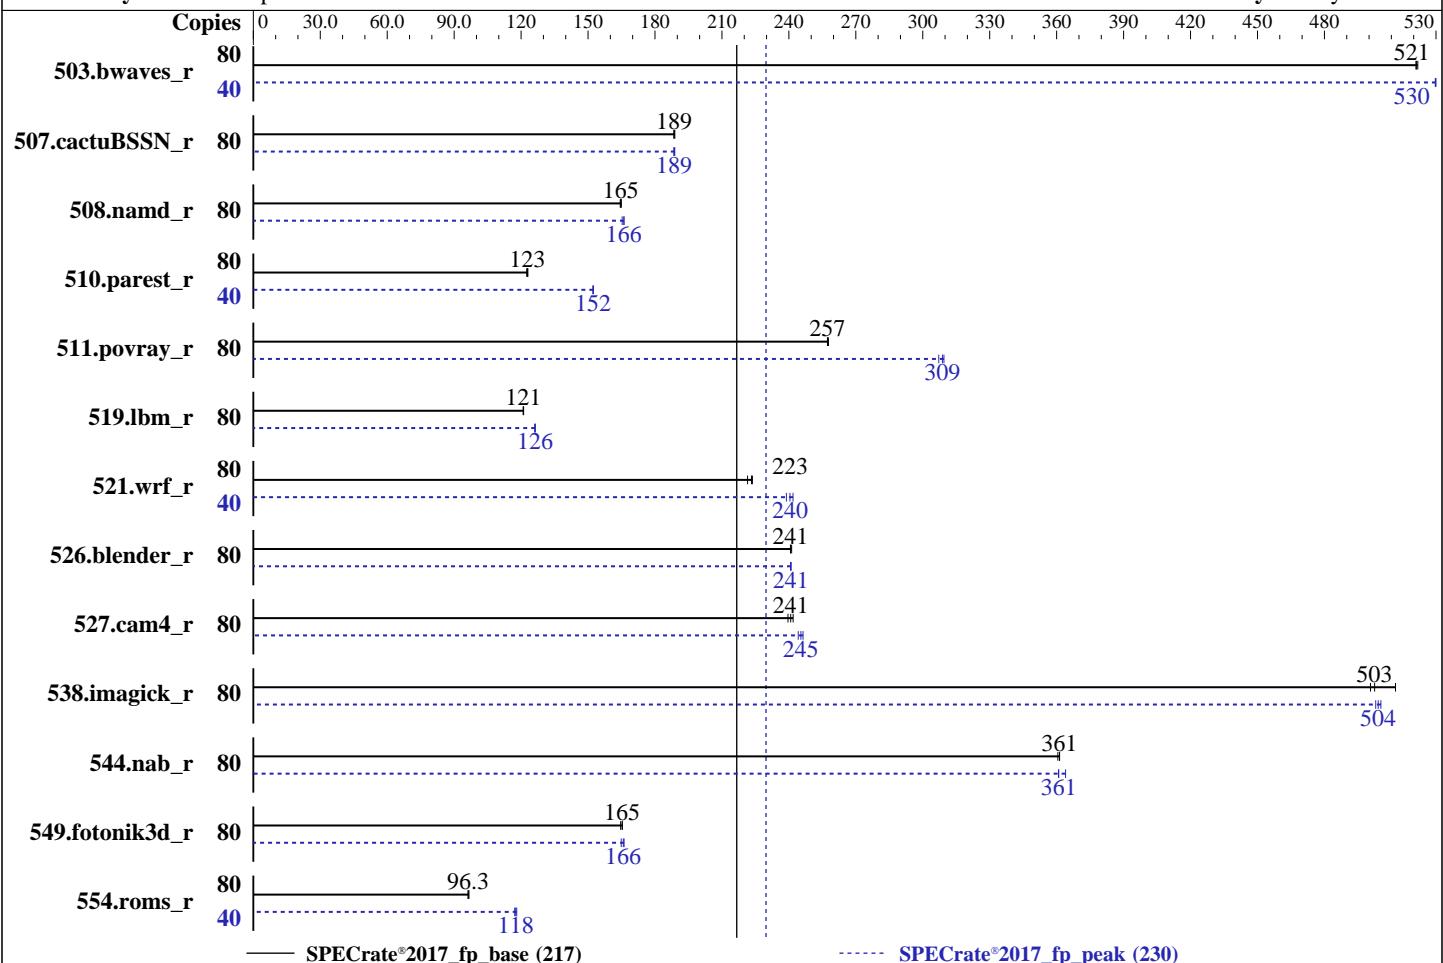

— SPECrate®2017\_fp\_base (217)

····· SPECrate®2017\_fp\_peak (230)

## Hardware

CPU Name: Intel Xeon Gold 6230

Max MHz: 3900

Nominal: 2100

Enabled: 40 cores, 2 chips, 2 threads/core

Orderable: 1,2 chips

Cache L1: 32 KB I + 32 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 27.5 MB I+D on chip per chip

Other: None

Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)

Storage: 1 x 200 GB SATA III SSD

Other: None

OS:

SUSE Linux Enterprise Server 12 SP4 (x86\_64)

Kernel 4.12.14-94.41-default

C/C++: Version 19.0.4.227 of Intel C/C++

Compiler for Linux;

Fortran: Version 19.0.4.227 of Intel Fortran

Compiler for Linux

Parallel:

No

Firmware: Version 3.1 released Apr-2019

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

None

Power Management:

--



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

**SPECrate®2017\_fp\_base = 217**

**SPECrate®2017\_fp\_peak = 230**

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1540	521	<u>1539</u>	<u>521</u>	1537	522	40	757	530	757	530	<u>757</u>	<u>530</u>
507.cactubSSN_r	80	536	189	<u>537</u>	<u>189</u>	537	188	80	536	189	537	188	<u>537</u>	<u>189</u>
508.namd_r	80	462	164	461	165	<u>462</u>	<u>165</u>	80	460	165	<u>458</u>	<u>166</u>	458	166
510.parest_r	80	1701	123	<u>1704</u>	<u>123</u>	1708	123	40	688	152	<u>687</u>	<u>152</u>	687	152
511.povray_r	80	726	257	725	258	<u>726</u>	<u>257</u>	80	605	309	608	307	604	309
519.lbm_r	80	<u>697</u>	<u>121</u>	697	121	696	121	80	<u>668</u>	<u>126</u>	667	126	669	126
521.wrf_r	80	809	221	801	224	<u>803</u>	<u>223</u>	40	375	239	370	242	<u>373</u>	<u>240</u>
526.blender_r	80	<u>506</u>	<u>241</u>	506	241	505	241	80	<u>506</u>	<u>241</u>	506	241	506	241
527.cam4_r	80	584	240	578	242	<u>581</u>	<u>241</u>	80	<u>570</u>	<u>245</u>	573	244	568	246
538.imagick_r	80	389	512	397	501	<u>396</u>	<u>503</u>	80	396	503	394	505	<u>395</u>	<u>504</u>
544.nab_r	80	<u>373</u>	<u>361</u>	373	361	373	361	80	<u>373</u>	<u>361</u>	373	361	<u>370</u>	<u>364</u>
549.fotonik3d_r	80	<u>1886</u>	<u>165</u>	1894	165	1885	165	80	1891	165	1876	166	<u>1880</u>	<u>166</u>
554.roms_r	80	1321	96.3	1315	96.6	<u>1320</u>	<u>96.3</u>	40	543	117	538	118	<u>541</u>	<u>118</u>

**SPECrate®2017\_fp\_base = 217**

**SPECrate®2017\_fp\_peak = 230**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Monitor/Mwait = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance

Hardware P-state = Out of Band Mode

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

SDDC = Disable

ADDDC Sparing = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on 135-178-171 Wed Sep 4 03:04:15 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

**SPECrate®2017\_fp\_base = 217**

**SPECrate®2017\_fp\_peak = 230**

**CPU2017 License:** 001176

**Test Date:** Sep-2019

**Test Sponsor:** Supermicro

**Hardware Availability:** Apr-2019

**Tested by:** Supermicro

**Software Availability:** May-2019

## Platform Notes (Continued)

```

Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2100.000
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 192099 MB
node 0 free: 179087 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 193492 MB
node 1 free: 185255 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193521 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## Platform Notes (Continued)

```
node 2 free: 185260 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193519 MB
node 3 free: 185263 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      791176216 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux 135-178-171 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Sep 3 17:57

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## Platform Notes (Continued)

```
/dev/sda3      xfs   145G   42G  103G  29% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.1 04/29/2019

Memory:

```
24x Micron Technology 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
              | 544.nab_r(base, peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Date: Sep-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: May-2019

## Peak Optimization Flags (Continued)

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029U-TR4 (X11DPU , Intel Xeon Gold 6230)

SPECrate®2017\_fp\_base = 217

SPECrate®2017\_fp\_peak = 230

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-03 15:04:14-0400.

Report generated on 2019-10-01 14:28:38 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.