



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

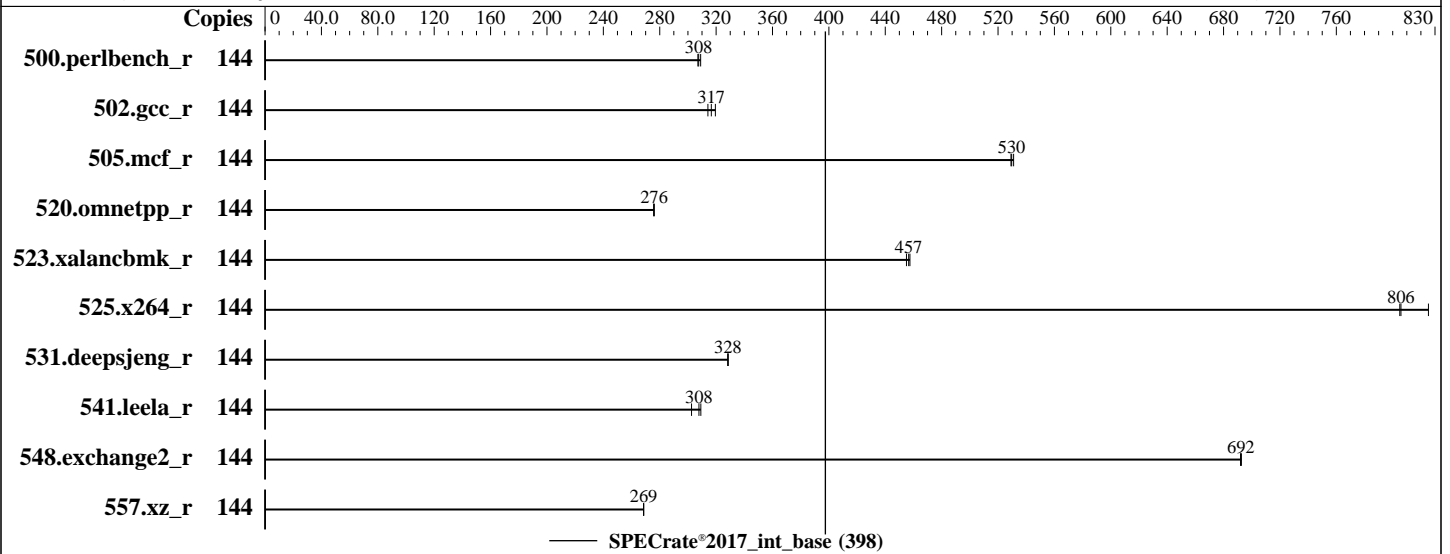

### Hardware

CPU Name: Intel Xeon Gold 5220  
 Max MHz: 3900  
 Nominal: 2200  
 Enabled: 72 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x SATA M.2 SSD, 480 GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS for D3753-C1x Version V5.0.0.14 R1.8.0 released Jun-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Aug-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	747	307	742	309	<b>745</b>	<b>308</b>							
502.gcc_r	144	638	319	<b>644</b>	<b>317</b>	649	314							
505.mcf_r	144	438	531	<b>439</b>	<b>530</b>	440	529							
520.omnetpp_r	144	685	276	<b>684</b>	<b>276</b>	684	276							
523.xalancbmk_r	144	332	458	334	455	<b>333</b>	<b>457</b>							
525.x264_r	144	306	825	313	805	<b>313</b>	<b>806</b>							
531.deepsjeng_r	144	503	328	502	328	<b>503</b>	<b>328</b>							
541.leela_r	144	<b>775</b>	<b>308</b>	771	309	788	303							
548.exchange2_r	144	<b>545</b>	<b>692</b>	545	693	545	692							
557.xz_r	144	579	268	<b>579</b>	<b>269</b>	579	269							

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-143  
Process tuning settings:  
echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Aug-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
DCU Streamer Prefetcher = Disabled  
Fan Control = Full  
Energy Performance = Performance  
HWPM = Native Mode with no legacy  
LLC Prefetcher = Disable  
Override OS Energy Performance = Enable  
Patrol Scrub = Disabled  
WR CRC feature Control = Disabled  
XPT Prefetch = Enable  
Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on SLES15-BMT Thu Aug 1 02:30:19 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz  
4 "physical id"s (chips)  
144 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 18  
siblings : 36  
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 144  
On-line CPU(s) list: 0-143  
Thread(s) per core: 2  
Core(s) per socket: 18

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2200.000
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s): 36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s): 39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s): 54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s): 57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 191883 MB
node 0 free: 184902 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

### Platform Notes (Continued)

```

node 1 size: 193532 MB
node 1 free: 193299 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 193503 MB
node 2 free: 193275 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 193532 MB
node 3 free: 193310 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 193532 MB
node 4 free: 193308 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 193532 MB
node 5 free: 193304 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 193532 MB
node 6 free: 193333 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 193359 MB
node 7 free: 193134 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  31  31  21  21
  1:  11  10  21  21  31  31  21  21
  2:  21  21  10  11  21  21  31  31
  3:  21  21  11  10  21  21  31  31
  4:  31  31  21  21  10  11  21  21
  5:  31  31  21  21  11  10  21  21
  6:  21  21  31  31  21  21  10  11
  7:  21  21  31  31  21  21  11  10

```

From /proc/meminfo

MemTotal: 1583522660 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15"

VERSION\_ID="15"

PRETTY\_NAME="SUSE Linux Enterprise Server 15"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220, 2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```
uname -a:
Linux SLES15-BMT 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

```
run-level 3 Aug 1 02:27
```

```
SPEC is set to: /home/Benchmark/speccpu2017-int
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   343G   30G  314G   9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.8.0 for D3753-C1x
06/06/2019
```

```
Memory:
48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
     | 541.leela_r(base)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5220,  
2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Compiler Version Notes (Continued)

-----  
=====  
Fortran | 548.exchange2\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M5, Intel Xeon Gold 5220,  
2.20GHz

SPECrate®2017\_int\_base = 398

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Aug-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-31 13:30:18-0400.

Report generated on 2019-10-01 14:31:35 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.