



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base =	325
SPECrate®2017_int_energy_base =	1190
SPECrate®2017_int_peak =	355
SPECrate®2017_int_energy_peak =	1310

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

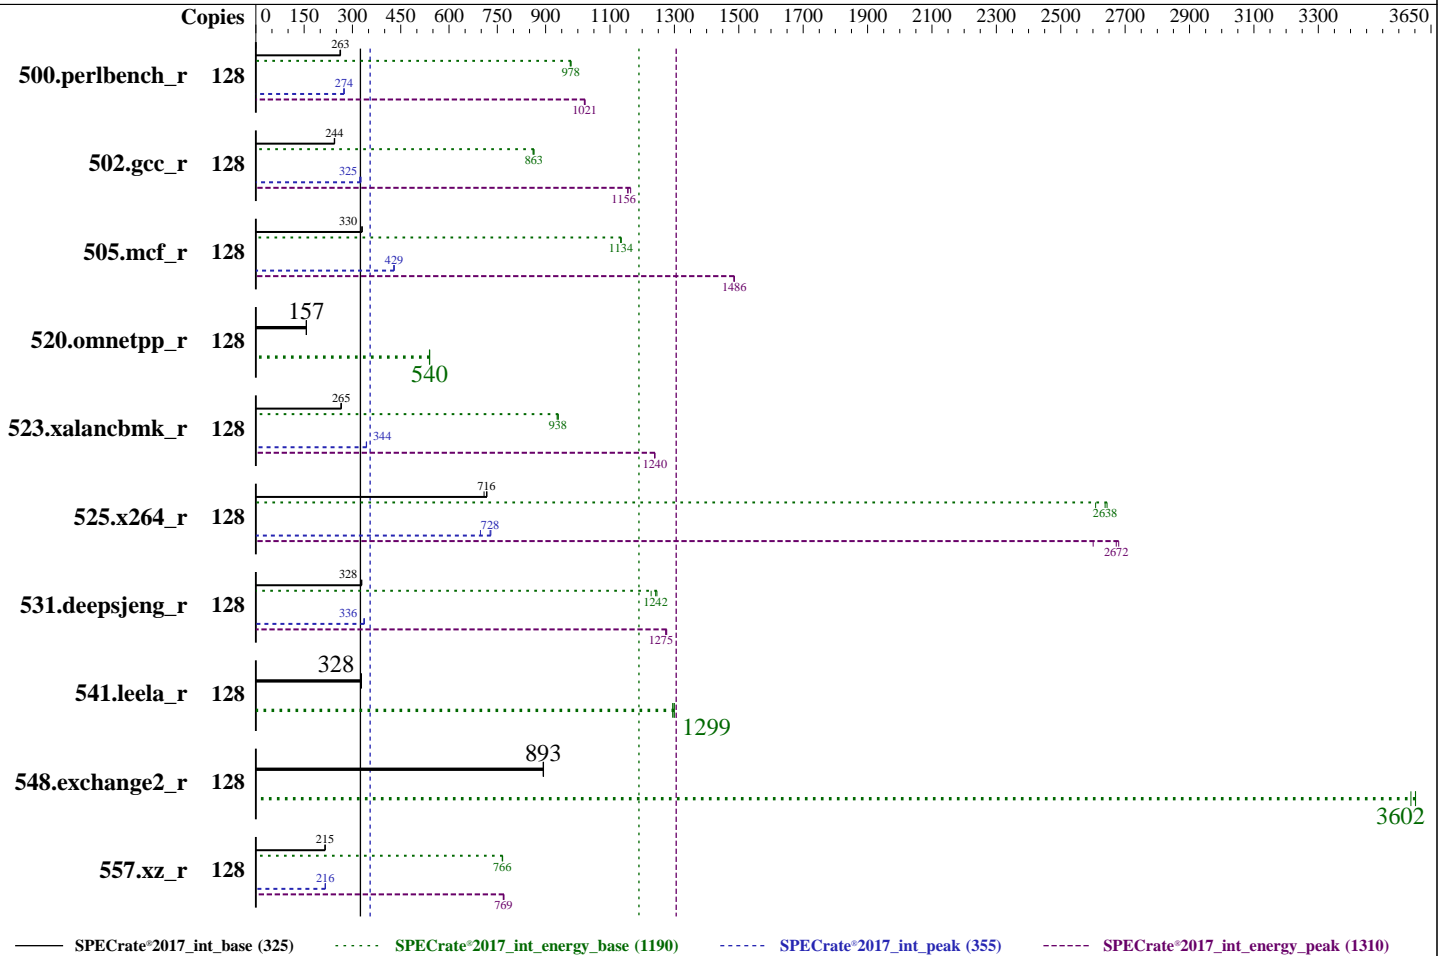

Hardware

CPU Name: AMD EPYC 7702P
 Max MHz: 3350
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version CFE103L released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: Disabled



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Power

Max. Power (W): 322.9
Idle Power (W): 96.79
Min. Temperature (C): 21.50
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 1 wire
Provisioning: Line-powered

Power Settings

Management FW: Version 1.25 of AMBT03I
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)
Details: Lenovo 750W Platinum Hot-SWap Power Supply
Backplane: hot-swap drive bays
Other Storage: None
Storage Model #: MTFDDAK960TTDN
NICs Installed: 1 x 4-port OCP Ethernet Adapter @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: None

Power Analyzer

Power Analyzer: WIN:8888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310
Serial Number: C2RA21002V
Input Connection: Default
Metrology Institute: CNAS
Calibration By: China CEPREI Laboratory
Calibration Label: 1GA18013618-0009
Calibration Date: 29-Oct-2018
PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: Connected to PSU1
Current Ranges Used: 2A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:8889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: COM1
Input Connection: USB
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	128	781	261	226	976	290	310	<u>775</u>	<u>263</u>	<u>226</u>	<u>978</u>	<u>292</u>	<u>310</u>	774	263	226	979	292	311
502.gcc_r	128	741	245	228	864	308	314	<u>741</u>	<u>244</u>	<u>228</u>	<u>863</u>	<u>307</u>	<u>314</u>	744	244	229	861	307	316
505.mcf_r	128	626	330	199	1130	319	323	<u>627</u>	<u>330</u>	<u>200</u>	<u>1130</u>	<u>318</u>	<u>323</u>	629	329	200	1130	318	323
520.omnetpp_r	128	1070	157	337	540	315	317	1071	157	337	539	315	317	<u>1070</u>	<u>157</u>	<u>337</u>	<u>540</u>	<u>315</u>	<u>317</u>
523.xalancbmk_r	128	<u>509</u>	<u>265</u>	<u>156</u>	<u>938</u>	<u>306</u>	<u>315</u>	509	266	156	939	306	315	512	264	156	936	306	316
525.x264_r	128	312	718	91.9	2640	294	306	<u>313</u>	<u>716</u>	<u>92.1</u>	<u>2640</u>	<u>294</u>	<u>305</u>	316	709	93.1	2610	295	305
531.deepsjeng_r	128	<u>447</u>	<u>328</u>	<u>128</u>	<u>1240</u>	<u>287</u>	<u>316</u>	452	325	130	1230	288	314	446	329	128	1250	287	315
541.leela_r	128	646	328	177	1300	273	288	648	327	177	1290	273	288	<u>646</u>	<u>328</u>	<u>177</u>	<u>1300</u>	<u>273</u>	<u>288</u>
548.exchange2_r	128	<u>376</u>	<u>893</u>	<u>101</u>	<u>3600</u>	<u>269</u>	<u>276</u>	376	893	101	3590	270	277	375	894	101	3600	269	276
557.xz_r	128	643	215	196	766	305	309	<u>643</u>	<u>215</u>	<u>196</u>	<u>766</u>	<u>305</u>	<u>310</u>	643	215	196	767	305	309

SPECrate®2017_int_base = 325

SPECrate®2017_int_energy_base = 1190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	128	743	274	216	1020	291	309	743	274	216	1020	291	309	746	273	217	1020	291	309
502.gcc_r	128	559	325	170	1160	305	316	562	323	170	1150	303	316	555	327	169	1160	305	315
505.mcf_r	128	482	429	152	1480	316	321	482	429	152	1490	316	320	482	429	152	1490	316	320
520.omnetpp_r	128	1070	157	337	540	315	317	1071	157	337	539	315	317	1070	157	337	540	315	317
523.xalancbmk_r	128	393	344	118	1240	301	309	394	343	118	1240	300	309	393	344	118	1240	300	308
525.x264_r	128	321	698	93.4	2600	291	300	308	728	90.9	2670	295	306	307	730	90.7	2680	295	306
531.deepsjeng_r	128	437	336	125	1270	287	311	437	336	125	1270	287	315	435	337	125	1280	287	309
541.leela_r	128	646	328	177	1300	273	288	648	327	177	1290	273	288	646	328	177	1300	273	288
548.exchange2_r	128	376	893	101	3600	269	276	376	893	101	3590	270	277	375	894	101	3600	269	276
557.xz_r	128	640	216	195	771	305	309	641	216	195	769	305	309	641	216	196	768	305	309

SPECrate®2017_int_peak = 355

SPECrate®2017_int_energy_peak = 1310

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
 "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_rate_aocc200_rome_C_lib/64;
 /home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_rate_aocc200_rome_C_lib/32:"
MALLOCONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:
cTDP Control set to Manual
cTDP set to 200
Memory Speed set to Auto
NUMA nodes per socket set to NPS4

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-01om Thu Sep 26 06:38:41 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
model name : AMD EPYC 7702P 64-Core Processor
  1 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings  : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
 53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7702P 64-Core Processor
Stepping:               0
CPU MHz:                2000.000
CPU max MHz:            2000.0000
CPU min MHz:            1500.0000
BogoMIPS:               3992.79
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bml avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79
node 0 size: 64304 MB
node 0 free: 63960 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 64499 MB
node 1 free: 64231 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 64499 MB
node 2 free: 64259 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 64455 MB
node 3 free: 64225 MB
node distances:
node  0  1  2  3
 0:  10  12  12  12
 1:  12  10  12  12
 2:  12  12  10  12
 3:  12  12  12  10
```

```
From /proc/meminfo
MemTotal:      263943816 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-0lom 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

```
run-level 3 Sep 26 06:30
```

```
SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 893G 55G 839G 7% /
```

```
From /sys/devices/virtual/dmi/id
BIOS: Lenovo CFE103L 08/19/2019
Vendor: Lenovo
Product: ThinkSystem SR655 -[7Y00000000]-
Product Family: ThinkSystem
Serial: 0123456789
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x Samsung M393A4K40DB2-CWE 32 kB 2 rank 3200
8x Unknown Unknown
```

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

C benchmarks (continued):
-lflang

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502 gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655
2.00 GHz, AMD EPYC 7702P

SPECrate®2017_int_base = 325
SPECrate®2017_int_energy_base = 1190
SPECrate®2017_int_peak = 355
SPECrate®2017_int_energy_peak = 1310

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-D.xml>

PTDaemon, SPEC CPU, and SPECrate are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-09-25 18:38:40-0400.
Report generated on 2019-10-23 17:50:48 by CPU2017 PDF formatter v6255.
Originally published on 2019-10-23.