



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081


Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

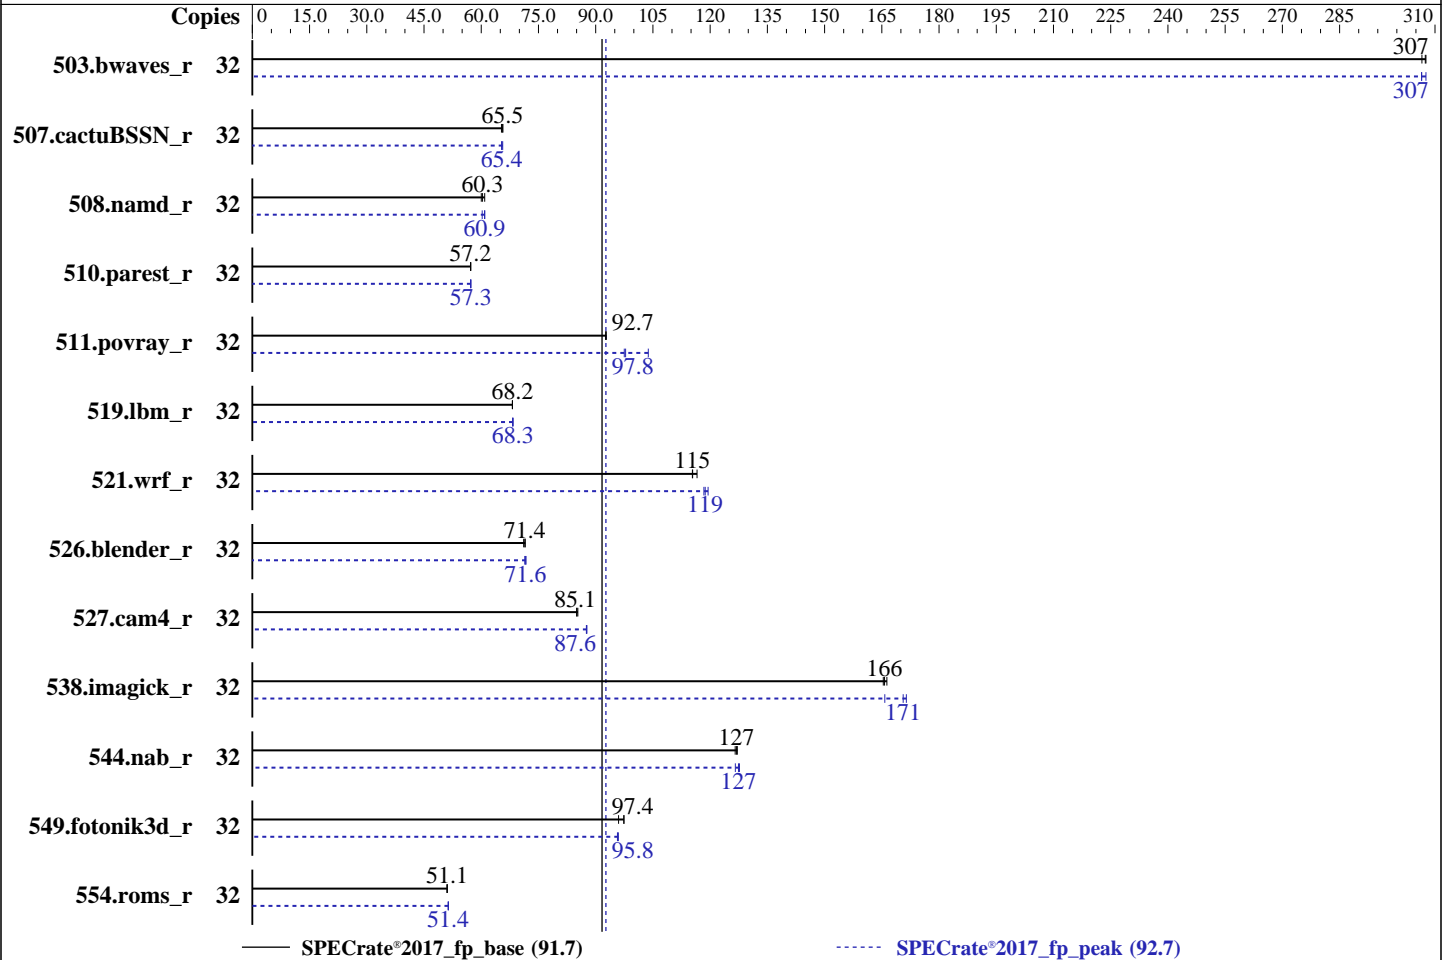

Hardware

CPU Name: Intel Xeon Silver 4208
 Max MHz: 3200
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933V-R, running at 2400)
 Storage: 1 x 960 GB SSD SATA III
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 3.10.0-693.21.1.el7.x86_64
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Version BIOS 3.1 released Apr-2019
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_base = 91.7
SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1044	307	1047	307	1043	308	32	1047	306	1043	308	1047	307
507.cactuBSSN_r	32	617	65.7	620	65.3	618	65.5	32	620	65.3	617	65.6	619	65.4
508.namd_r	32	507	60.0	499	60.9	504	60.3	32	499	60.9	505	60.3	499	60.9
510.parest_r	32	1464	57.2	1463	57.2	1462	57.3	32	1463	57.2	1462	57.3	1461	57.3
511.povray_r	32	806	92.7	806	92.7	806	92.7	32	720	104	766	97.5	764	97.8
519.lbm_r	32	495	68.2	495	68.2	495	68.2	32	494	68.3	494	68.2	494	68.3
521.wrf_r	32	621	115	615	117	621	115	32	600	119	606	118	604	119
526.blender_r	32	682	71.4	681	71.5	685	71.1	32	679	71.7	683	71.4	680	71.6
527.cam4_r	32	658	85.0	658	85.1	656	85.3	32	638	87.7	639	87.6	639	87.6
538.imagick_r	32	481	165	480	166	478	166	32	464	171	480	166	466	171
544.nab_r	32	424	127	426	127	424	127	32	423	127	422	128	425	127
549.fotonik3d_r	32	1280	97.4	1299	96.0	1281	97.4	32	1303	95.7	1300	95.9	1301	95.8
554.roms_r	32	995	51.1	996	51.1	996	51.1	32	990	51.3	989	51.4	990	51.4

SPECrate®2017_fp_base = **91.7**

SPECrate®2017_fp_peak = **92.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017.1.5/lib/ia32:/cpu2017.1.5/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

General Notes (Continued)

Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`

Platform Notes

BIOS Settings:
 Power Technology = Custom
 Turbo Mode = Enable
 Enhanced Halt State (C1E) = Disable
 CPU C6 report = Disabled
 Package C State = No limit
 Software Controlled T-States = Disable
 Hyper-Threading (All) = Enable
 Enforce POR = Disable
 Memory Frequency = 2400
 Patrol Scrub = Disabled
 IMC Interleaving = Auto
 SNC = Disabled

Sysinfo program /cpu2017.1.5/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on SUT Tue Oct 8 04:20:16 2019

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 8
 siblings : 16
 physical 0: cores 0 1 2 3 4 5 6 7
 physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               32
On-line CPU(s) list: 0-31
Thread(s) per core:  2
Core(s) per socket:  8
Socket(s):            2
NUMA node(s):        2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
Stepping:             7
CPU MHz:              2100.000
BogoMIPS:             4200.00
Virtualization:      VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             11264K
NUMA node0 CPU(s):   0-7,16-23
NUMA node1 CPU(s):   8-15,24-31
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 195230 MB
node 0 free: 174823 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 196608 MB
node 1 free: 179725 MB
node distances:
node  0  1
0:  10  21

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Platform Notes (Continued)

1: 21 10

From /proc/meminfo

MemTotal: 394638492 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux"

redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:

Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Oct 4 15:37

SPEC is set to: /cpu2017.1.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda1	ext4	825G	124G	660G	16%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.1 04/30/2019

Memory:

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
        | 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_base = 91.7
SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Compiler Version Notes (Continued)

64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Peak Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Date: Oct-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-08-06.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevC-Oct-2019-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-08-06.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevC-Oct-2019-For-Supermicro-Platform.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate®2017_fp_base = 91.7

eterio 224 RE1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017_fp_peak = 92.7

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-07 22:20:15-0400.

Report generated on 2019-11-12 14:56:37 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.