



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML30 Gen10

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: May-2019

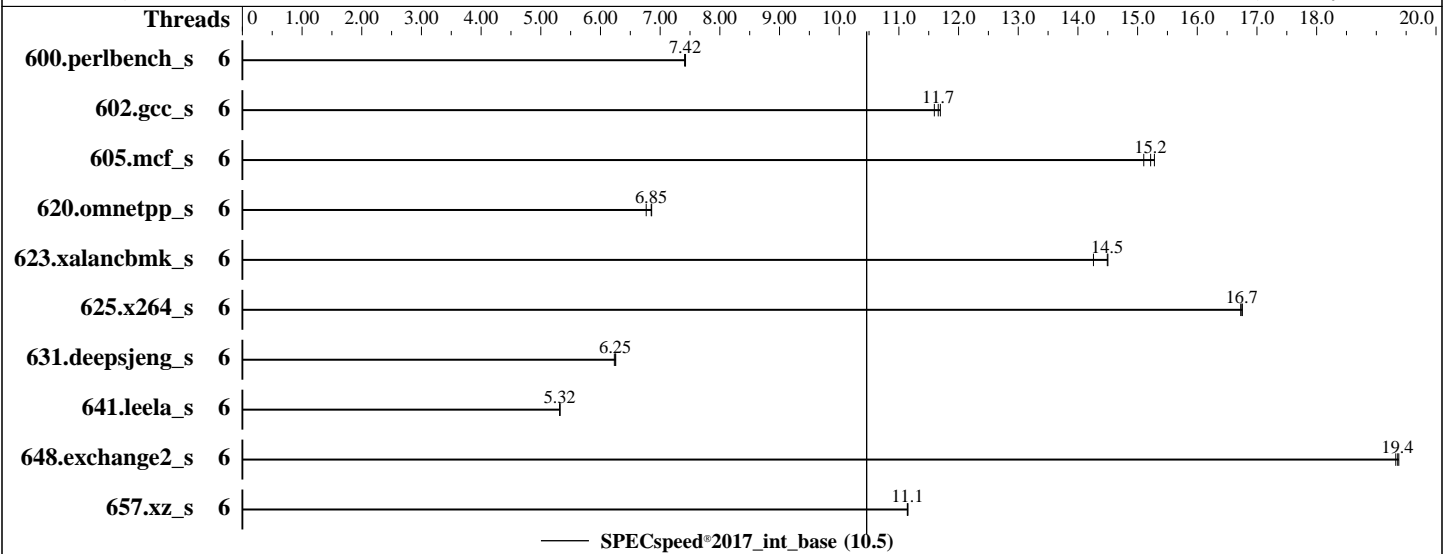

### Hardware

CPU Name: Intel Xeon E-2226G  
 Max MHz: 4700  
 Nominal: 3400  
 Enabled: 6 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-U)  
 Storage: 1 x 400 GB SAS SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Kernel 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version U44 09/05/2019 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** May-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	6	<b><u>239</u></b>	<b><u>7.42</u></b>	240	7.41	239	7.43									
602.gcc_s	6	340	11.7	343	11.6	<b><u>342</u></b>	<b><u>11.7</u></b>									
605.mcf_s	6	313	15.1	309	15.3	<b><u>310</u></b>	<b><u>15.2</u></b>									
620.omnetpp_s	6	<b><u>238</u></b>	<b><u>6.85</u></b>	238	6.86	241	6.77									
623.xalancbmk_s	6	99.4	14.3	97.7	14.5	<b><u>97.8</u></b>	<b><u>14.5</u></b>									
625.x264_s	6	<b><u>105</u></b>	<b><u>16.7</u></b>	105	16.7	105	16.8									
631.deepsjeng_s	6	229	6.26	<b><u>229</u></b>	<b><u>6.25</u></b>	230	6.23									
641.leela_s	6	<b><u>321</u></b>	<b><u>5.32</u></b>	321	5.32	321	5.32									
648.exchange2_s	6	152	19.3	<b><u>152</u></b>	<b><u>19.4</u></b>	152	19.4									
657.xz_s	6	<b><u>555</u></b>	<b><u>11.1</u></b>	555	11.1	554	11.2									

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017\_u4/lib/intel64:/home/cpu2017\_u4/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** May-2019

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

Workload Profile set to General Peak Frequency Compute

Sysinfo program /home/cpu2017\_u4/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on ml30-sles15 Thu Oct 10 18:40:16 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz

1 "physical id"s (chips)

6 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 6

On-line CPU(s) list: 0-5

Thread(s) per core: 1

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz

Stepping: 10

CPU MHz: 3400.000

BogoMIPS: 6816.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 12288K

NUMA node0 CPU(s): 0-5

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** May-2019

## Platform Notes (Continued)

```
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec
xgetbv1 xsaves ibpb ibrs stibp dtherm ida arat pln pts ssbd
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 64265 MB
node 0 free: 63781 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65808100 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux ml30-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): No status reported
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Mitigation: PTI
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** May-2019

## Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass): Vulnerable  
 CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Oct 10 18:38

SPEC is set to: /home/cpu2017\_u4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xf	344G	73G	272G	21%	/home

From /sys/devices/virtual/dmi/id

BIOS: HPE U44 09/05/2019

Vendor: HPE

Product: ProLiant ML30 Gen10

Product Family: ProLiant

Serial: CN68130POX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2667

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
      | 625.x264_s(base) 657.xz_s(base)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      | 641.leela_s(base)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** May-2019

## Compiler Version Notes (Continued)

=====  
Fortran | 648.exchange2\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML30 Gen10**

(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-10 09:10:15-0400.

Report generated on 2020-06-08 13:31:01 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.