SPEC CPU®2017 Integer Rate Result

Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Celeron G4900)

SPECrate®2017_int_base = 8.55

SPECrate®2017_int_peak = 9.17

CPU2017 License:	001176	**Test Date:**	Oct-2019
Test Sponsor:	Supermicro	**Hardware Availability:**	Nov-2018
Tested by:	Supermicro	**Software Availability:**	Sep-2018

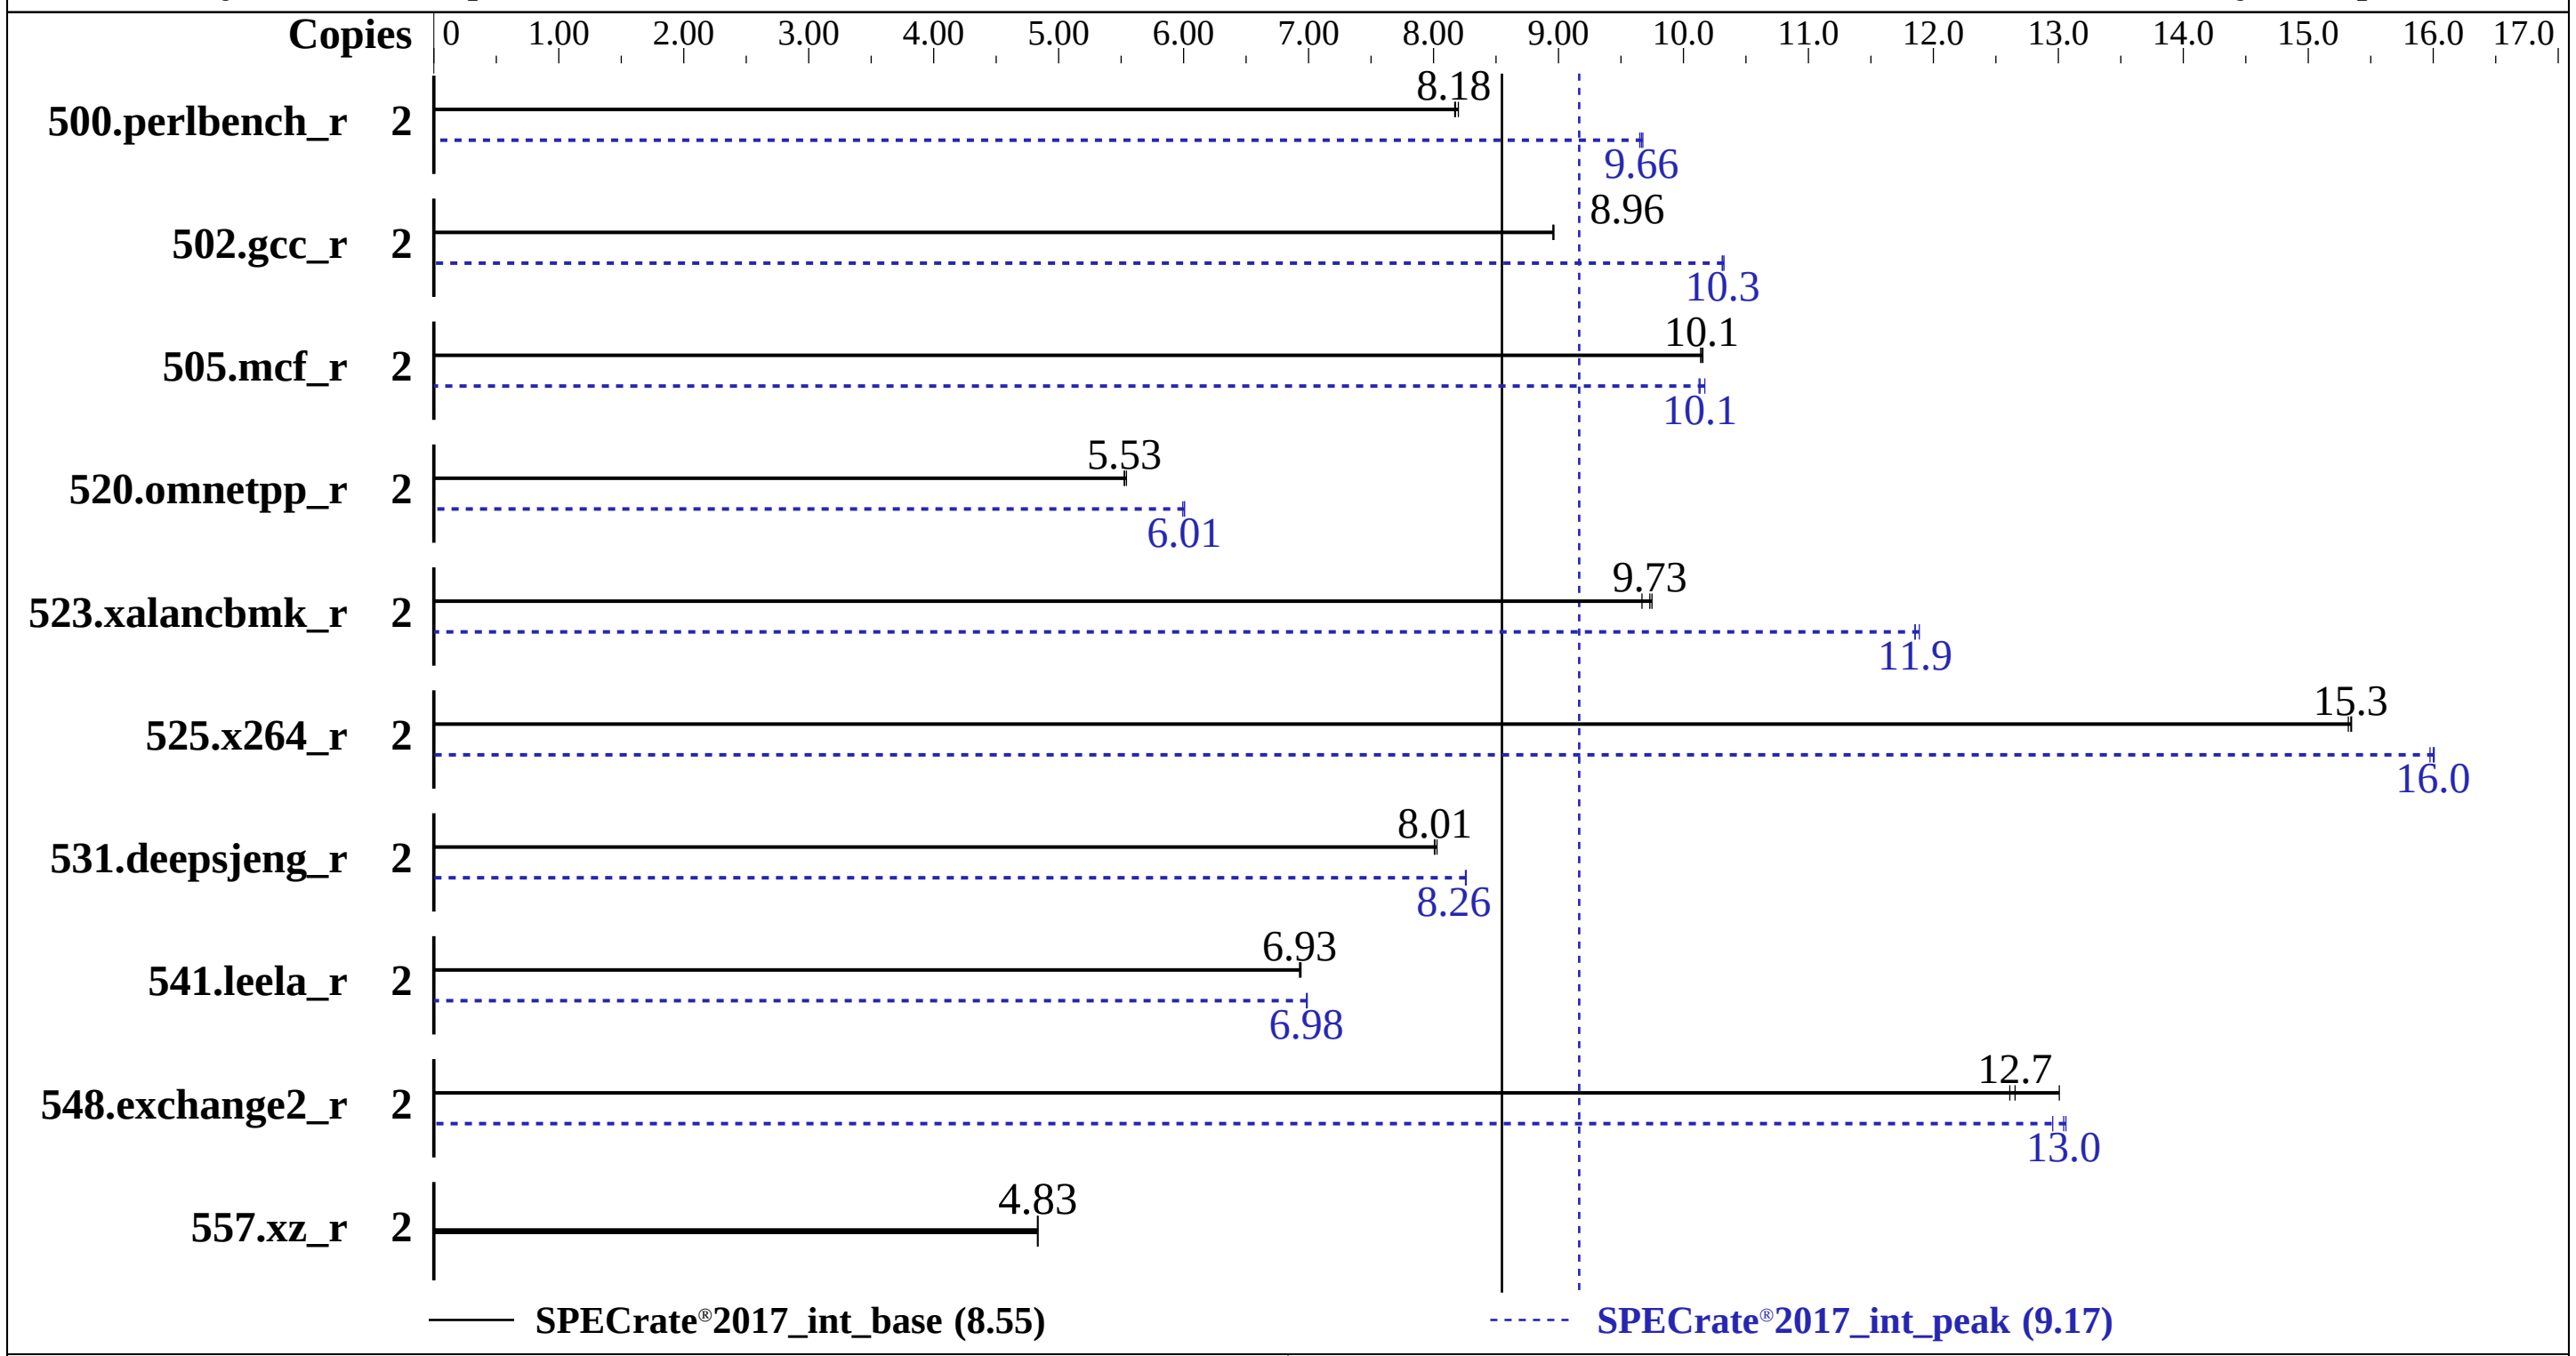

Hardware

CPU Name:	Intel Celeron G4900
Max MHz:	3100
Nominal:	3100
Enabled:	2 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	2 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)
Storage:	1 x 200 GB SATA III SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) Kernel 4.4.114-94.11-default
Compiler:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 1.0b released May-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	--

Supermicro
SuperServer 5019C-WR (X11SCW-F , Intel Celeron G4900)

SPECrate®2017_int_base = 8.55

SPECrate®2017_int_peak = 9.17

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro
Test Date: Oct-2019
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	2	390	8.17	**389**	**8.18**	388	8.20	2	**329**	**9.66**	330	9.65	329	9.68
502.gcc_r	2	**316**	**8.96**	316	8.96	316	8.96	2	274	10.3	**275**	**10.3**	275	10.3
505.mcf_r	2	319	10.1	**319**	**10.1**	318	10.2	2	**319**	**10.1**	318	10.2	319	10.1
520.omnetpp_r	2	473	5.54	475	5.53	**475**	**5.53**	2	**437**	**6.01**	438	5.99	437	6.01
523.xalancbmk_r	2	**217**	**9.73**	218	9.67	217	9.75	2	178	11.9	178	11.9	**178**	**11.9**
525.x264_r	2	**228**	**15.3**	229	15.3	228	15.3	2	219	16.0	219	16.0	**219**	**16.0**
531.deepsjeng_r	2	286	8.03	286	8.01	**286**	**8.01**	2	**278**	**8.26**	277	8.26	278	8.26
541.leela_r	2	478	6.93	**478**	**6.93**	477	6.94	2	474	6.99	474	6.98	**474**	**6.98**
548.exchange2_r	2	**414**	**12.7**	403	13.0	415	12.6	2	**402**	**13.0**	401	13.1	404	13.0
557.xz_r	2	447	4.83	**447**	**4.83**	447	4.83	2	447	4.83	**447**	**4.83**	447	4.83

SPECrate®2017_int_base = 8.55

SPECrate®2017_int_peak = 9.17

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>   /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation

(Continued on next page)

General Notes (Continued)

```
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-65nv Tue Oct 29 17:53:10 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Celeron(R) G4900 CPU @ 3.10GHz
      1  "physical id"s (chips)
      2 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 2
      siblings  : 2
      physical 0: cores 0 1

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                2
     On-line CPU(s) list:   0,1
     Thread(s) per core:    1
     Core(s) per socket:    2
     Socket(s):             1
     NUMA node(s):          1
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 158
     Model name:            Intel(R) Celeron(R) G4900 CPU @ 3.10GHz
     Stepping:              11
     CPU MHz:               3099.999
     CPU max MHz:           3100.0000
     CPU min MHz:           800.0000
     BogoMIPS:              6191.98
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              256K
```

(Continued on next page)

Platform Notes (Continued)

```
      L3 cache:               2048K
      NUMA node0 CPU(s):      0,1
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
      xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
      lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts dtherm hwp hwp_notify
      hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
      clflushopt xsaveopt xsavec xgetbv1

 /proc/cpuinfo cache data
    cache size : 2048 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1
   node 0 size: 64334 MB
   node 0 free: 63880 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       65878308 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux linux-65nv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
 CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

 run-level 3 Oct 29 17:52

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   145G   14G  131G  10% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 1.0b 05/16/2019
   Memory:
    4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2667, configured at 2400

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C        | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
         | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc`

502.gcc_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

505.mcf_r: `-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

525.x264_r: `-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

523.xalancbmk_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

531.deepsjeng_r: `Same as 520.omnetpp_r`

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:
`-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html
http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml
http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-29 05:53:09-0400.
Report generated on 2019-11-26 12:55:16 by CPU2017 PS formatter v6255.
Originally published on 2019-11-26.