



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55


Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

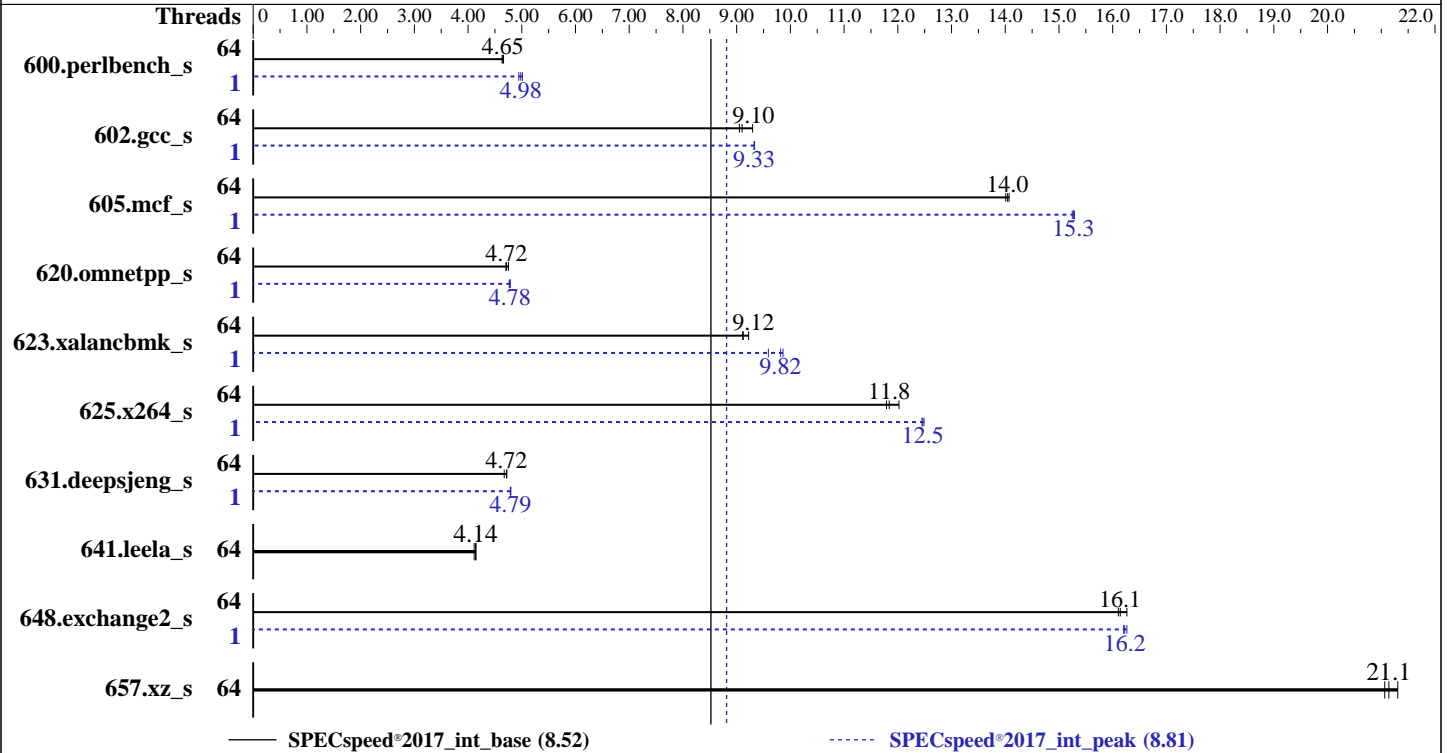

Hardware

CPU Name: AMD EPYC 7532
 Max MHz: 3300
 Nominal: 2400
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 2 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 800 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.6 released Nov-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	383	4.63	381	4.66	<u>382</u>	<u>4.65</u>	1	359	4.94	354	5.01	<u>356</u>	<u>4.98</u>
602.gcc_s	64	428	9.30	<u>437</u>	<u>9.10</u>	440	9.05	1	<u>427</u>	<u>9.33</u>	427	9.33	427	9.33
605.mcf_s	64	337	14.0	<u>336</u>	<u>14.0</u>	335	14.1	1	<u>309</u>	<u>15.3</u>	310	15.2	309	15.3
620.omnetpp_s	64	343	4.75	347	4.70	<u>346</u>	<u>4.72</u>	1	342	4.77	<u>341</u>	<u>4.78</u>	341	4.79
623.xalancbmk_s	64	154	9.22	<u>155</u>	<u>9.12</u>	156	9.11	1	<u>144</u>	<u>9.82</u>	144	9.86	148	9.59
625.x264_s	64	147	12.0	<u>149</u>	<u>11.8</u>	150	11.8	1	142	12.4	141	12.5	<u>142</u>	<u>12.5</u>
631.deepsjeng_s	64	<u>304</u>	<u>4.72</u>	307	4.67	304	4.72	1	<u>299</u>	<u>4.79</u>	299	4.80	299	4.79
641.leela_s	64	415	4.11	<u>412</u>	<u>4.14</u>	411	4.15	64	415	4.11	<u>412</u>	<u>4.14</u>	411	4.15
648.exchange2_s	64	181	16.3	<u>182</u>	<u>16.1</u>	183	16.1	1	181	16.3	<u>181</u>	<u>16.2</u>	181	16.2
657.xz_s	64	290	21.3	<u>292</u>	<u>21.1</u>	293	21.1	64	290	21.3	<u>292</u>	<u>21.1</u>	293	21.1

SPECspeed®2017_int_base = **8.52**

SPECspeed®2017_int_peak = **8.81**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-127"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/mnt/ramdisk
/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled
Memory Interleaving set to Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Tue Dec 3 08:31:49 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7532 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
48 49 52 53 56 57 60 61
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
48 49 52 53 56 57 60 61
```

From lscpu:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          32
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7532 32-Core Processor
Stepping:               0
CPU MHz:                2395.376
BogoMIPS:               4790.75
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0,1,64,65
NUMA node1 CPU(s):     2,3,66,67
NUMA node2 CPU(s):     4,5,68,69
NUMA node3 CPU(s):     6,7,70,71
NUMA node4 CPU(s):     8,9,72,73
NUMA node5 CPU(s):     10,11,74,75
NUMA node6 CPU(s):     12,13,76,77
NUMA node7 CPU(s):     14,15,78,79
NUMA node8 CPU(s):     16,17,80,81
NUMA node9 CPU(s):     18,19,82,83
NUMA node10 CPU(s):    20,21,84,85
NUMA node11 CPU(s):    22,23,86,87
NUMA node12 CPU(s):    24,25,88,89
NUMA node13 CPU(s):    26,27,90,91
NUMA node14 CPU(s):    28,29,92,93
NUMA node15 CPU(s):    30,31,94,95
NUMA node16 CPU(s):    32,33,96,97
NUMA node17 CPU(s):    34,35,98,99
NUMA node18 CPU(s):    36,37,100,101
NUMA node19 CPU(s):    38,39,102,103
NUMA node20 CPU(s):    40,41,104,105
NUMA node21 CPU(s):    42,43,106,107
NUMA node22 CPU(s):    44,45,108,109
NUMA node23 CPU(s):    46,47,110,111
NUMA node24 CPU(s):    48,49,112,113

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node25 CPU(s): 50,51,114,115
NUMA node26 CPU(s): 52,53,116,117
NUMA node27 CPU(s): 54,55,118,119
NUMA node28 CPU(s): 56,57,120,121
NUMA node29 CPU(s): 58,59,122,123
NUMA node30 CPU(s): 60,61,124,125
NUMA node31 CPU(s): 62,63,126,127

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bml avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 32 nodes (0-31)
node 0 cpus: 0 1 64 65
node 0 size: 15676 MB
node 0 free: 15625 MB
node 1 cpus: 2 3 66 67
node 1 size: 16127 MB
node 1 free: 16095 MB
node 2 cpus: 4 5 68 69
node 2 size: 16127 MB
node 2 free: 16076 MB
node 3 cpus: 6 7 70 71
node 3 size: 16126 MB
node 3 free: 16095 MB
node 4 cpus: 8 9 72 73
node 4 size: 16127 MB
node 4 free: 16082 MB
node 5 cpus: 10 11 74 75
node 5 size: 16127 MB
node 5 free: 16092 MB
node 6 cpus: 12 13 76 77
node 6 size: 16127 MB
node 6 free: 16092 MB
node 7 cpus: 14 15 78 79

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 7 size: 16126 MB
node 7 free: 16089 MB
node 8 cpus: 16 17 80 81
node 8 size: 16127 MB
node 8 free: 16106 MB
node 9 cpus: 18 19 82 83
node 9 size: 16097 MB
node 9 free: 16076 MB
node 10 cpus: 20 21 84 85
node 10 size: 16127 MB
node 10 free: 16106 MB
node 11 cpus: 22 23 86 87
node 11 size: 16126 MB
node 11 free: 16104 MB
node 12 cpus: 24 25 88 89
node 12 size: 16127 MB
node 12 free: 15956 MB
node 13 cpus: 26 27 90 91
node 13 size: 16127 MB
node 13 free: 16046 MB
node 14 cpus: 28 29 92 93
node 14 size: 16127 MB
node 14 free: 16077 MB
node 15 cpus: 30 31 94 95
node 15 size: 16114 MB
node 15 free: 11863 MB
node 16 cpus: 32 33 96 97
node 16 size: 16127 MB
node 16 free: 16102 MB
node 17 cpus: 34 35 98 99
node 17 size: 16127 MB
node 17 free: 16101 MB
node 18 cpus: 36 37 100 101
node 18 size: 16127 MB
node 18 free: 16107 MB
node 19 cpus: 38 39 102 103
node 19 size: 16126 MB
node 19 free: 16104 MB
node 20 cpus: 40 41 104 105
node 20 size: 16127 MB
node 20 free: 16105 MB
node 21 cpus: 42 43 106 107
node 21 size: 16127 MB
node 21 free: 16106 MB
node 22 cpus: 44 45 108 109
node 22 size: 16127 MB
node 22 free: 16107 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 23 cpus: 46 47 110 111
node 23 size: 16126 MB
node 23 free: 16105 MB
node 24 cpus: 48 49 112 113
node 24 size: 16127 MB
node 24 free: 16101 MB
node 25 cpus: 50 51 114 115
node 25 size: 16127 MB
node 25 free: 16106 MB
node 26 cpus: 52 53 116 117
node 26 size: 16127 MB
node 26 free: 16106 MB
node 27 cpus: 54 55 118 119
node 27 size: 16126 MB
node 27 free: 16105 MB
node 28 cpus: 56 57 120 121
node 28 size: 16127 MB
node 28 free: 16106 MB
node 29 cpus: 58 59 122 123
node 29 size: 16127 MB
node 29 free: 16107 MB
node 30 cpus: 60 61 124 125
node 30 size: 16127 MB
node 30 free: 16107 MB
node 31 cpus: 62 63 126 127
node 31 size: 16124 MB
node 31 free: 16103 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32			
9:	12	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
10:	12	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
11:	12	12	12	12	12	12	12	12	12	11	11	11	10	12	12	12	12	32	32	32	32	
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
12:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
13:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
14:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
15:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	11	10
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
16:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	10	11	11	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
17:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	10	11	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
18:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	10	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
19:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	10
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
20:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
21:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
22:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
27:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
28:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	10	11	11	11	11	11	11	11	11	11	11	12	12	12	12
29:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	11	10	11	11	11	11	11	11	11	11	12	12	12	12
30:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	11	11	10	11	11	11	11	11	11	11	12	12	12	12
31:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	11	11	11	10	11	11	11	11	11	11	11	12	12	12	12

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 527939392 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Dec 2 07:57 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	140G	4.0G	137G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 1.2.6 11/21/2019
Vendor: Dell Inc.
Product: PowerEdge R7525
Product Family: PowerEdge
Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
1x 802C80B3802C 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200
2x 802C8632802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
1x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
9x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
16x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++   | 623.xalancbmk_s(peak)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

=====
C++ | 623.xalancbmk_s(peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
Fortran | 648.exchange2_s(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

```
602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc
```

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

605.mcf_s (continued):

```
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7532, 2.40 GHz)

SPECspeed®2017_int_peak = 8.81

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk_s: -Wno-return-type

```
-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-03 09:31:48-0500.

Report generated on 2019-12-26 11:31:52 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.