



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55


Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

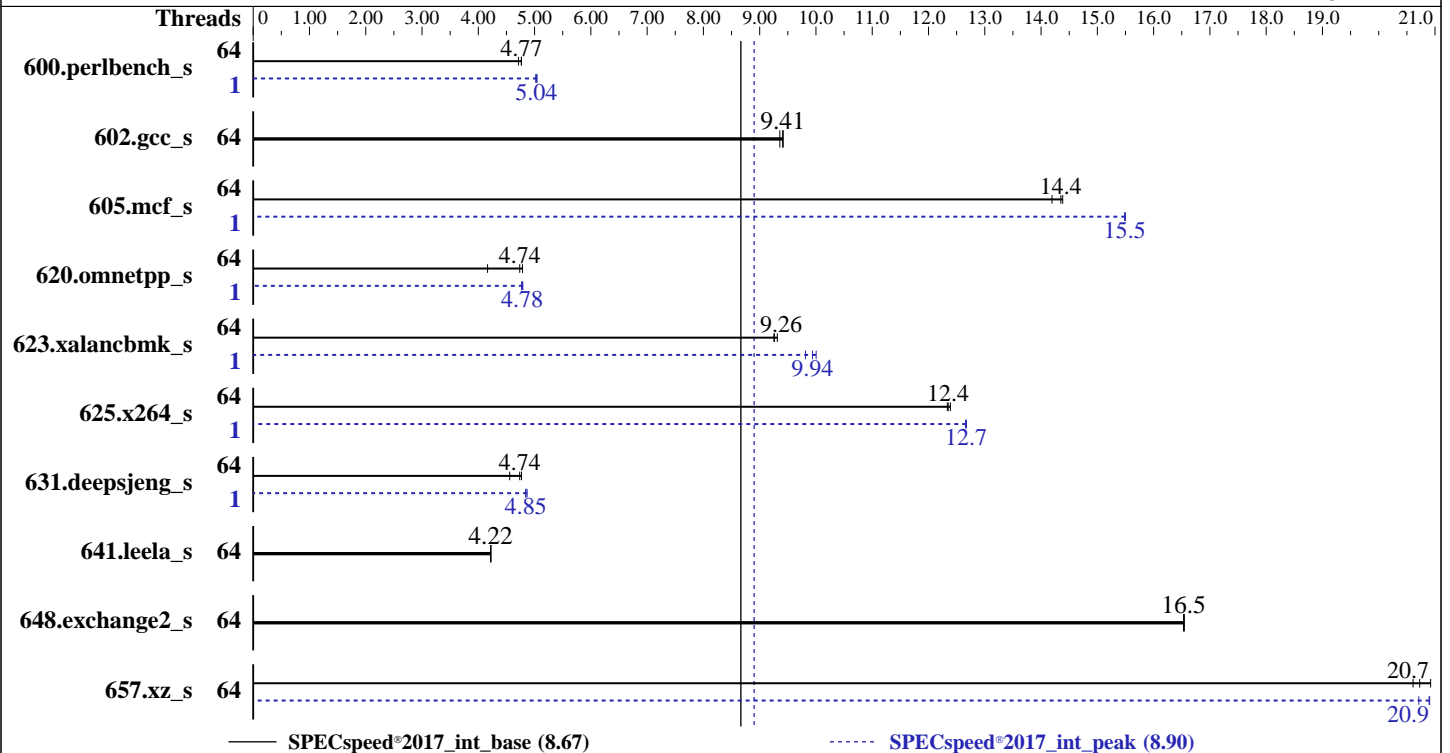

### Hardware

CPU Name: AMD EPYC 7452  
 Max MHz: 3350  
 Nominal: 2350  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 2 x 960 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.2.6 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECSpeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	372	4.77	<b>372</b>	<b>4.77</b>	377	4.71	1	<b>352</b>	<b>5.04</b>	352	5.04	354	5.02
602.gcc_s	64	<b>423</b>	<b>9.41</b>	423	9.42	425	9.36	64	<b>423</b>	<b>9.41</b>	423	9.42	425	9.36
605.mcf_s	64	328	14.4	333	14.2	<b>329</b>	<b>14.4</b>	1	305	15.5	305	15.5	<b>305</b>	<b>15.5</b>
620.omnetpp_s	64	341	4.79	392	4.16	<b>344</b>	<b>4.74</b>	1	342	4.77	<b>341</b>	<b>4.78</b>	340	4.79
623.xalancbmk_s	64	153	9.25	<b>153</b>	<b>9.26</b>	152	9.31	1	144	9.81	<b>143</b>	<b>9.94</b>	142	10.0
625.x264_s	64	143	12.3	<b>143</b>	<b>12.4</b>	142	12.4	1	139	12.7	139	12.7	<b>139</b>	<b>12.7</b>
631.deepsjeng_s	64	314	4.56	301	4.77	<b>303</b>	<b>4.74</b>	1	<b>296</b>	<b>4.85</b>	294	4.87	296	4.84
641.leela_s	64	404	4.22	<b>404</b>	<b>4.22</b>	404	4.22	64	404	4.22	<b>404</b>	<b>4.22</b>	404	4.22
648.exchange2_s	64	<b>178</b>	<b>16.5</b>	178	16.5	178	16.5	64	<b>178</b>	<b>16.5</b>	178	16.5	178	16.5
657.xz_s	64	300	20.6	<b>298</b>	<b>20.7</b>	295	20.9	64	<b>296</b>	<b>20.9</b>	298	20.7	296	20.9

SPECSpeed®2017\_int\_base = **8.67**

SPECSpeed®2017\_int\_peak = **8.90**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-127"

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/64;/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "128"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## General Notes (Continued)

jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS settings:

- NUMA Nodes Per Socket set to 4
- CCX as NUMA Domain set to Enabled
- System Profile set to Custom
- CPU Power Management set to Maximum Performance
- Memory Frequency set to Maximum Performance
- Turbo Boost Enabled
- Cstates set to Enabled
- Memory Patrol Scrub Disabled
- Memory Refresh Rate set to 1x
- PCI ASPM L1 Link Power Management Disabled
- Determinism Slider set to Power Determinism
- Efficiency Optimized Mode Disabled
- Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-g3ob Thu Nov 28 10:13:07 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : AMD EPYC 7452 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

```

From lscpu:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

Address sizes:      43 bits physical, 48 bits virtual
CPU(s):            128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s):         2
NUMA node(s):     16
Vendor ID:         AuthenticAMD
CPU family:        23
Model:             49
Model name:        AMD EPYC 7452 32-Core Processor
Stepping:          0
CPU MHz:           2345.626
BogoMIPS:          4691.25
Virtualization:    AMD-V
L1d cache:         32K
L1i cache:         32K
L2 cache:          512K
L3 cache:          16384K
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 31804 MB
node 0 free: 31640 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 32253 MB
node 1 free: 32112 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 32254 MB
node 2 free: 32113 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 32253 MB
node 3 free: 32121 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 32254 MB
node 4 free: 32122 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 32253 MB
node 5 free: 32117 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 32254 MB
node 6 free: 32088 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 32241 MB
node 7 free: 32104 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 32254 MB
node 8 free: 32089 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 32253 MB
node 9 free: 31962 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 32254 MB
node 10 free: 32083 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 32253 MB
node 11 free: 32113 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 32224 MB
node 12 free: 32021 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 32253 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 13 free: 32122 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 32254 MB
node 14 free: 32119 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 32252 MB
node 15 free: 32123 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 11 11 12 12 12 12 32 32 32 32 32 32 32 32
2:  11 11 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  11 11 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 11 11 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 11 11 32 32 32 32 32 32 32 32
6:  12 12 12 12 11 11 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 11 11 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 11 11 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 11 11 12 12 12 12
10: 32 32 32 32 32 32 32 32 11 11 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 11
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 11
14: 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 11 11 11 10

```

```

From /proc/meminfo
MemTotal:          527946176 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault): Not affected  
 Microarchitectural Data Sampling: Not affected  
 CVE-2017-5754 (Meltdown): Not affected  
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
 CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: conditional, RSB filling

run-level 3 Nov 27 17:44 last=5

SPEC is set to: /root/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	440G	46G	395G	11%	/

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 1.2.6 11/21/2019

Vendor: Dell Inc.

Product: PowerEdge R7525

Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

16x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

=====  
C++ | 623.xalancbmk\_s(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 623.xalancbmk\_s(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math

-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50

-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist

-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp

-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000

-flv-function-specialization -z muldefs -DSPEC\_OPENMP -fopenmp

-DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

`-ljemalloc -lflang`

C++ benchmarks:

`-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang`

Fortran benchmarks:

`-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang`

## Base Other Flags

C benchmarks:

`-Wno-return-type`

C++ benchmarks:

`-Wno-return-type`

Fortran benchmarks:

`-Wno-return-type`

## Peak Compiler Invocation

C benchmarks:

`clang`

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

602.gcc_s: basepeak = yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk\_s: -Wno-return-type

-L/spppo/dev/cpu2017/v110/amd\_speed\_aocc200\_rome\_C\_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.67

PowerEdge R7525 (AMD EPYC 7452, 2.35 GHz)

SPECspeed®2017\_int\_peak = 8.90

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2019

**Hardware Availability:** Feb-2020

**Software Availability:** Aug-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-28 11:13:06-0500.

Report generated on 2019-12-26 11:33:18 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.