



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55


Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

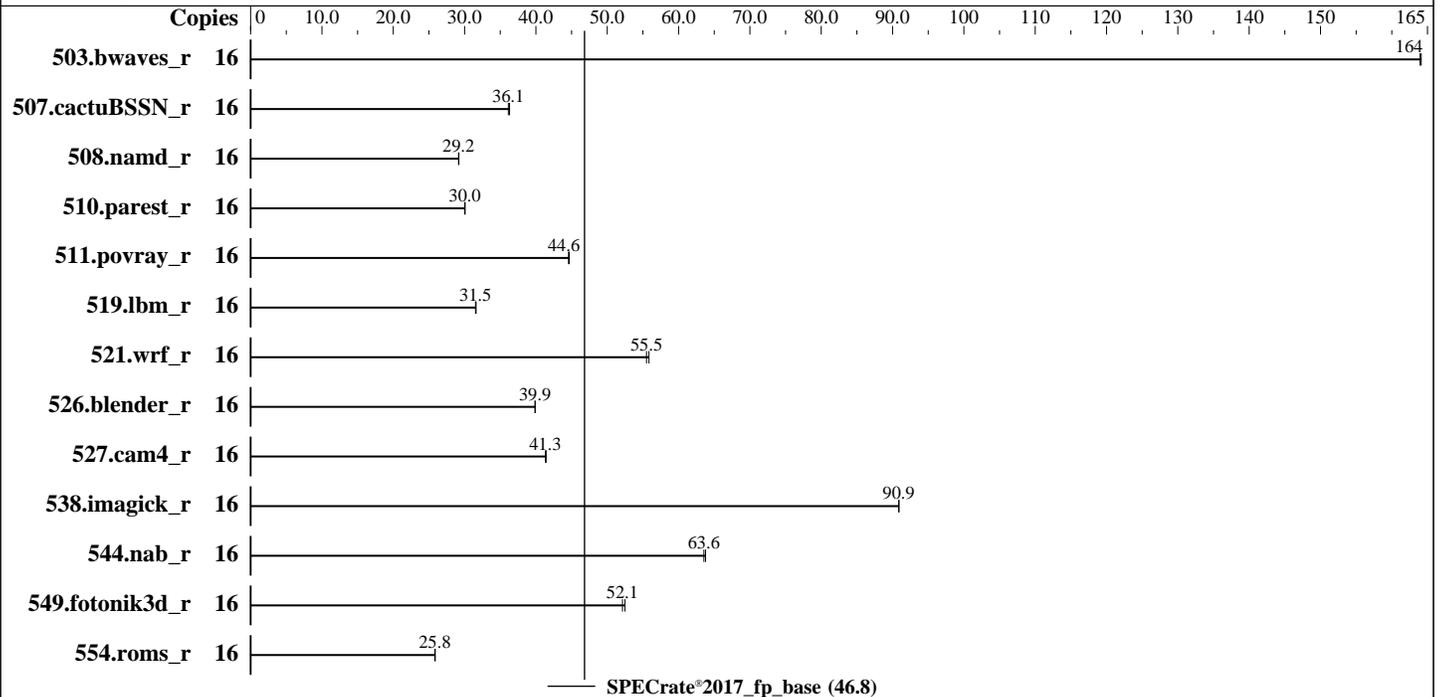

### Hardware

CPU Name: Intel Xeon Silver 4208  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 16 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx8 PC4-2933V-R, running at 2933)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Suse Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.4.8 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2020  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	978	164	<b><u>979</u></b>	<b><u>164</u></b>									
507.cactuBSSN_r	16	558	36.3	<b><u>561</u></b>	<b><u>36.1</u></b>									
508.namd_r	16	521	29.2	<b><u>521</u></b>	<b><u>29.2</u></b>									
510.parest_r	16	<b><u>1394</u></b>	<b><u>30.0</u></b>	1392	30.1									
511.povray_r	16	836	44.7	<b><u>838</u></b>	<b><u>44.6</u></b>									
519.lbm_r	16	<b><u>535</u></b>	<b><u>31.5</u></b>	533	31.6									
521.wrf_r	16	<b><u>646</u></b>	<b><u>55.5</u></b>	642	55.8									
526.blender_r	16	<b><u>611</u></b>	<b><u>39.9</u></b>	611	39.9									
527.cam4_r	16	675	41.4	<b><u>677</u></b>	<b><u>41.3</u></b>									
538.imagick_r	16	<b><u>438</u></b>	<b><u>90.9</u></b>	438	90.9									
544.nab_r	16	<b><u>424</u></b>	<b><u>63.6</u></b>	422	63.8									
549.fotonik3d_r	16	<b><u>1196</u></b>	<b><u>52.1</u></b>	1188	52.5									
554.roms_r	16	982	25.9	<b><u>984</u></b>	<b><u>25.8</u></b>									

SPECrate®2017\_fp\_base = 46.8

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

CPU Interconnect Bus Link Power Management enabled

PCI ASPM L1 Link Power Management enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-g3ob Wed Jan 29 09:30:55 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
```

```
1 "physical id"s (chips)
```

```
16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
```

```
siblings : 16
```

```
physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture: x86_64
```

```
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

## Platform Notes (Continued)

```

Byte Order:                Little Endian
Address sizes:             46 bits physical, 48 bits virtual
CPU(s):                   16
On-line CPU(s) list:      0-15
Thread(s) per core:       2
Core(s) per socket:      8
Socket(s):                 1
NUMA node(s):             1
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                    85
Model name:               Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
Stepping:                 6
CPU MHz:                  2100.000
BogoMIPS:                 4200.00
Virtualization:           VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 11264K
NUMA node0 CPU(s):       0-15
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 191885 MB
node 0 free: 190049 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 196490532 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP1"

VERSION\_ID="15.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jan 29 05:59 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	440G	46G	395G	11%	/

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.4.8 11/27/2019

Vendor: Dell Inc.

Product: PowerEdge T440

Product Family: PowerEdge

Serial: FBLH613

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2020  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

10x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4

### C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4

### Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
 -align array32byte

### Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
 -align array32byte

### Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4

### Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
 -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
 -align array32byte



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 46.8

PowerEdge T440 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 55

**Test Date:** Jan-2020

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2019

**Tested by:** Dell Inc.

**Software Availability:** Jun-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-29 10:30:55-0500.

Report generated on 2020-03-02 11:51:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-29.