



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Nov-2019

Software Availability: Aug-2019

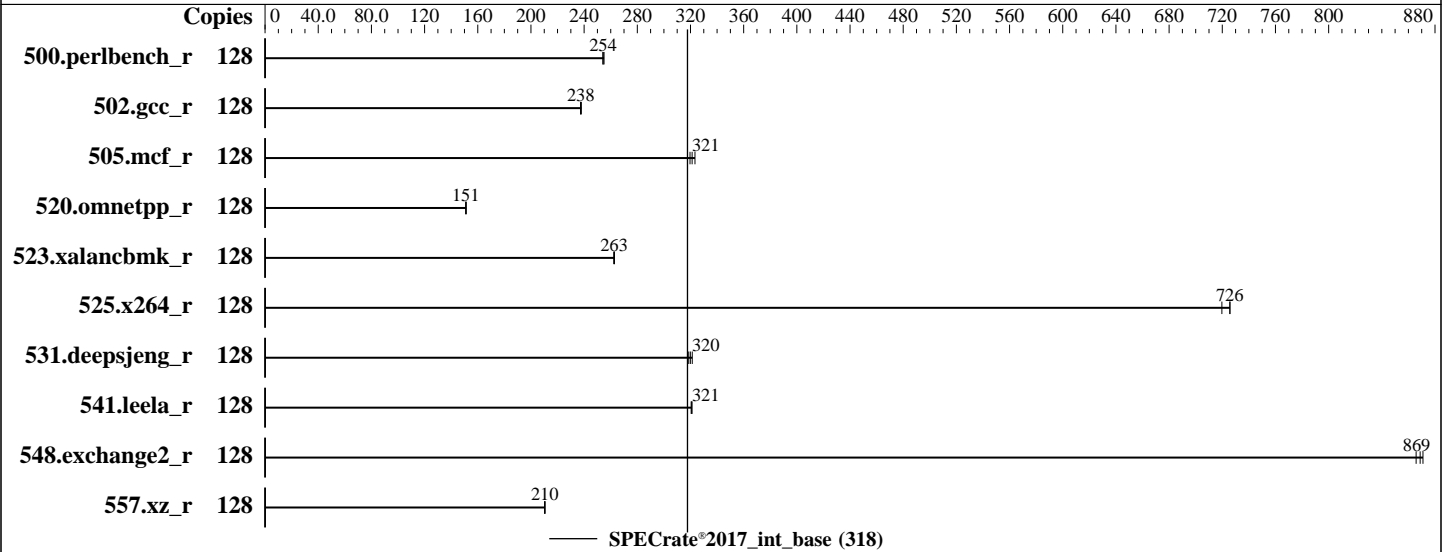

### Hardware

CPU Name: AMD EPYC 7702P  
 Max MHz: 3350  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-L)  
 Storage: 1 x SATA HDD, 2TB, 7.2K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64) kernel version 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Fujitsu BIOS Version R07. Released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2020  
Hardware Availability: Nov-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>801</b>	<b>254</b>	799	255	802	254							
502.gcc_r	128	762	238	<b>763</b>	<b>238</b>	764	237							
505.mcf_r	128	<b>644</b>	<b>321</b>	647	320	640	323							
520.omnetpp_r	128	1112	151	<b>1112</b>	<b>151</b>	1110	151							
523.xalancbmk_r	128	514	263	515	262	<b>515</b>	<b>263</b>							
525.x264_r	128	309	726	311	720	<b>309</b>	<b>726</b>							
531.deepsjeng_r	128	457	321	<b>459</b>	<b>320</b>	460	319							
541.leela_r	128	660	321	661	320	<b>660</b>	<b>321</b>							
548.exchange2_r	128	385	871	387	866	<b>386</b>	<b>869</b>							
557.xz_r	128	<b>657</b>	<b>210</b>	658	210	656	211							

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/Benchmark/speccpu2017/amd\_rate\_aocc200\_rome\_C\_lib/64:/home/Benchmark/speccpu2017/amd\_rate\_aocc200\_rome\_C\_lib/32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fltto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS configuration:  
cTDP = 200  
Determinism Slider = Power  
Global C-state Control = Disabled  
L1 Stream HW Prefetcher = Disabled  
NUMA nodes per socket = NPS4  
Package Power Limit = 200  
SMT Control = Auto  
SVM Mode = Disabled

Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-56yp Thu Jan 16 16:07:08 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHZ

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

From /proc/cpuinfo

```
model name : AMD EPYC 7702P 64-Core Processor
 1 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7702P 64-Core Processor
Stepping: 0
CPU MHz: 2000.000
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3999.83
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb  
cat\_l3 cdp\_l3 hw\_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep  
bmi2 cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves  
cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr arat npt  
lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79
node 0 size: 64244 MB
node 0 free: 63909 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 64499 MB
node 1 free: 64142 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 64499 MB
node 2 free: 64256 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 64268 MB
node 3 free: 63956 MB
node distances:
node 0 1 2 3
0: 10 12 12 12
1: 12 10 12 12
2: 12 12 10 12
3: 12 12 12 10
```

```
From /proc/meminfo
MemTotal: 263690668 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-56yp 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

```
run-level 3 Feb 14 23:21
```

```
SPEC is set to: /home/Benchmark/speccpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   1.6T   15G  1.6T   1% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS: GIGABYTE R07 08/30/2019
Vendor: GIGABYTE
Product: R152-Z31-FJ
Product Family: Server
Serial: GJI7P5821A0005
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200
8x Unknown Unknown
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jan-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Aug-2019

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7702P,  
2.00 GHz

SPECrate®2017\_int\_base = 318

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jan-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Aug-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevB.html>

<http://www.spec.org/cpu2017/flags/aocc200-flags-C2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevB.xml>

<http://www.spec.org/cpu2017/flags/aocc200-flags-C2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-16 02:07:08-0500.

Report generated on 2020-02-18 18:05:27 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-18.