



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55


Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

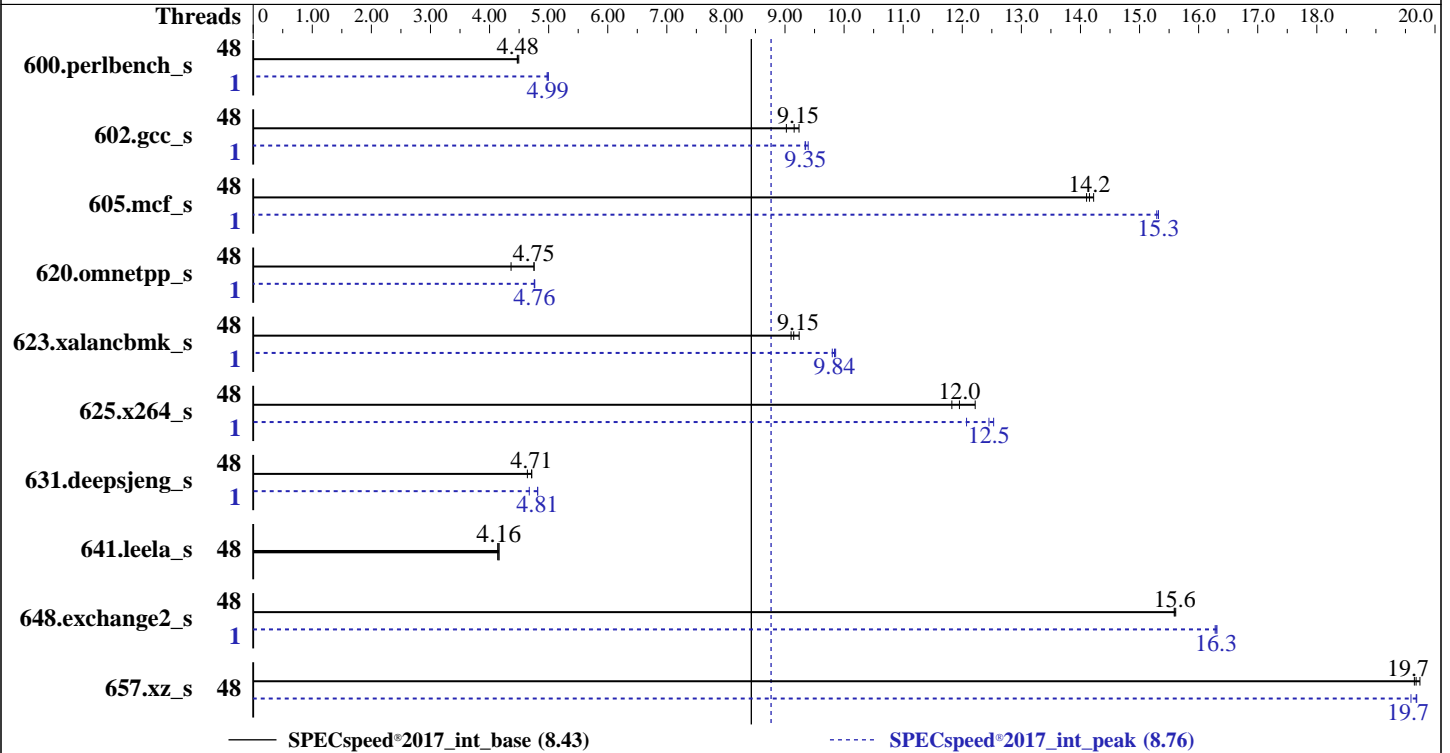

## Hardware

CPU Name: AMD EPYC 7552  
 Max MHz: 3300  
 Nominal: 2200  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 192 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.3.0 released Jan-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECSpeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	397	4.47	395	4.49	<b>396</b>	<b>4.48</b>	1	<b>356</b>	<b>4.99</b>	355	4.99	357	4.97
602.gcc_s	48	441	9.02	<b>435</b>	<b>9.15</b>	431	9.24	1	424	9.39	426	9.34	<b>426</b>	<b>9.35</b>
605.mcf_s	48	<b>334</b>	<b>14.2</b>	335	14.1	332	14.2	1	309	15.3	308	15.3	<b>308</b>	<b>15.3</b>
620.omnetpp_s	48	343	4.75	<b>343</b>	<b>4.75</b>	374	4.36	1	<b>343</b>	<b>4.76</b>	342	4.76	343	4.76
623.xalancbmk_s	48	<b>155</b>	<b>9.15</b>	153	9.24	156	9.10	1	<b>144</b>	<b>9.84</b>	145	9.80	144	9.86
625.x264_s	48	144	12.2	149	11.8	<b>148</b>	<b>12.0</b>	1	146	12.1	141	12.5	<b>142</b>	<b>12.5</b>
631.deepsjeng_s	48	309	4.64	304	4.71	<b>304</b>	<b>4.71</b>	1	298	4.81	<b>298</b>	<b>4.81</b>	307	4.67
641.leela_s	48	<b>410</b>	<b>4.16</b>	412	4.14	410	4.16	48	<b>410</b>	<b>4.16</b>	412	4.14	410	4.16
648.exchange2_s	48	189	15.6	<b>189</b>	<b>15.6</b>	188	15.6	1	180	16.3	181	16.3	<b>180</b>	<b>16.3</b>
657.xz_s	48	315	19.7	<b>314</b>	<b>19.7</b>	313	19.7	48	314	19.7	<b>314</b>	<b>19.7</b>	316	19.6

SPECSpeed®2017\_int\_base = **8.43**

SPECSpeed®2017\_int\_peak = **8.76**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-95"

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/64;/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-47"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 2  
CCX as NUMA Domain set to Enabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost Enabled  
Cstates set to Enabled  
Memory Patrol Scrub Disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management Disabled  
Determinism Slider set to Power Determinism  
Efficiency Optimized Mode Disabled  
Memory Interleaving set to Disabled  
Memory Freq set to 3200  
Fan Speed = Maximum

sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-g3ob Fri Jan 24 04:59:17 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7552 48-Core Processor
  1 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 48
  siblings  : 96
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2020  
Hardware Availability: Apr-2020  
Software Availability: Aug-2019

## Platform Notes (Continued)

25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             1
NUMA node(s):          12
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7552 48-Core Processor
Stepping:              0
CPU MHz:               2195.691
BogoMIPS:              4391.38
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-3,48-51
NUMA node1 CPU(s):    4-7,52-55
NUMA node2 CPU(s):    8-11,56-59
NUMA node3 CPU(s):    12-15,60-63
NUMA node4 CPU(s):    16-19,64-67
NUMA node5 CPU(s):    20-23,68-71
NUMA node6 CPU(s):    24-27,72-75
NUMA node7 CPU(s):    28-31,76-79
NUMA node8 CPU(s):    32-35,80-83
NUMA node9 CPU(s):    36-39,84-87
NUMA node10 CPU(s):   40-43,88-91
NUMA node11 CPU(s):   44-47,92-95
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif umip  
rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 12 nodes (0-11)
node 0 cpus: 0 1 2 3 48 49 50 51
node 0 size: 20923 MB
node 0 free: 20677 MB
node 1 cpus: 4 5 6 7 52 53 54 55
node 1 size: 21472 MB
node 1 free: 21343 MB
node 2 cpus: 8 9 10 11 56 57 58 59
node 2 size: 21502 MB
node 2 free: 21402 MB
node 3 cpus: 12 13 14 15 60 61 62 63
node 3 size: 21501 MB
node 3 free: 21376 MB
node 4 cpus: 16 17 18 19 64 65 66 67
node 4 size: 21501 MB
node 4 free: 21369 MB
node 5 cpus: 20 21 22 23 68 69 70 71
node 5 size: 21503 MB
node 5 free: 21406 MB
node 6 cpus: 24 25 26 27 72 73 74 75
node 6 size: 21501 MB
node 6 free: 21396 MB
node 7 cpus: 28 29 30 31 76 77 78 79
node 7 size: 21501 MB
node 7 free: 21409 MB
node 8 cpus: 32 33 34 35 80 81 82 83
node 8 size: 21503 MB
node 8 free: 21408 MB
node 9 cpus: 36 37 38 39 84 85 86 87
node 9 size: 21501 MB
node 9 free: 21319 MB
node 10 cpus: 40 41 42 43 88 89 90 91
node 10 size: 21501 MB
node 10 free: 21409 MB
node 11 cpus: 44 45 46 47 92 93 94 95
node 11 size: 21489 MB
node 11 free: 21398 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

0:	10	11	11	11	11	11	12	12	12	12	12	12
1:	11	10	11	11	11	11	12	12	12	12	12	12
2:	11	11	10	11	11	11	12	12	12	12	12	12
3:	11	11	11	10	11	11	12	12	12	12	12	12
4:	11	11	11	11	10	11	12	12	12	12	12	12
5:	11	11	11	11	11	10	12	12	12	12	12	12
6:	12	12	12	12	12	12	10	11	11	11	11	11
7:	12	12	12	12	12	12	11	10	11	11	11	11
8:	12	12	12	12	12	12	11	11	10	11	11	11
9:	12	12	12	12	12	12	11	11	11	10	11	11
10:	12	12	12	12	12	12	11	11	11	11	10	11
11:	12	12	12	12	12	12	11	11	11	11	11	10

From /proc/meminfo

```
MemTotal:      263581788 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

run-level 3 Jan 23 08:17 last=5

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

SPEC is set to: /root/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	440G	36G	405G	9%	/

```

From /sys/devices/virtual/dmi/id
BIOS: Dell Inc. 1.3.0 01/14/2020
Vendor: Dell Inc.
Product: PowerEdge R7515
Product Family: PowerEdge
Serial: 5MGPH13

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
8x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
8x Not Specified Not Specified

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++   | 623.xalanbmk_s(peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++   | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base)
-----

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====  
C++ | 623.xalancbmk\_s(peak)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====  
Fortran | 648.exchange2\_s(base, peak)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

```

C++ benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lflang

Fortran benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC\_OPENMP -fopenmp -fopenmp=libomp  
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Portability Flags (Continued)

```

602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -fgnu89-inline -fopenmp=libomp -lomp -lpthread

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

-ldl -ljemalloc

605.mcf\_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -mno-sse4a -fstruct-layout=5

-mllvm -vectorize-memory-aggressively

-mllvm -function-specialize -mllvm -enable-gvn-hoist

-mllvm -unroll-threshold=50 -fremap-arrays

-mllvm -vector-library=LIBMVEC

-mllvm -reduce-array-computations=3

-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000

-flv-function-specialization -DSPEC\_OPENMP -fopenmp

-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl

-ljemalloc -lflang

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -mno-sse4a -fstruct-layout=5

-mllvm -vectorize-memory-aggressively

-mllvm -function-specialize -mllvm -enable-gvn-hoist

-mllvm -unroll-threshold=50 -fremap-arrays

-mllvm -vector-library=LIBMVEC

-mllvm -reduce-array-computations=3

-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000

-flv-function-specialization -DSPEC\_OPENMP -fopenmp

-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm

-ljemalloc -lflang

C++ benchmarks:

620.omnetpp\_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -flv-function-specialization

-mllvm -unroll-threshold=100

-mllvm -enable-partial-unswitch

-mllvm -loop-unswitch-threshold=200000

-mllvm -vector-library=LIBMVEC

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

620.omnetpp\_s (continued):

```
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

623.xalancbmk\_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk\_s: -Wno-return-type

```
-L/spo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge R7515 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_int\_peak = 8.76

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Other Flags (Continued)

Fortran benchmarks:  
-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-24 05:59:16-0500.

Report generated on 2020-04-14 15:18:35 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.