



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

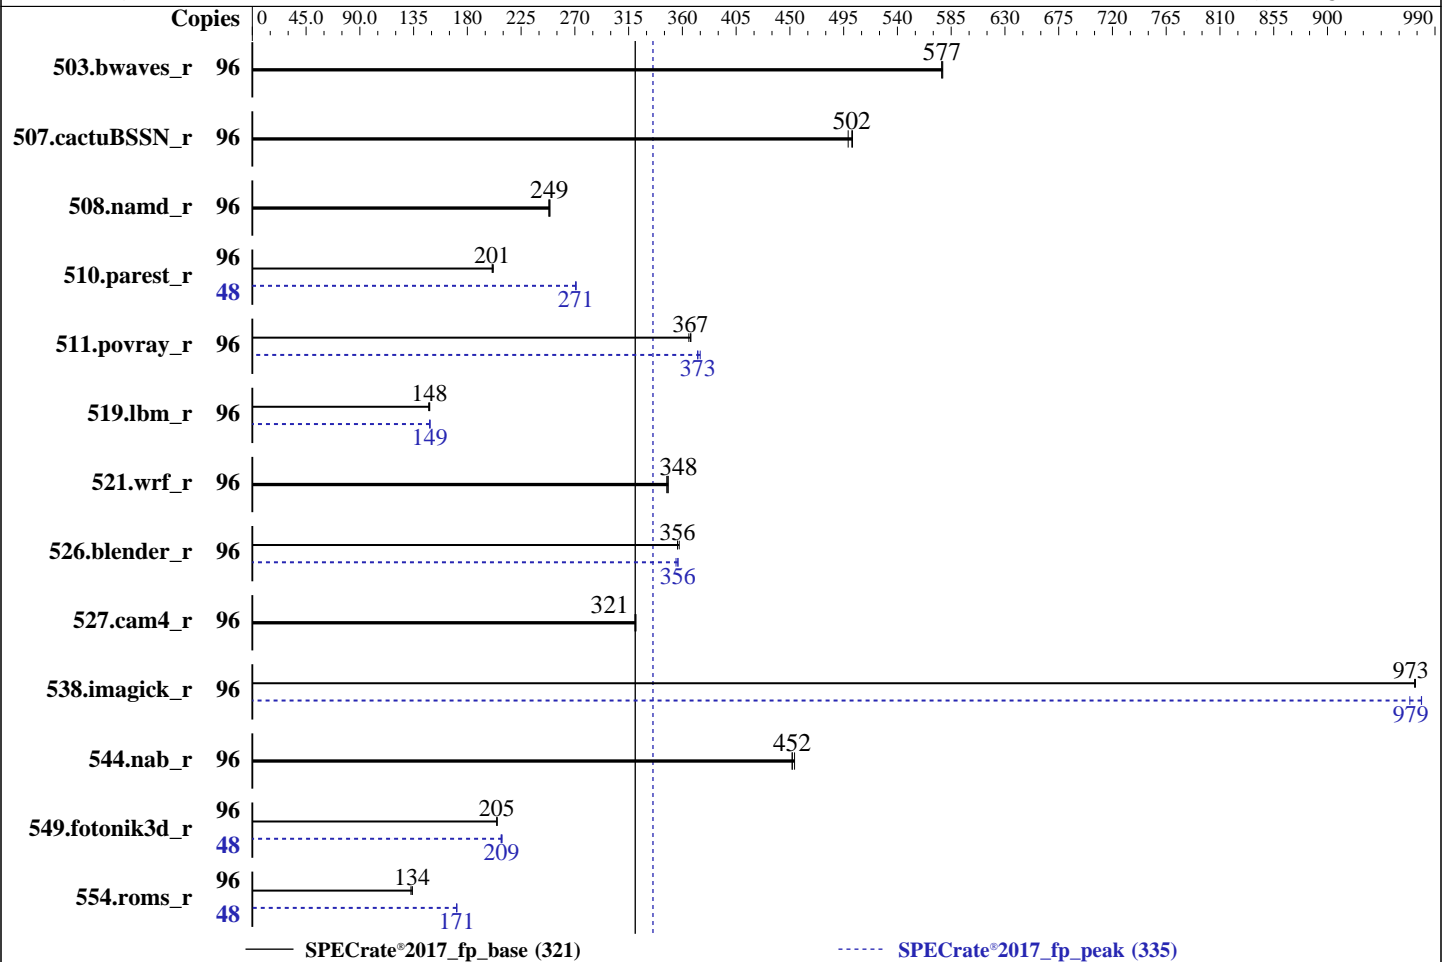

Hardware

CPU Name: AMD EPYC 7352
 Max MHz: 3200
 Nominal: 2300
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 3 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 800 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A42 12/12/2019 released Dec-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1668	577	1667	577	1666	578	96	1668	577	1667	577	1666	578
507.cactuBSSN_r	96	244	499	242	502	242	502	96	244	499	242	502	242	502
508.namd_r	96	367	249	367	248	366	249	96	367	249	367	248	366	249
510.parest_r	96	1250	201	1250	201	1245	202	48	463	271	464	271	464	271
511.povray_r	96	611	367	611	367	613	365	96	601	373	598	375	601	373
519.lbm_r	96	682	148	685	148	681	149	96	681	149	680	149	682	148
521.wrf_r	96	618	348	620	347	618	348	96	618	348	620	347	618	348
526.blender_r	96	411	356	409	357	411	356	96	412	355	410	356	410	356
527.cam4_r	96	524	320	523	321	524	321	96	524	320	523	321	524	321
538.imagick_r	96	245	973	245	974	245	973	96	246	969	244	979	244	979
544.nab_r	96	357	452	358	452	356	454	96	357	452	358	452	356	454
549.fotonik3d_r	96	1827	205	1828	205	1826	205	48	898	208	897	209	895	209
554.roms_r	96	1139	134	1140	134	1149	133	48	446	171	446	171	446	171

SPECrate®2017_fp_base = **321**

SPECrate®2017_fp_peak = **335**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017-bbn/amd_rate_aocc200_rome_C_lib/64:/home/cpu2017-bbn/amd_  
    rate_aocc200_rome_C_lib/32:"  
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power Core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

C-State Efficiency mode set to Enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Platform Notes (Continued)

sysinfo program /home/cpu2017-bbn/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-30t0 Fri Feb 15 05:05:04 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7352 24-Core Processor
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7352 24-Core Processor
Stepping: 0
CPU MHz: 2295.634
BogoMIPS: 4591.26
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 128680 MB
node 0 free: 128450 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 129021 MB
node 1 free: 128767 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 129021 MB
node 2 free: 128808 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 129009 MB
node 3 free: 128750 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 129021 MB
node 4 free: 128753 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 129021 MB
node 5 free: 128820 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 129021 MB
node 6 free: 128825 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 129019 MB
node 7 free: 128826 MB
node distances:
node 0 1 2 3 4 5 6 7

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Platform Notes (Continued)

0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

MemTotal: 1056578020 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

Linux linux-30t0 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Feb 14 19:51

SPEC is set to: /home/cpu2017-bbn

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc2	btrfs	743G	25G	717G	4%	/home

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
  BIOS:      HPE A42 12/12/2019
  Vendor:    HPE
  Product:   ProLiant DL385 Gen10 Plus
  Product Family: ProLiant
  Serial:    CN79310517
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
  16x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++        | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++, C     | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs  
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Dec-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

```
549.fotonik3d_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

```
526.blender_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus
(2.30 GHz, AMD EPYC 7352)

SPECrate®2017_fp_base = 321

SPECrate®2017_fp_peak = 335

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

526.blender_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.html>

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.xml>

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-02-14 18:35:03-0500.

Report generated on 2020-04-28 15:29:51 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.