



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

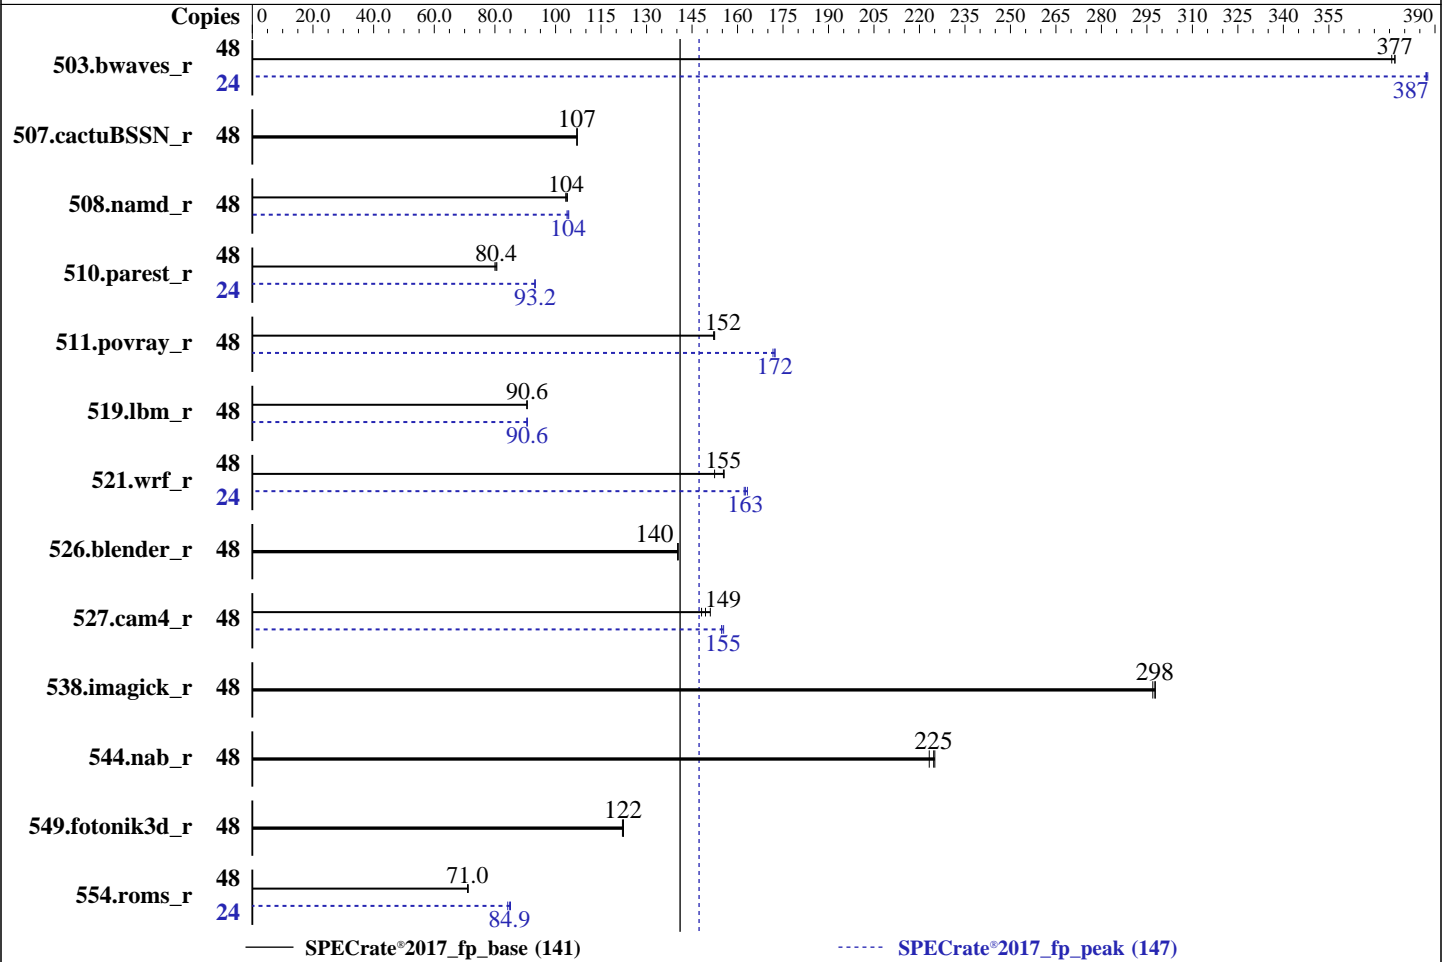

Hardware

CPU Name: Intel Xeon Silver 4214R
 Max MHz: 3500
 Nominal: 2400
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1
 kernel 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 2.6.3 released Feb-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1281	376	<u>1278</u>	<u>377</u>	1277	377	24	621	388	622	387	<u>622</u>	<u>387</u>
507.cactuBSSN_r	48	568	107	567	107	<u>568</u>	<u>107</u>	48	568	107	567	107	<u>568</u>	<u>107</u>
508.namd_r	48	441	103	439	104	<u>440</u>	<u>104</u>	48	437	104	<u>438</u>	<u>104</u>	439	104
510.parest_r	48	1557	80.6	1569	80.0	<u>1562</u>	<u>80.4</u>	24	673	93.3	<u>673</u>	<u>93.2</u>	674	93.2
511.povray_r	48	735	152	<u>736</u>	<u>152</u>	737	152	48	650	172	653	172	<u>650</u>	<u>172</u>
519.lbm_r	48	<u>558</u>	<u>90.6</u>	558	90.6	559	90.6	48	558	90.7	<u>558</u>	<u>90.6</u>	559	90.6
521.wrf_r	48	<u>692</u>	<u>155</u>	691	156	705	152	24	329	163	<u>331</u>	<u>163</u>	331	162
526.blender_r	48	521	140	521	140	<u>521</u>	<u>140</u>	48	521	140	521	140	<u>521</u>	<u>140</u>
527.cam4_r	48	567	148	<u>562</u>	<u>149</u>	556	151	48	<u>542</u>	<u>155</u>	540	155	542	155
538.imagick_r	48	<u>401</u>	<u>298</u>	402	297	401	298	48	<u>401</u>	<u>298</u>	402	297	401	298
544.nab_r	48	<u>360</u>	<u>225</u>	359	225	362	223	48	<u>360</u>	<u>225</u>	359	225	362	223
549.fotonik3d_r	48	<u>1529</u>	<u>122</u>	1528	122	1533	122	48	<u>1529</u>	<u>122</u>	1528	122	1533	122
554.roms_r	48	<u>1074</u>	<u>71.0</u>	1074	71.0	1071	71.2	24	453	84.2	448	85.1	<u>449</u>	<u>84.9</u>

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/dev/shm/cpu2017/lib/intel64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management enabled

PCI ASPM L1 Link Power Management enabled

Sysinfo program /dev/shm/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Fri May 8 22:21:50 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
```

```
2 "physical id"s (chips)
```

```
48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
```

```
siblings : 24
```

```
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
Stepping:              7
CPU MHz:               3183.949
CPU max MHz:           3500.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              16896K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpeltb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

```

node 0 size: 95281 MB
node 0 free: 85638 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96765 MB
node 1 free: 91649 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 96765 MB
node 2 free: 76113 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96764 MB
node 3 free: 91754 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

From /proc/meminfo

```

MemTotal:      394830944 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): via prctl and seccomp
Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 May 8 12:33

SPEC is set to: /dev/shm/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	189G	30G	159G	16%	/dev/shm

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.6.3 02/03/2020

Vendor: Dell Inc.

Product: PowerEdge M640

Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

4x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-m64 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

-m64 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4 -auto

-nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4 -auto

-nostandard-realloc-lhs

Benchmarks using both C and C++:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4 -auto

-nostandard-realloc-lhs

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
510.parest_r: -m64 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

```
549.fotonik3d_r: basepeak = yes
```

```
554.roms_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017_fp_base = 141

SPECrate®2017_fp_peak = 147

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

```
511.povray_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-08 22:21:49-0400.

Report generated on 2020-05-26 14:48:58 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-26.