



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 183

### PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

### SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

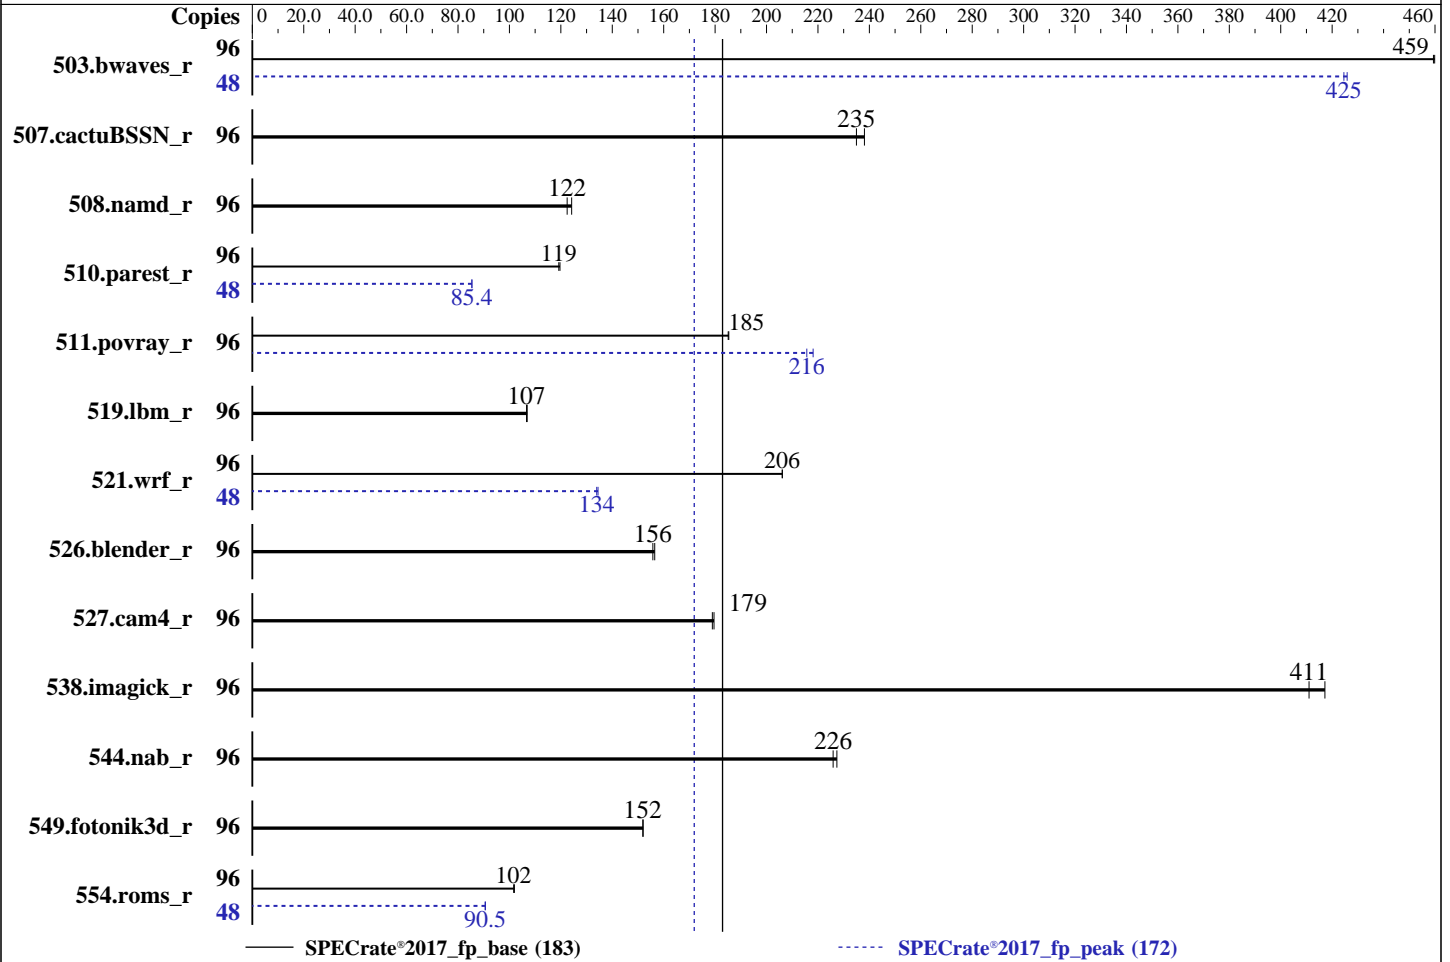

### Hardware

CPU Name: Intel Xeon Gold 6248R  
 Max MHz: 4000  
 Nominal: 3000  
 Enabled: 96 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R, running at 2933)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1  
 kernel 4.18.0-147.8.1.el8\_1.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.7.7 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2020  
Hardware Availability: Feb-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<b>2096</b>	<b>459</b>	2093	460			48	<b>1134</b>	<b>425</b>	1130	426		
507.cactuBSSN_r	96	510	238	<b>517</b>	<b>235</b>			96	510	238	<b>517</b>	<b>235</b>		
508.namd_r	96	734	124	<b>745</b>	<b>122</b>			96	734	124	<b>745</b>	<b>122</b>		
510.parest_r	96	2099	120	<b>2107</b>	<b>119</b>			48	<b>1471</b>	<b>85.4</b>	1470	85.4		
511.povray_r	96	<b>1211</b>	<b>185</b>	1210	185			96	<b>1039</b>	<b>216</b>	1028	218		
519.lbm_r	96	946	107	<b>949</b>	<b>107</b>			96	946	107	<b>949</b>	<b>107</b>		
521.wrf_r	96	<b>1043</b>	<b>206</b>	1043	206			48	<b>803</b>	<b>134</b>	800	134		
526.blender_r	96	<b>939</b>	<b>156</b>	934	157			96	<b>939</b>	<b>156</b>	934	157		
527.cam4_r	96	<b>938</b>	<b>179</b>	935	180			96	<b>938</b>	<b>179</b>	935	180		
538.imagick_r	96	<b>581</b>	<b>411</b>	572	417			96	<b>581</b>	<b>411</b>	572	417		
544.nab_r	96	<b>715</b>	<b>226</b>	711	227			96	<b>715</b>	<b>226</b>	711	227		
549.fotonik3d_r	96	<b>2463</b>	<b>152</b>	2461	152			96	<b>2463</b>	<b>152</b>	2461	152		
554.roms_r	96	<b>1501</b>	<b>102</b>	1496	102			48	841	90.7	<b>843</b>	<b>90.5</b>		

SPECrate®2017\_fp\_base = **183**

SPECrate®2017\_fp\_peak = **172**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

- Sub NUMA Cluster enabled
- Virtualization Technology disabled
- System Profile set to Custom
- CPU Performance set to Maximum Performance
- C States set to Autonomous
- C1E disabled
- Uncore Frequency set to Dynamic
- Energy Efficiency Policy set to Performance
- Memory Patrol Scrub disabled
- Logical Processor disabled
- CPU Interconnect Bus Link Power Management disabled
- PCI ASPM L1 Link Power Management disabled
- UPI Prefetch enabled
- LLC Prefetch disabled
- Dead Line LLC Alloc enabled
- Directory AtoS disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
 running on poweredge-sut-rhel8-1 Sat May 23 03:43:04 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
Stepping:               7
CPU MHz:                3041.741
CPU max MHz:           4000.0000
CPU min MHz:           1200.0000
BogoMIPS:               6000.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```

xtpr pdcml pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
node 0 size: 95305 MB
node 0 free: 94618 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
node 1 size: 96763 MB
node 1 free: 96189 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 96737 MB
node 2 free: 95430 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 96762 MB
node 3 free: 96263 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

```

From /proc/meminfo
MemTotal:      394822668 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux poweredge-sut-rhel8-1 4.18.0-147.8.1.el8_1.x86_64 #1 SMP Wed Feb 26 03:08:15 UTC
2020 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit: Processor vulnerable
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
tsx_async_abort: Mitigation: Clear CPU buffers; SMT vulnerable
```

run-level 3 May 22 10:58 last=5

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.5T 20G 1.4T 2% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: Dell Inc. 2.7.7 05/05/2020
Vendor: Dell Inc.
Product: PowerEdge T640
Product Family: PowerEdge
Serial: 1234567
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
14x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
2x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
4x 00AD00B300AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
4x 00AD069D00AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2020  
Hardware Availability: Feb-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)
-----
```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C | 511.povray_r(peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 183

PowerEdge T640 (Intel Xeon Gold 6248R, 3.00 GHz)

SPECrate®2017\_fp\_peak = 172

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** May-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Apr-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-23 04:43:02-0400.

Report generated on 2020-06-23 18:06:18 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.