



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

### SPECrate®2017\_fp\_base = 508

### SPECrate®2017\_fp\_peak = 509

## Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177


**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

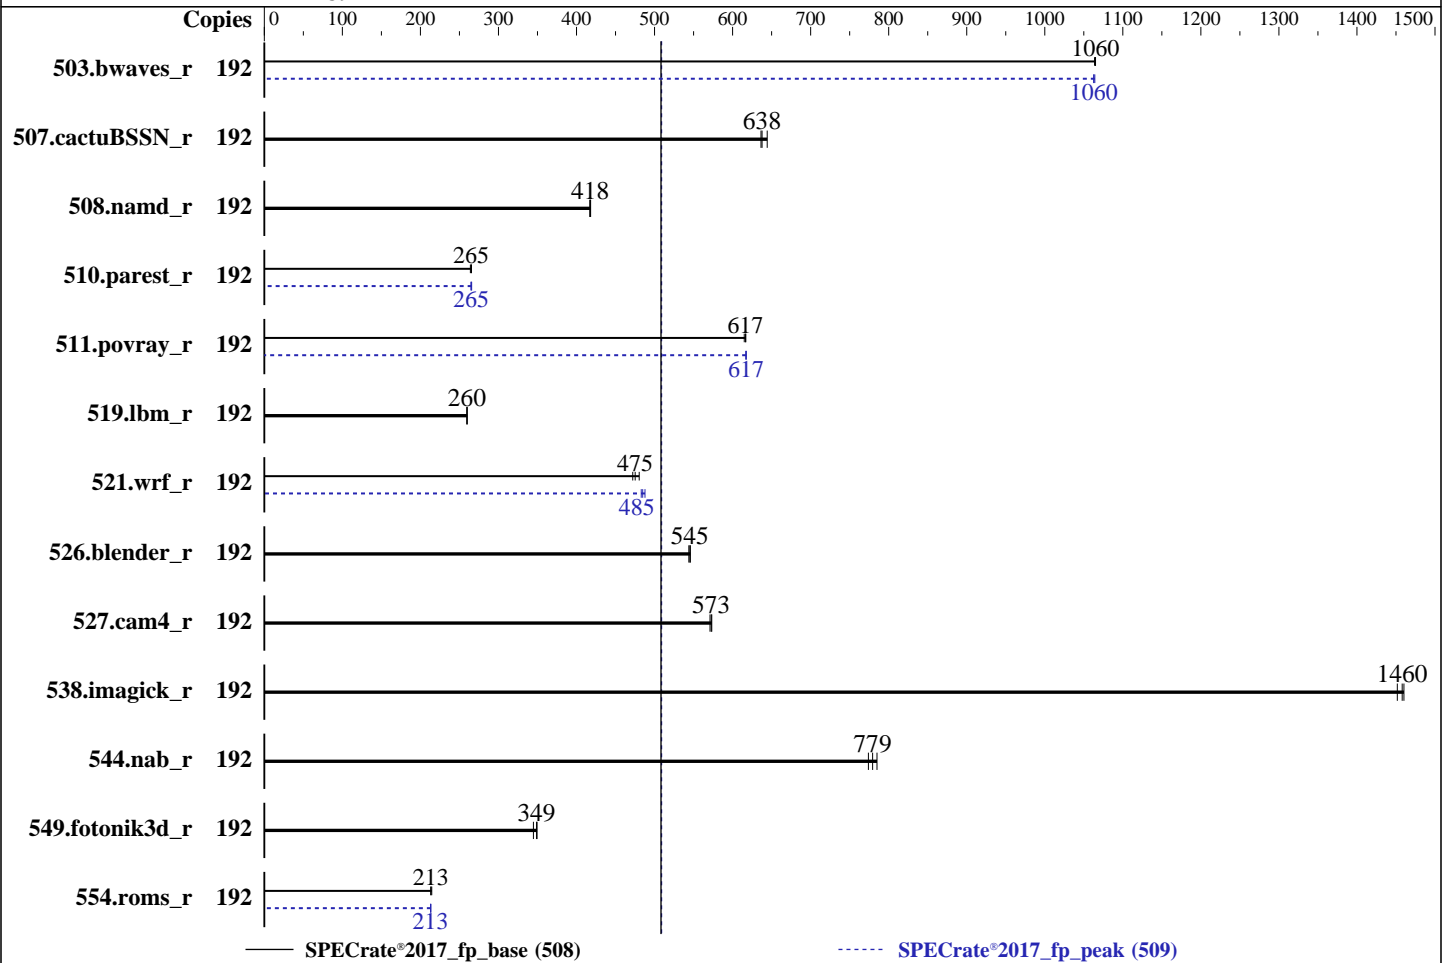

### Hardware

CPU Name: Intel Xeon Platinum 8260  
 Max MHz: 3900  
 Nominal: 2400  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1200 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 6.83 released Jun-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

### Huawei 2488H V5 (Intel Xeon Platinum 8260)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	1808	1070	<b><u>1808</u></b>	<b><u>1060</u></b>	1810	1060	192	<b><u>1811</u></b>	<b><u>1060</u></b>	1812	1060	1809	1060
507.cactuBSSN_r	192	<b><u>381</u></b>	<b><u>638</u></b>	377	644	382	636	192	<b><u>381</u></b>	<b><u>638</u></b>	377	644	382	636
508.namd_r	192	436	418	<b><u>437</u></b>	<b><u>418</u></b>	437	417	192	436	418	<b><u>437</u></b>	<b><u>418</u></b>	437	417
510.parest_r	192	1892	265	1902	264	<b><u>1895</u></b>	<b><u>265</u></b>	192	<b><u>1896</u></b>	<b><u>265</u></b>	1891	266	1896	265
511.povray_r	192	727	617	729	615	<b><u>727</u></b>	<b><u>617</u></b>	192	727	617	<b><u>726</u></b>	<b><u>617</u></b>	726	617
519.lbm_r	192	<b><u>779</u></b>	<b><u>260</u></b>	779	260	779	260	192	<b><u>779</u></b>	<b><u>260</u></b>	779	260	779	260
521.wrf_r	192	895	480	911	472	<b><u>905</u></b>	<b><u>475</u></b>	192	<b><u>887</u></b>	<b><u>485</u></b>	891	483	882	488
526.blender_r	192	536	546	<b><u>536</u></b>	<b><u>545</u></b>	538	544	192	536	546	<b><u>536</u></b>	<b><u>545</u></b>	538	544
527.cam4_r	192	<b><u>586</u></b>	<b><u>573</u></b>	586	573	588	571	192	<b><u>586</u></b>	<b><u>573</u></b>	586	573	588	571
538.imagick_r	192	<b><u>328</u></b>	<b><u>1460</u></b>	327	1460	329	1450	192	<b><u>328</u></b>	<b><u>1460</u></b>	327	1460	329	1450
544.nab_r	192	412	785	<b><u>415</u></b>	<b><u>779</u></b>	417	774	192	412	785	<b><u>415</u></b>	<b><u>779</u></b>	417	774
549.fotonik3d_r	192	2141	349	2170	345	<b><u>2145</u></b>	<b><u>349</u></b>	192	2141	349	2170	345	<b><u>2145</u></b>	<b><u>349</u></b>
554.roms_r	192	<b><u>1430</u></b>	<b><u>213</u></b>	1430	213	1422	215	192	1432	213	<b><u>1432</u></b>	<b><u>213</u></b>	1430	213

SPECrate®2017\_fp\_base = **508**

SPECrate®2017\_fp\_peak = **509**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms. Intel has granted a one-time waiver for this result.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**SPECrate®2017\_fp\_base = 508**

**SPECrate®2017\_fp\_peak = 509**

**Huawei 2488H V5 (Intel Xeon Platinum 8260)**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel6
    4:/usr/local/jemalloc64-5.0.1"
MALLOCONF = "retain:true"
```

## General Notes

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-zwm5 Mon Jul 13 10:19:45 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
```

```
4 "physical id"s (chips)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

### SPECrate®2017\_fp\_base = 508

### SPECrate®2017\_fp\_peak = 509

## Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

192 "processors" cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping:               6
CPU MHz:                2400.000
CPU max MHz:            3900.0000
CPU min MHz:            1000.0000
BogoMIPS:               4800.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0-3,7-9,13-15,19,20,96-99,103-105,109-111,115,116
NUMA node1 CPU(s):     4-6,10-12,16-18,21-23,100-102,106-108,112-114,117-119
NUMA node2 CPU(s):     24-27,31-33,37-39,43,44,120-123,127-129,133-135,139,140
NUMA node3 CPU(s):     28-30,34-36,40-42,45-47,124-126,130-132,136-138,141-143
NUMA node4 CPU(s):     48-51,55-57,61-63,67,68,144-147,151-153,157-159,163,164
NUMA node5 CPU(s):     52-54,58-60,64-66,69-71,148-150,154-156,160-162,165-167
NUMA node6 CPU(s):     72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s):     76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

### Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

```

aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 96 97 98 99 103 104 105 109 110 111 115 116
node 0 size: 95205 MB
node 0 free: 82090 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 100 101 102 106 107 108 112 113 114 117
118 119
node 1 size: 96763 MB
node 1 free: 87186 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 120 121 122 123 127 128 129 133 134
135 139 140
node 2 size: 96763 MB
node 2 free: 87187 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 124 125 126 130 131 132 136 137 138
141 142 143
node 3 size: 96734 MB
node 3 free: 87173 MB
node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 144 145 146 147 151 152 153 157 158
159 163 164
node 4 size: 96763 MB
node 4 free: 87173 MB
node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 148 149 150 154 155 156 160 161 162
165 166 167
node 5 size: 96763 MB
node 5 free: 87202 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 96763 MB
node 6 free: 86858 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 96554 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

### Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

```
node 7 free: 86961 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 11 21 21 21 21 21 21
  1:  11 10 21 21 21 21 21 21
  2:  21 21 10 11 21 21 21 21
  3:  21 21 11 10 21 21 21 21
  4:  21 21 21 21 10 11 21 21
  5:  21 21 21 21 11 10 21 21
  6:  21 21 21 21 21 21 10 11
  7:  21 21 21 21 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      790847096 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-zwm5 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

### Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Jul 10 17:46

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	869G	205G	665G	24%	/

```

From /sys/devices/virtual/dmi/id
  BIOS:      INSYDE Corp. 6.83 06/29/2019
  Vendor:    Huawei
  Product:   2488H V5
  Product Family: Purley
  Serial:    Huawei

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

### Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

### Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

-----  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
 -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

510.parest\_r (continued):

```
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -flto -xCORE-AVX2 -Ofast
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = 509

Huawei 2488H V5 (Intel Xeon Platinum 8260)

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Jul-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revB.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.html)

<http://www.spec.org/cpu2017/flags/CAOIACT-Platform-Settings-CASC-V1.0.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revB.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.xml)

<http://www.spec.org/cpu2017/flags/CAOIACT-Platform-Settings-CASC-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-12 22:19:44-0400.

Report generated on 2020-10-29 22:18:04 by CPU2017 PDF formatter v6255.

Originally published on 2020-08-26.