



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)


Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177
Test Sponsor: China Academy of Information and Communications Technology
Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020
Hardware Availability: Feb-2020
Software Availability: Apr-2020

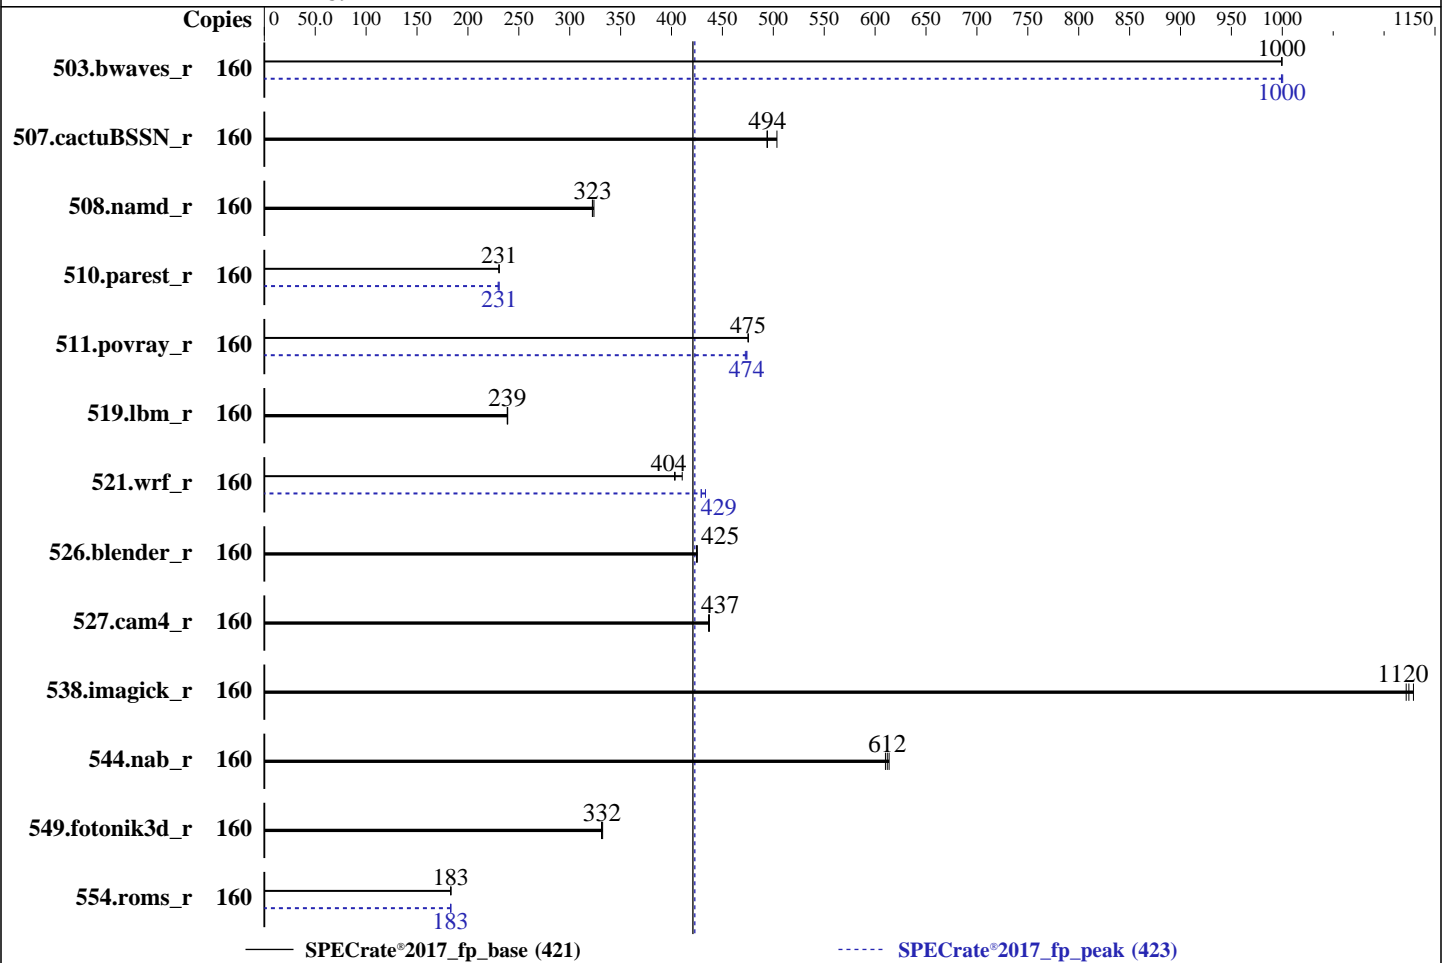

Hardware

CPU Name: Intel Xeon Gold 6230
Max MHz: 3900
Nominal: 2100
Enabled: 80 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 27.5 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 1200 GB SAS SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
Kernel 4.12.14-94.41-default
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version 6.83 released Jun-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	1605	999	1605	1000	<u>1605</u>	<u>1000</u>	160	<u>1605</u>	<u>1000</u>	1604	1000	1606	999
507.cactuBSSN_r	160	402	504	410	494	<u>410</u>	<u>494</u>	160	402	504	410	494	<u>410</u>	<u>494</u>
508.namd_r	160	469	324	<u>471</u>	<u>323</u>	472	322	160	469	324	<u>471</u>	<u>323</u>	472	322
510.parest_r	160	1816	231	1814	231	<u>1815</u>	<u>231</u>	160	<u>1816</u>	<u>231</u>	1822	230	1815	231
511.povray_r	160	786	475	786	475	<u>786</u>	<u>475</u>	160	791	473	<u>788</u>	<u>474</u>	788	474
519.lbm_r	160	705	239	706	239	<u>706</u>	<u>239</u>	160	705	239	706	239	<u>706</u>	<u>239</u>
521.wrf_r	160	889	403	<u>888</u>	<u>404</u>	873	411	160	835	429	827	433	<u>835</u>	<u>429</u>
526.blender_r	160	573	425	574	425	<u>574</u>	<u>425</u>	160	573	425	574	425	<u>574</u>	<u>425</u>
527.cam4_r	160	641	436	640	437	<u>640</u>	<u>437</u>	160	641	436	640	437	<u>640</u>	<u>437</u>
538.imagick_r	160	353	1130	355	1120	<u>354</u>	<u>1120</u>	160	353	1130	355	1120	<u>354</u>	<u>1120</u>
544.nab_r	160	439	614	<u>440</u>	<u>612</u>	441	610	160	439	614	<u>440</u>	<u>612</u>	441	610
549.fotonik3d_r	160	1876	332	<u>1880</u>	<u>332</u>	1882	331	160	1876	332	<u>1880</u>	<u>332</u>	1882	331
554.roms_r	160	1388	183	<u>1388</u>	<u>183</u>	1387	183	160	1387	183	<u>1389</u>	<u>183</u>	1390	183

SPECrate®2017_fp_base = **421**

SPECrate®2017_fp_peak = **423**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms. Intel has granted a one-time waiver for this result.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel6
    4:/usr/local/jemalloc64-5.0.1"
MALLOCONF = "retain:true"
```

General Notes

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-zwm5 Thu Jul 9 10:19:01 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
```

```
4 "physical id"s (chips)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 20
siblings  : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                160
On-line CPU(s) list:  0-159
Thread(s) per core:   2
Core(s) per socket:   20
Socket(s):             4
NUMA node(s):         8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
Stepping:              6
CPU MHz:               2100.000
CPU max MHz:           3900.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s):    3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s):    20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s):    23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s):    40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s):    43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s):    60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s):    63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 95206 MB
node 0 free: 94150 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 96764 MB
node 1 free: 95787 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 96764 MB
node 2 free: 95882 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 96764 MB
node 3 free: 95436 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 96764 MB
node 4 free: 95880 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 96764 MB
node 5 free: 95875 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 96764 MB
node 6 free: 95901 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 96526 MB
node 7 free: 95652 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```

4:  21  21  21  21  10  11  21  21
5:  21  21  21  21  11  10  21  21
6:  21  21  21  21  21  21  10  11
7:  21  21  21  21  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      790853124 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.

```

```

os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

uname -a:

```

Linux linux-zwm5 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

```

run-level 3 Jul 8 10:44

SPEC is set to: /spec2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

/dev/sda3 xfs 869G 128G 742G 15% /

```
From /sys/devices/virtual/dmi/id
BIOS:      INSYDE Corp. 6.83 06/29/2019
Vendor:    Huawei
Product:   2488H V5
Product Family: Purley
Serial:    Huawei
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C                    | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                     | 544.nab_r(base, peak)
=====
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++                   | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C                | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

```

64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.
-----

```

```

=====
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
-----

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran, C      | 521.wrf_r(peak)
-----

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.
-----

```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

Peak Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

510.parest_r (continued):

-ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -mbranches-within-32B-boundaries

-L/usr/local/jemalloc64-5.0.1/ -ljemalloc

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

-nostandard-realloc-lhs -align array32byte -auto

-L/usr/local/jemalloc64-5.0.1/ -ljemalloc

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -m64 -qnextgen -std=c11

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -flto -xCORE-AVX2 -Ofast

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/

-ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei 2488H V5
Intel Xeon Gold 6230

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 423

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.html

<http://www.spec.org/cpu2017/flags/CAOIACT-Platform-Settings-CASC-V1.0.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.xml

<http://www.spec.org/cpu2017/flags/CAOIACT-Platform-Settings-CASC-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-08 22:19:00-0400.

Report generated on 2020-10-29 22:18:04 by CPU2017 PDF formatter v6255.

Originally published on 2020-08-26.