



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)


SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177
Test Sponsor: China Academy of Information and Communications Technology
Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

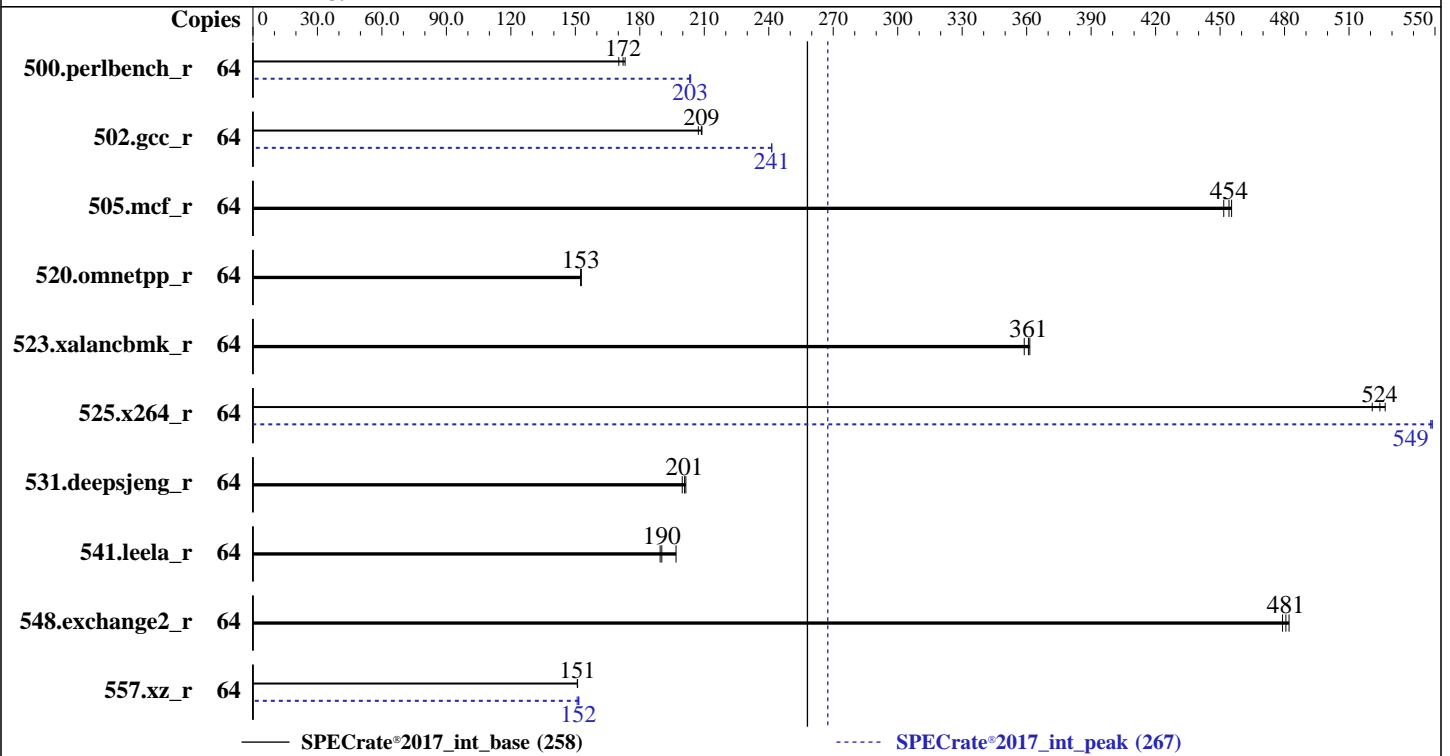

Hardware

CPU Name: Intel Xeon Gold 6234
 Max MHz: 4000
 Nominal: 3300
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1200 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 6.83 released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

Huawei 2488H V5 (Intel Xeon Gold 6234)

SPECrate®2017_int_peak = 267

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	599	170	592	172	588	173	64	501	203	500	204	501	203
502.gcc_r	64	437	207	434	209	434	209	64	375	241	376	241	375	241
505.mcf_r	64	228	454	229	452	227	455	64	228	454	229	452	227	455
520.omnetpp_r	64	551	153	550	153	550	153	64	551	153	550	153	550	153
523.xalancbmk_r	64	188	359	187	361	187	361	64	188	359	187	361	187	361
525.x264_r	64	214	524	215	521	213	527	64	204	548	204	549	204	549
531.deepsjeng_r	64	367	200	365	201	364	201	64	367	200	365	201	364	201
541.leela_r	64	559	189	557	190	538	197	64	559	189	557	190	538	197
548.exchange2_r	64	350	479	348	482	349	481	64	350	479	348	482	349	481
557.xz_r	64	458	151	458	151	458	151	64	456	152	458	151	456	152

SPECrate®2017_int_base = **258**

SPECrate®2017_int_peak = **267**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms. Intel has granted a one-time waiver for this result.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64
4:/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Environment Variables Notes (Continued)

```
/usr/local/jemalloc32-5.0.1"
MALLOCONF = "retain:true"
```

General Notes

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Power Policy Set to Performance
SNC Set to Enabled
IMC Interleaving Set to 1-way Interleave
XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-zwm5 Sun Jul 19 12:53:37 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

```

cpu cores : 8
siblings  : 16
physical 0: cores 1 3 8 9 18 19 20 25
physical 1: cores 2 3 4 8 11 17 25 27
physical 2: cores 2 3 4 17 18 24 25 27
physical 3: cores 2 3 4 9 20 24 25 27

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
Stepping:               7
CPU MHz:                3300.000
CPU max MHz:            4000.0000
CPU min MHz:            1200.0000
BogoMIPS:               6600.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0,2,3,7,32,34,35,39
NUMA node1 CPU(s):     1,4-6,33,36-38
NUMA node2 CPU(s):     8,11,13,14,40,43,45,46
NUMA node3 CPU(s):     9,10,12,15,41,42,44,47
NUMA node4 CPU(s):     16,19,21,22,48,51,53,54
NUMA node5 CPU(s):     17,18,20,23,49,50,52,55
NUMA node6 CPU(s):     24,27,29,30,56,59,61,62
NUMA node7 CPU(s):     25,26,28,31,57,58,60,63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 2 3 7 32 34 35 39
node 0 size: 95207 MB
node 0 free: 94980 MB
node 1 cpus: 1 4 5 6 33 36 37 38
node 1 size: 96765 MB
node 1 free: 96633 MB
node 2 cpus: 8 11 13 14 40 43 45 46
node 2 size: 88701 MB
node 2 free: 88576 MB
node 3 cpus: 9 10 12 15 41 42 44 47
node 3 size: 96765 MB
node 3 free: 96625 MB
node 4 cpus: 16 19 21 22 48 51 53 54
node 4 size: 96765 MB
node 4 free: 96635 MB
node 5 cpus: 17 18 20 23 49 50 52 55
node 5 size: 96736 MB
node 5 free: 96574 MB
node 6 cpus: 24 27 29 30 56 59 61 62
node 6 size: 96765 MB
node 6 free: 96632 MB
node 7 cpus: 25 26 28 31 57 58 60 63
node 7 size: 96556 MB
node 7 free: 96151 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

7: 21 21 21 21 21 21 11 10

From /proc/meminfo

```
MemTotal:      782604636 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux-zwm5 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW
```

run-level 3 Jul 19 12:34

SPEC is set to: /spec2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   869G  140G  729G  17% /
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

BIOS: INSYDE Corp. 6.83 06/29/2019
Vendor: Huawei
Product: 2488H V5
Product Family: Purley
Serial: Huawei

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 557.xz_r(peak)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc (NextGen): command line warning #10430: Unsupported command line options
encountered
These options as listed are not supported with the compiler selected.
For more information, use '-qnextgen-diag'.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Compiler Version Notes (Continued)

option list:
-no-prec-div

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 557.xz_r(peak)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc (NextGen): command line warning #10430: Unsupported command line options
encountered
These options as listed are not supported with the compiler selected.
For more information, use '-qnextgen-diag'.
option list:
-no-prec-div

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Compiler Version Notes (Continued)

C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 557.xz_r(peak)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc (NextGen): command line warning #10430: Unsupported command line options
encountered
These options as listed are not supported with the compiler selected.
For more information, use '-qnextgen-diag'.
option list:
-no-prec-div

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Compiler Version Notes (Continued)

icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 557.xz_r(peak)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc (NextGen): command line warning #10430: Unsupported command line options encountered

These options as listed are not supported with the compiler selected.

For more information, use '-qnextgen-diag'.

option list:

-no-prec-div
=====

=====
C | 500.perlbench_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Compiler Version Notes (Continued)

| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 30-jul-2020 UTC.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Peak Portability Flags (Continued)

```

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

```

```

502.gcc_r: -m32
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-W1,-plugin-opt=-x86-branches-within-32B-boundaries
-W1,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/
-ljemalloc

```

505.mcf_r: basepeak = yes

```

525.x264_r: -m64 -qnextgen -std=c11
-W1,-plugin-opt=-x86-branches-within-32B-boundaries
-W1,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

```

```

557.xz_r: -m64 -qnextgen -std=c11
-W1,-plugin-opt=-x86-branches-within-32B-boundaries
-W1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

Huawei 2488H V5 (Intel Xeon Gold 6234)

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jul-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

557.xz_r (continued):

-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revB.html

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.0.2020-08-21.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revB.xml

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.0.2020-08-21.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-19 00:53:37-0400.

Report generated on 2020-10-29 21:30:20 by CPU2017 PDF formatter v6255.

Originally published on 2020-08-21.