



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix


SPECrate®2017\_int\_base = 327

## R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

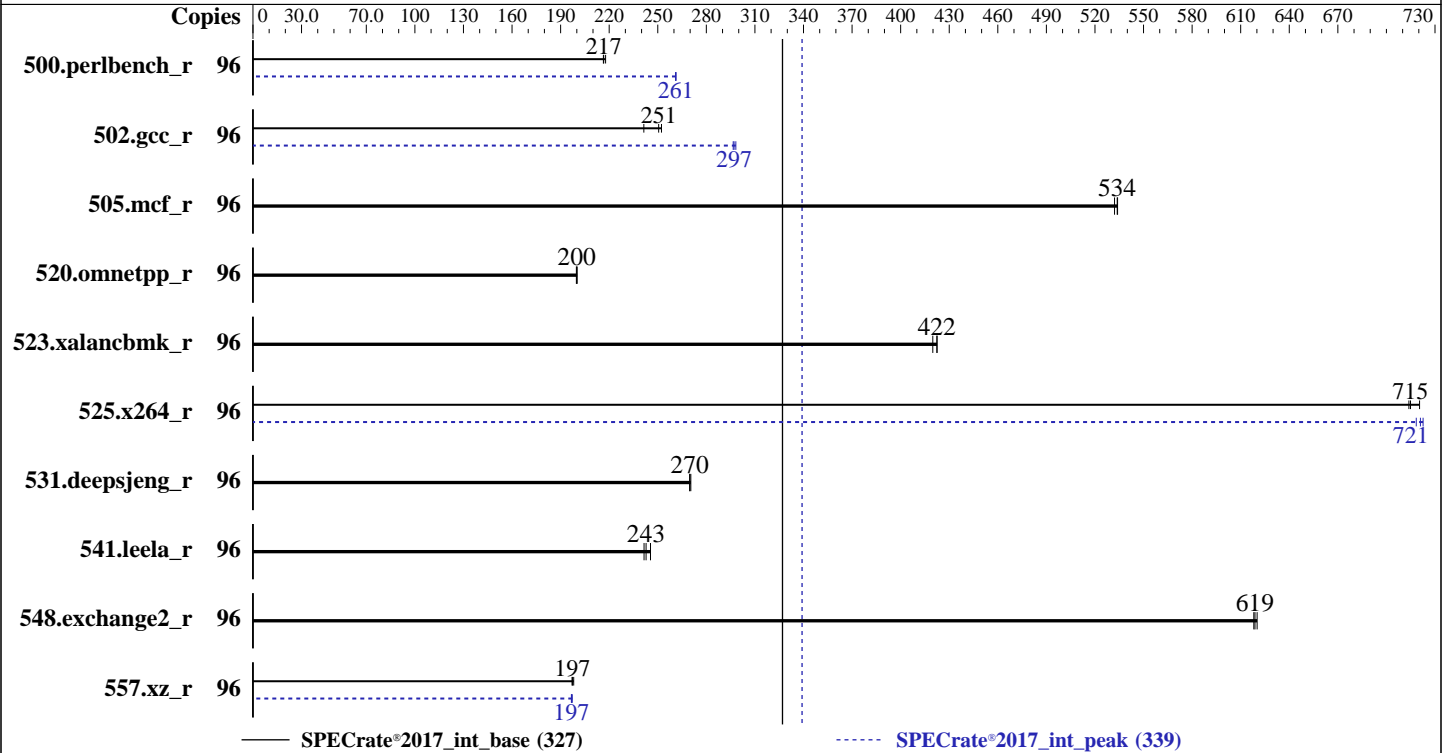

### Hardware

CPU Name: Intel Xeon Gold 6240R  
 Max MHz: 4000  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 1x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.0 (Ootpa) 4.18.0-80.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux Build 20200306; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux Build 20200306;  
 Parallel: No  
 Firmware: Nettrix BIOS Version NJGS041227 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix

SPECrate®2017\_int\_base = 327

## R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	702	218	<b>706</b>	<b>217</b>	706	216	96	585	261	586	261	<b>585</b>	<b>261</b>
502.gcc_r	96	539	252	<b>543</b>	<b>251</b>	563	241	96	458	297	456	298	<b>457</b>	<b>297</b>
505.mcf_r	96	292	532	291	534	<b>291</b>	<b>534</b>	96	292	532	291	534	<b>291</b>	<b>534</b>
520.omnetpp_r	96	<b>630</b>	<b>200</b>	629	200	631	200	96	<b>630</b>	<b>200</b>	629	200	631	200
523.xalancbmk_r	96	<b>240</b>	<b>422</b>	240	422	241	420	96	<b>240</b>	<b>422</b>	240	422	241	420
525.x264_r	96	233	720	<b>235</b>	<b>715</b>	235	714	96	233	723	<b>233</b>	<b>721</b>	234	718
531.deepsjeng_r	96	407	270	408	270	<b>408</b>	<b>270</b>	96	407	270	408	270	<b>408</b>	<b>270</b>
541.leela_r	96	648	246	658	242	<b>655</b>	<b>243</b>	96	648	246	658	242	<b>655</b>	<b>243</b>
548.exchange2_r	96	406	620	407	618	<b>406</b>	<b>619</b>	96	406	620	407	618	<b>406</b>	<b>619</b>
557.xz_r	96	<b>525</b>	<b>197</b>	523	198	526	197	96	527	197	<b>527</b>	<b>197</b>	526	197

SPECrate®2017\_int\_base = **327**

SPECrate®2017\_int\_peak = **339**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tuning Kernel Parameters:

```
sched_migration_cost_ns=1000
sched_rt_runtime_us=990000
sched_latency_ns=24000000
sched_min_granularity_ns=8000000
dirty_background_ratio=10
dirty_ratio=40
dirty_writeback_centisecs=1500
dirty_expire_centisecs=10000
swappiness=10
numa_balancing=0
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/admin/benchmarks/cpu2017/lib/intel64:/home/admin/benchmarks/cpu2017/lib/ia32:/home/admin/benchmarks/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

Application Performance Profile Set to Computing Throughput Mode  
Hyper-Threading set to Enabled  
MONITOR/MWAIT set to Enabled  
Autonomous Core C-State set to Enabled  
SNC set to Enabled  
IMC set to 1-Way Interleaving  
XPT Prefetch set to Enabled  
KTI Prefetch set to Disabled  
Stale AtoS set to Enabled  
Patrol Scrub set to Disabled  
LLC Dead Line Allocation set to Disabled  
BMC Settings:  
Cooling Policy set to Manual Mode  
Fan Duty set to 95  
  
Sysinfo program /home/admin/benchmarks/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

running on localhost.localdomain Fri Jul 31 14:15:15 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz
Stepping: 7
CPU MHz: 2204.877
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_lld
arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68
node 0 size: 95091 MB
node 0 free: 83742 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71
node 1 size: 96763 MB
node 1 free: 87042 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
node 2 size: 96763 MB
node 2 free: 86837 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
node 3 size: 96738 MB
node 3 free: 87115 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 394604992 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix

SPECrate®2017\_int\_base = 327

## R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

```
run-level 3 Jul 30 13:43
```

```
SPEC is set to: /home/admin/benchmarks/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   877G  143G  734G  17% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS: American Megatrends Inc. NJGS041227 05/16/2020
Vendor: Nettrix
Product: R620 G30
Product Family: Rack
Serial: 302000666
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
24x Samsung M393A2K43DB2-CWE 16 GB 2 rank 3200
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallo
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin  
-std=gnu89  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: -m64 -qnextgen -std=c11

```
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math  
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V3.0-CLX-revB.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_int\_base = 327

R620 G30 (Intel Xeon Gold 6240R)

SPECrate®2017\_int\_peak = 339

**CPU2017 License:** 6138

**Test Sponsor:** Nettrix

**Tested by:** Nettrix

**Test Date:** Jul-2020

**Hardware Availability:** May-2020

**Software Availability:** Apr-2020

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V3.0-CLX-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-31 02:15:15-0400.

Report generated on 2020-09-01 19:15:31 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-01.