



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)


**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

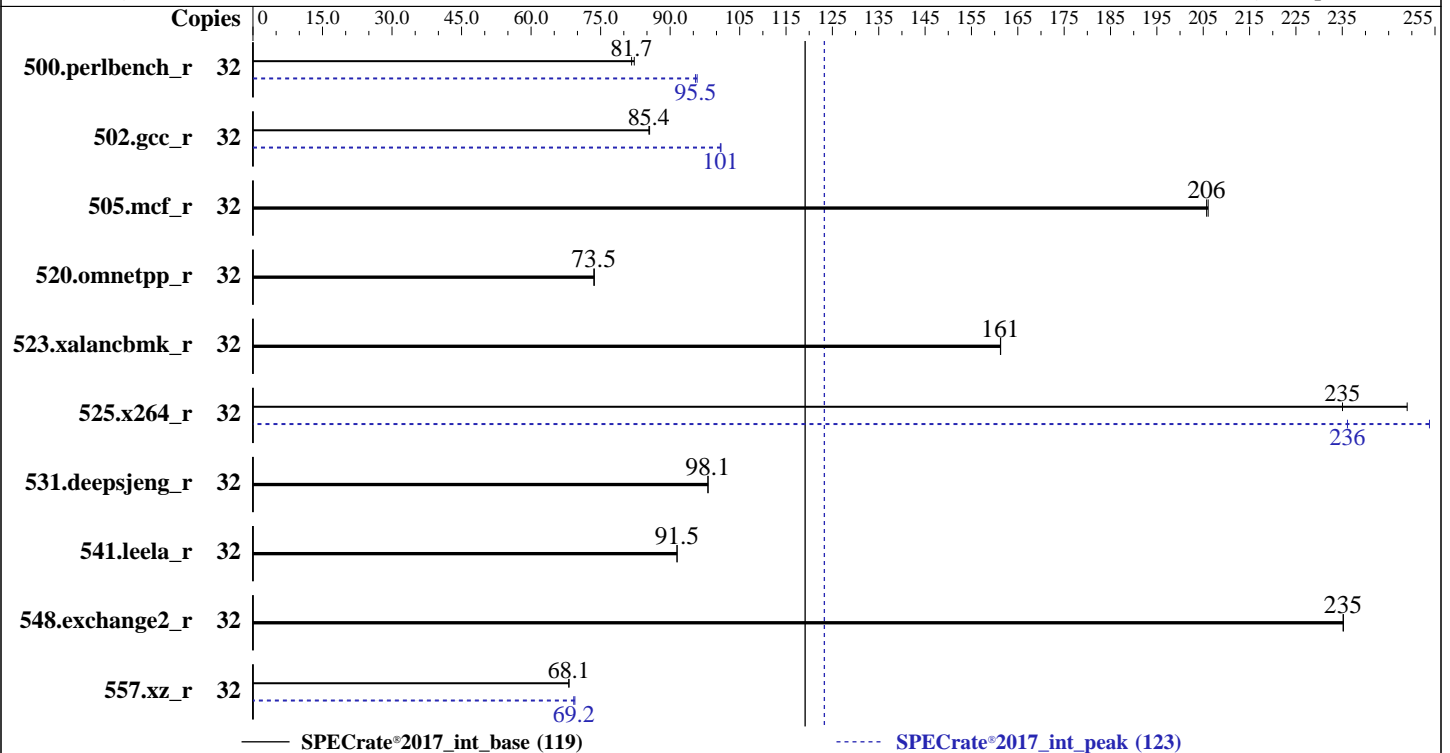

### Hardware

CPU Name: Intel Xeon Silver 4215R  
 Max MHz: 4000  
 Nominal: 3200  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.2  
 kernel 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.8.1 released Jun-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.  
(Test Sponsor: Dell Inc)

SPECrate®2017\_int\_base = 119

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECrate®2017\_int\_peak = 123

CPU2017 License: 55  
Test Sponsor: Dell Inc  
Tested by: Dell Inc.

Test Date: Oct-2020  
Hardware Availability: Jul-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	619	82.3	<b>624</b>	<b>81.7</b>			32	<b>534</b>	<b>95.5</b>	532	95.8		
502.gcc_r	32	<b>530</b>	<b>85.4</b>	530	85.6			32	449	101	<b>449</b>	<b>101</b>		
505.mcf_r	32	251	206	<b>251</b>	<b>206</b>			32	251	206	<b>251</b>	<b>206</b>		
520.omnetpp_r	32	<b>571</b>	<b>73.5</b>	570	73.7			32	<b>571</b>	<b>73.5</b>	570	73.7		
523.xalancbmk_r	32	<b>210</b>	<b>161</b>	209	161			32	<b>210</b>	<b>161</b>	209	161		
525.x264_r	32	<b>238</b>	<b>235</b>	225	249			32	221	254	<b>237</b>	<b>236</b>		
531.deepsjeng_r	32	373	98.2	<b>374</b>	<b>98.1</b>			32	373	98.2	<b>374</b>	<b>98.1</b>		
541.leela_r	32	<b>579</b>	<b>91.5</b>	579	91.5			32	<b>579</b>	<b>91.5</b>	579	91.5		
548.exchange2_r	32	<b>357</b>	<b>235</b>	356	235			32	<b>357</b>	<b>235</b>	356	235		
557.xz_r	32	507	68.2	<b>507</b>	<b>68.1</b>			32	<b>499</b>	<b>69.2</b>	498	69.4		

SPECrate®2017\_int\_base = 119

SPECrate®2017\_int\_peak = 123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-ic19.lul/lib/intel64:/home/cpu2017-ic19.lul/lib/ia32:/home/cpu2017-ic19.lul/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub set to standard  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
UPI Prefetch enabled  
LLC Prefetch disabled  
Dead Line LLC Alloc enabled  
Directory AtoS disabled  
  
Sysinfo program /home/cpu2017-ic19.lul/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on RHEL-8-2-SUT Fri Oct 2 07:45:09 2020  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>  
  
From /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

model name : Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz  
Stepping: 7  
CPU MHz: 3597.721  
CPU max MHz: 4000.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 6400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 11264K  
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30  
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_l1d

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECrate®2017\_int\_base = 119

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECrate®2017\_int\_peak = 123

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

arch\_capabilities

/proc/cpuinfo cache data  
cache size : 11264 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30
node 0 size: 192074 MB
node 0 free: 191160 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31
node 1 size: 193504 MB
node 1 free: 192886 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo  
MemTotal: 394832336 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux"  
VERSION="8.2 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.2"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"  
ANSI\_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.2:ga

uname -a:  
Linux RHEL-8-2-SUT 4.18.0-193.el8.x86\_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:	KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected  
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
 tsx\_async\_abort: Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Oct 2 07:43 last=5

SPEC is set to: /home/cpu2017-ic19.1u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	7.1G	385G	2%	/home

From /sys/devices/virtual/dmi/id

```

BIOS: Dell Inc. 2.8.1 06/30/2020
Vendor: Dell Inc.
Product: PowerEdge R540
Product Family: PowerEdge
  
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

1x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
6x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
5x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
4x Not Specified Not Specified
  
```

(End of data from sysinfo program)

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
 The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Compiler Version Notes

C | 502.gcc\_r(peak)

-----  
 Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
 Build 20200304  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 -----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
=====

-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
=====

-----  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
=====

-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
=====

-----  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECrate®2017\_int\_base = 119

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECrate®2017\_int\_peak = 123

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECrate®2017\_int\_base = 119

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECrate®2017\_int\_peak = 123

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

**SPECrate®2017\_int\_base = 119**

**PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)**

**SPECrate®2017\_int\_peak = 123**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Oct-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -m64 -qnextgen -std=c11
-Wl, -plugin-opt=-x86-branches-within-32B-boundaries
-Wl, -z, muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallo
```

```
557.xz_r: -Wl, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-02 08:45:09-0400.  
Report generated on 2020-11-10 15:19:05 by CPU2017 PDF formatter v6255.  
Originally published on 2020-11-10.