



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55


Test Date: Oct-2020

Test Sponsor: Dell Inc

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

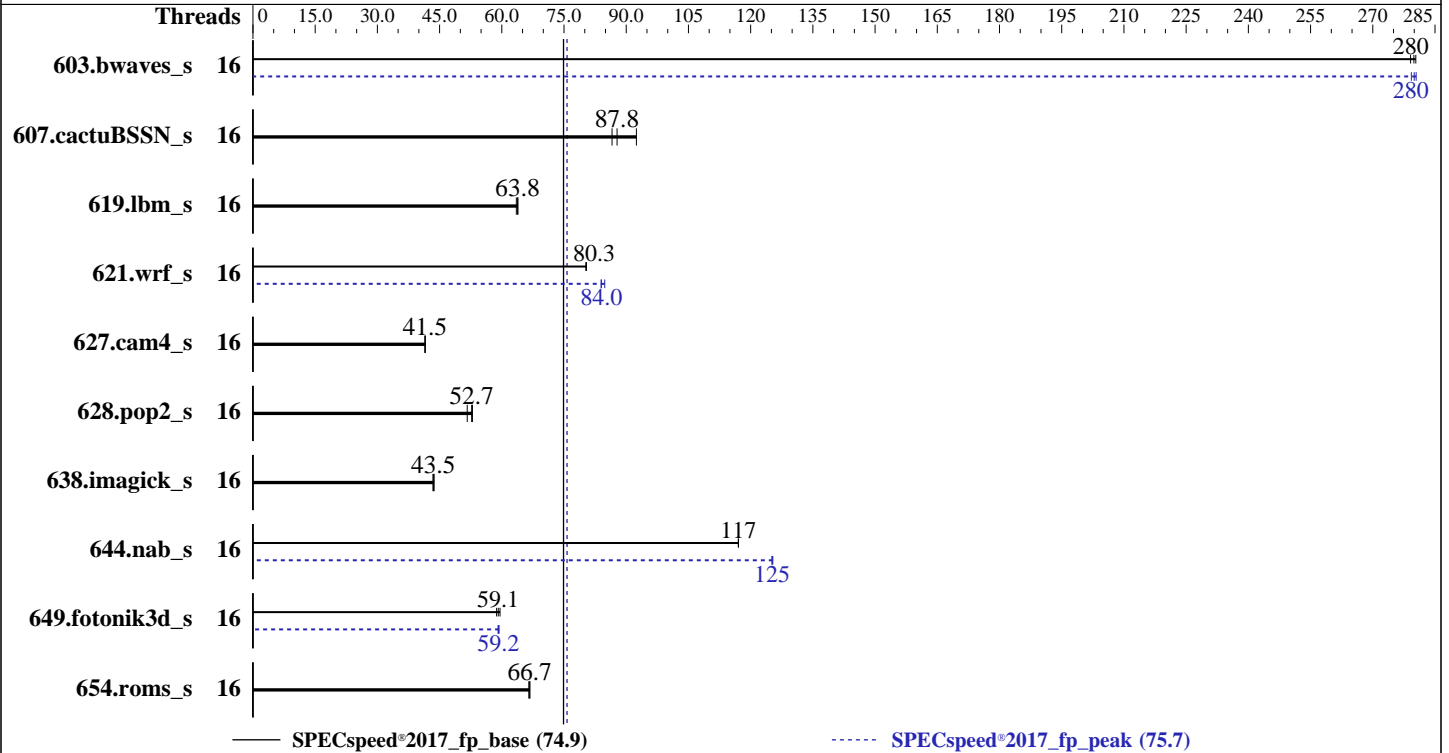

Hardware

CPU Name: Intel Xeon Silver 4215R
 Max MHz: 4000
 Nominal: 3200
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.2
 kernel 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 2.8.1 released Jun-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECSpeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECSpeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	211	280	211	279	210	280	16	211	280	211	279	210	280
607.cactuBSSN_s	16	193	86.6	190	87.8	180	92.5	16	193	86.6	190	87.8	180	92.5
619.lbm_s	16	82.5	63.5	82.0	63.9	82.1	63.8	16	82.5	63.5	82.0	63.9	82.1	63.8
621.wrf_s	16	165	80.4	165	80.3	165	80.3	16	158	83.9	156	84.8	157	84.0
627.cam4_s	16	214	41.5	214	41.5	213	41.5	16	214	41.5	214	41.5	213	41.5
628.pop2_s	16	225	52.7	230	51.7	224	52.9	16	225	52.7	230	51.7	224	52.9
638.imagick_s	16	330	43.7	332	43.4	332	43.5	16	330	43.7	332	43.4	332	43.5
644.nab_s	16	149	117	149	117	149	117	16	140	125	139	125	140	125
649.fotonik3d_s	16	155	58.7	153	59.6	154	59.1	16	154	59.1	154	59.3	154	59.2
654.roms_s	16	236	66.7	237	66.5	236	66.8	16	236	66.7	237	66.5	236	66.8

SPECSpeed®2017_fp_base = **74.9**

SPECSpeed®2017_fp_peak = **75.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/home/cpu2017-ic19.lul/lib/intel64:/home/cpu2017-ic19.lul/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub set to standard
Logical Processor disabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
UPI Prefetch enabled
LLC Prefetch disabled
Dead Line LLC Alloc enabled
Directory AtoS disabled

Sysinfo program /home/cpu2017-ic19.lul/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on RHEL-8-2-SUT Sun Oct 4 10:08:58 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Platform Notes (Continued)

model name : Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz
Stepping: 7
CPU MHz: 1976.578
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 6400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECSpeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECSpeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Platform Notes (Continued)

arch_capabilities

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192048 MB
node 0 free: 185492 MB
node 1 cpus: 1 3 5 7 9 11 13 15
node 1 size: 193533 MB
node 1 free: 191789 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

```
From /proc/meminfo
MemTotal: 394835732 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux RHEL-8-2-SUT 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit: KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
 tsx_async_abort: Mitigation: Clear CPU buffers; SMT disabled

run-level 3 Oct 4 05:35 last=5

SPEC is set to: /home/cpu2017-ic19.1u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	14G	379G	4%	/home

From /sys/devices/virtual/dmi/id
 BIOS: Dell Inc. 2.8.1 06/30/2020
 Vendor: Dell Inc.
 Product: PowerEdge R540
 Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 1x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 6x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 5x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.1.1.217 Build 20200306
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECSpeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECSpeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.
(Test Sponsor: Dell Inc)

SPECspeed®2017_fp_base = 74.9

PowerEdge R540 (Intel Xeon Silver 4215R, 3.2 GHz)

SPECspeed®2017_fp_peak = 75.7

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Oct-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-04 11:08:57-0400.
Report generated on 2020-11-10 15:19:11 by CPU2017 PDF formatter v6255.
Originally published on 2020-11-10.