



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2020  
Hardware Availability: Nov-2020  
Software Availability: Aug-2020

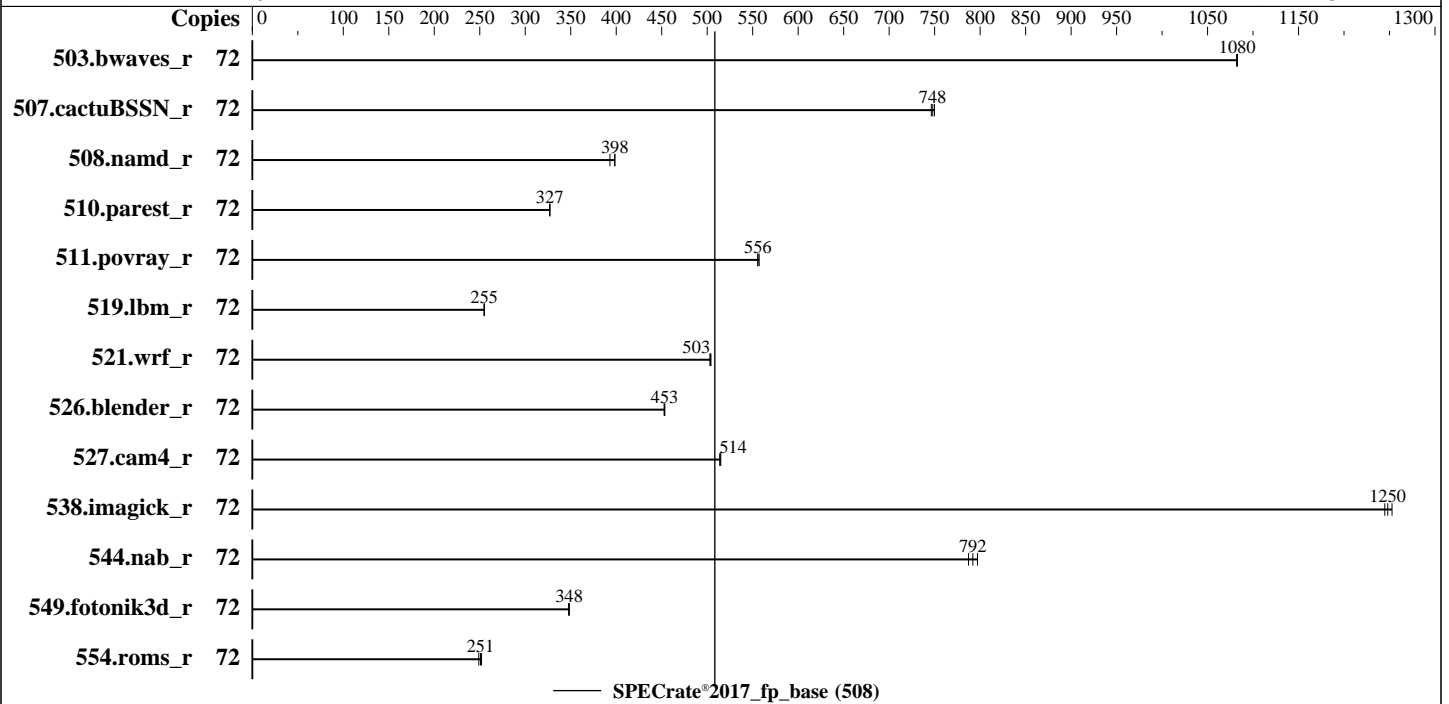

### Hardware

CPU Name: Intel Xeon Platinum 8354H  
Max MHz: 4300  
Nominal: 3100  
Enabled: 72 cores, 4 chips  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x SATA M.2 SSD, 480GB  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default  
Compiler: C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.8.0 for D3892-A1x. Released Jan-2021 tested as V1.0.0.0 R1.1.1 for D3892-A1x Sep-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2020  
Hardware Availability: Nov-2020  
Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	667	1080	667	1080	<b>667</b>	<b>1080</b>							
507.cactuBSSN_r	72	122	746	122	750	<b>122</b>	<b>748</b>							
508.namd_r	72	172	399	174	393	<b>172</b>	<b>398</b>							
510.parest_r	72	<b>576</b>	<b>327</b>	576	327	576	327							
511.povray_r	72	303	556	<b>302</b>	<b>556</b>	302	557							
519.lbm_r	72	<b>298</b>	<b>255</b>	298	255	297	255							
521.wrf_r	72	<b>320</b>	<b>503</b>	321	503	320	504							
526.blender_r	72	242	453	<b>242</b>	<b>453</b>	242	453							
527.cam4_r	72	<b>245</b>	<b>514</b>	245	514	245	515							
538.imagick_r	72	143	1250	<b>143</b>	<b>1250</b>	144	1240							
544.nab_r	72	<b>153</b>	<b>792</b>	154	787	152	797							
549.fotonik3d_r	72	805	348	<b>806</b>	<b>348</b>	807	348							
554.roms_r	72	460	249	454	252	<b>456</b>	<b>251</b>							

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.2.275 Build 20200623 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.2.275 Build 20200623 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-71  
Irqbalance disabled with "systemctl stop irqbalance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/Benchmark/speccpu-ic19\_lu2/lib/intel64:/home/Benchmark/speccpu-ic19\_lu2/je5.0.1-64"

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

## Environment Variables Notes (Continued)

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Hyper Threading = Disabled  
Utilization Profile = Unbalanced  
Stale AtoS = Enabled  
LLC Deadline Alloc = Disabled  
SNC = Enabled  
FAN Control = Full  
  
Sysinfo program /home/Benchmark/speccpu-ic19\_lu2/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost Tue Nov 10 09:20:44 2020  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>  
  
From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8354H CPU @ 3.10GHz  
4 "physical id"s (chips)  
72 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

### Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          46 bits physical, 48 bits virtual
CPU(s):                 72
On-line CPU(s) list:   0-71
Thread(s) per core:    1
Core(s) per socket:    18
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8354H CPU @ 3.10GHz
Stepping:               11
CPU MHz:                1000.048
CPU max MHz:            4300.0000
CPU min MHz:            1000.0000
BogoMIPS:               6200.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0-2,5,6,9,10,14,15
NUMA node1 CPU(s):     3,4,7,8,11-13,16,17
NUMA node2 CPU(s):     18-20,23,24,27,28,32,33
NUMA node3 CPU(s):     21,22,25,26,29-31,34,35
NUMA node4 CPU(s):     36-38,41,42,45,46,50,51
NUMA node5 CPU(s):     39,40,43,44,47-49,52,53
NUMA node6 CPU(s):     54-56,59,60,63,64,68,69
NUMA node7 CPU(s):     57,58,61,62,65-67,70,71
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

### Platform Notes (Continued)

invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local avx512\_bf16 dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15
node 0 size: 192130 MB
node 0 free: 191905 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17
node 1 size: 193533 MB
node 1 free: 193400 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33
node 2 size: 193499 MB
node 2 free: 193370 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35
node 3 size: 193533 MB
node 3 free: 193328 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51
node 4 size: 193533 MB
node 4 free: 193387 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53
node 5 size: 193533 MB
node 5 free: 193355 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69
node 6 size: 193533 MB
node 6 free: 193401 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71
node 7 size: 193307 MB
node 7 free: 193165 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 20 20 20 20 20 20
 1:  11 10 20 20 20 20 20 20
 2:  20 20 10 11 20 20 20 20
 3:  20 20 11 10 20 20 20 20
 4:  20 20 20 20 10 11 20 20
 5:  20 20 20 20 11 10 20 20
 6:  20 20 20 20 20 20 10 11
 7:  20 20 20 20 20 20 11 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

### Platform Notes (Continued)

From /proc/meminfo

MemTotal: 1583723884 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="SLES"  
VERSION="15-SP2"  
VERSION\_ID="15.2"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP2"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb\_multihit: Not affected  
CVE-2018-3620 (L1 Terminal Fault): Not affected  
Microarchitectural Data Sampling: Not affected  
CVE-2017-5754 (Meltdown): Not affected  
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
srbds: Not affected  
tsx\_async\_abort: Not affected

run-level 3 Nov 10 09:16

SPEC is set to: /home/Benchmark/speccpu-ic19\_lu2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	376G	92G	284G	25%	/home

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU V1.0.0.0 R1.1.1 for D3892-A1x 09/25/2020  
Vendor: FUJITSU  
Product: PRIMERGY RX4770 M6  
Product Family: SERVER

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2020  
Hardware Availability: Nov-2020  
Software Availability: Aug-2020

### Platform Notes (Continued)

Serial: MABTxxxxxx

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

### Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H, 3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2020  
**Hardware Availability:** Nov-2020  
**Software Availability:** Aug-2020

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8354H,  
3.10GHz

SPECrate®2017\_fp\_base = 508

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Aug-2020

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.html>

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-09 19:20:43-0500.

Report generated on 2021-01-05 14:45:56 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-05.