



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082


Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

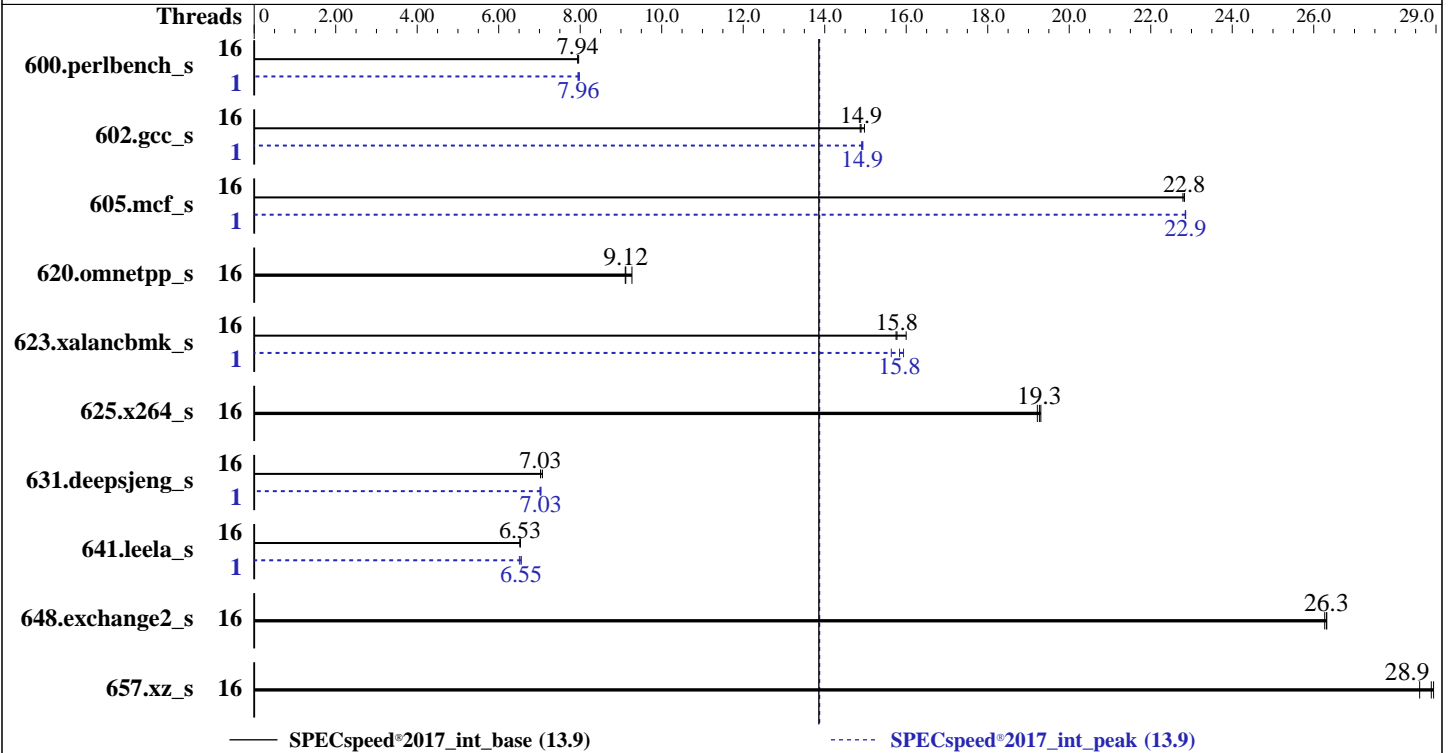

Hardware

CPU Name: AMD EPYC 72F3
 Max MHz: 4100
 Nominal: 3700
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB per core
 Other: None
 Memory: 1 TB (16 x 64 GB 4DRx16 PC4-3200AA-L)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Ubuntu 20.04.1 LTS
 5.4.0-65-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Version M02 released Feb-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	224	7.94	<u>223</u>	<u>7.94</u>	223	7.96	1	222	7.98	<u>223</u>	<u>7.96</u>	223	7.95
602.gcc_s	16	266	15.0	268	14.9	<u>267</u>	<u>14.9</u>	1	267	14.9	267	14.9	<u>267</u>	<u>14.9</u>
605.mcf_s	16	<u>207</u>	<u>22.8</u>	207	22.8	207	22.8	1	207	22.9	<u>207</u>	<u>22.9</u>	207	22.8
620.omnetpp_s	16	176	9.27	179	9.11	<u>179</u>	<u>9.12</u>	16	176	9.27	179	9.11	<u>179</u>	<u>9.12</u>
623.xalancbmk_s	16	<u>89.8</u>	<u>15.8</u>	88.6	16.0	90.0	15.8	1	88.9	15.9	90.6	15.6	<u>89.5</u>	<u>15.8</u>
625.x264_s	16	91.8	19.2	<u>91.5</u>	<u>19.3</u>	91.4	19.3	16	91.8	19.2	<u>91.5</u>	<u>19.3</u>	91.4	19.3
631.deepsjeng_s	16	<u>204</u>	<u>7.03</u>	204	7.03	203	7.07	1	<u>204</u>	<u>7.03</u>	204	7.01	204	7.03
641.leela_s	16	<u>261</u>	<u>6.53</u>	262	6.52	261	6.53	1	260	6.55	<u>261</u>	<u>6.55</u>	262	6.51
648.exchange2_s	16	<u>112</u>	<u>26.3</u>	112	26.3	112	26.3	16	<u>112</u>	<u>26.3</u>	112	26.3	112	26.3
657.xz_s	16	216	28.6	<u>214</u>	<u>28.9</u>	214	28.9	16	216	28.6	<u>214</u>	<u>28.9</u>	214	28.9

SPECspeed®2017_int_base = **13.9**

SPECspeed®2017_int_peak = **13.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak
runs of 628.pop2_s and 638.imagick_s to enable THP only on request.
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-15"

LD_LIBRARY_PATH =

"/cpu2017/amd_speed_aocc300_milan_B_lib/64;/cpu2017/amd_speed_aocc300_mi
lan_B_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

cTDP = 280

Determinism Slider set to Power

SMT set to disable

IOMMU set to enable

Package Power Limit set to 280

NUMA nodes per socket set to NPS4

Sysinfo program /cpu2017/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on test Fri Feb 26 17:00:34 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 72F3 8-Core Processor

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 16

Vendor ID: AuthenticAMD

CPU family: 25

Model: 1

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECspeed®2017_int_base = 13.9

R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Mar-2021

Platform Notes (Continued)

```

Model name: AMD EPYC 72F3 8-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 4007.842
CPU max MHz: 3700.0000
CPU min MHz: 1500.0000
BogoMIPS: 7400.23
Virtualization: AMD-V
L1d cache: 512 KiB
L1i cache: 512 KiB
L2 cache: 8 MiB
L3 cache: 512 MiB
NUMA node0 CPU(s): 0
NUMA node1 CPU(s): 1
NUMA node2 CPU(s): 2
NUMA node3 CPU(s): 3
NUMA node4 CPU(s): 4
NUMA node5 CPU(s): 5
NUMA node6 CPU(s): 6
NUMA node7 CPU(s): 7
NUMA node8 CPU(s): 8
NUMA node9 CPU(s): 9
NUMA node10 CPU(s): 10
NUMA node11 CPU(s): 11
NUMA node12 CPU(s): 12
NUMA node13 CPU(s): 13
NUMA node14 CPU(s): 14
NUMA node15 CPU(s): 15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECspeed®2017_int_base = 13.9

R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Mar-2021

Platform Notes (Continued)

ibpb stibp vmcall fsgsbase bml avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpcplmulqdq rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0
node 0 size: 64328 MB
node 0 free: 64228 MB
node 1 cpus: 1
node 1 size: 64509 MB
node 1 free: 64452 MB
node 2 cpus: 2
node 2 size: 64511 MB
node 2 free: 64457 MB
node 3 cpus: 3
node 3 size: 64510 MB
node 3 free: 64452 MB
node 4 cpus: 4
node 4 size: 64511 MB
node 4 free: 64465 MB
node 5 cpus: 5
node 5 size: 64510 MB
node 5 free: 64440 MB
node 6 cpus: 6
node 6 size: 64511 MB
node 6 free: 64383 MB
node 7 cpus: 7
node 7 size: 64474 MB
node 7 free: 64313 MB
node 8 cpus: 8
node 8 size: 64511 MB
node 8 free: 64454 MB
node 9 cpus: 9
node 9 size: 64510 MB
node 9 free: 64452 MB
node 10 cpus: 10
node 10 size: 64511 MB
node 10 free: 64454 MB
node 11 cpus: 11
node 11 size: 64510 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECspeed®2017_int_base = 13.9

R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Mar-2021

Platform Notes (Continued)

```

node 11 free: 64463 MB
node 12 cpus: 12
node 12 size: 64511 MB
node 12 free: 64470 MB
node 13 cpus: 13
node 13 size: 64510 MB
node 13 free: 64471 MB
node 14 cpus: 14
node 14 size: 64511 MB
node 14 free: 64469 MB
node 15 cpus: 15
node 15 size: 64510 MB
node 15 free: 64453 MB
node distances:

```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

```

MemTotal:      1056723160 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS

```

From /etc/*release* /etc/*version*

```

debian_version: bullseye/sid
os-release:
NAME="Ubuntu"

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
VERSION="20.04.1 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux test 5.4.0-65-generic #73-Ubuntu SMP Mon Jan 18 17:25:17 UTC 2021 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 Feb 26 16:57
```

```
SPEC is set to: /cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb2 ext4 1.8T 18G 1.7T 2% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: GIGABYTE
Product: R282-Z90-00
Product Family: Server
Serial: 1234567890abcdefghijkl
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

16x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200
16x Unknown Unknown

BIOS:

BIOS Vendor: GIGABYTE
BIOS Version: M02
BIOS Date: 02/01/2021
BIOS Revision: 5.21

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
C++ | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
Fortran | 648.exchange2_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: Same as 600.perlbench_s

625.x264_s: basepeak = yes

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R282-Z90
(AMD EPYC 72F3 , 3.70GHz)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-26 12:00:34-0500.
Report generated on 2021-03-16 15:27:04 by CPU2017 PDF formatter v6255.
Originally published on 2021-03-16.