



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

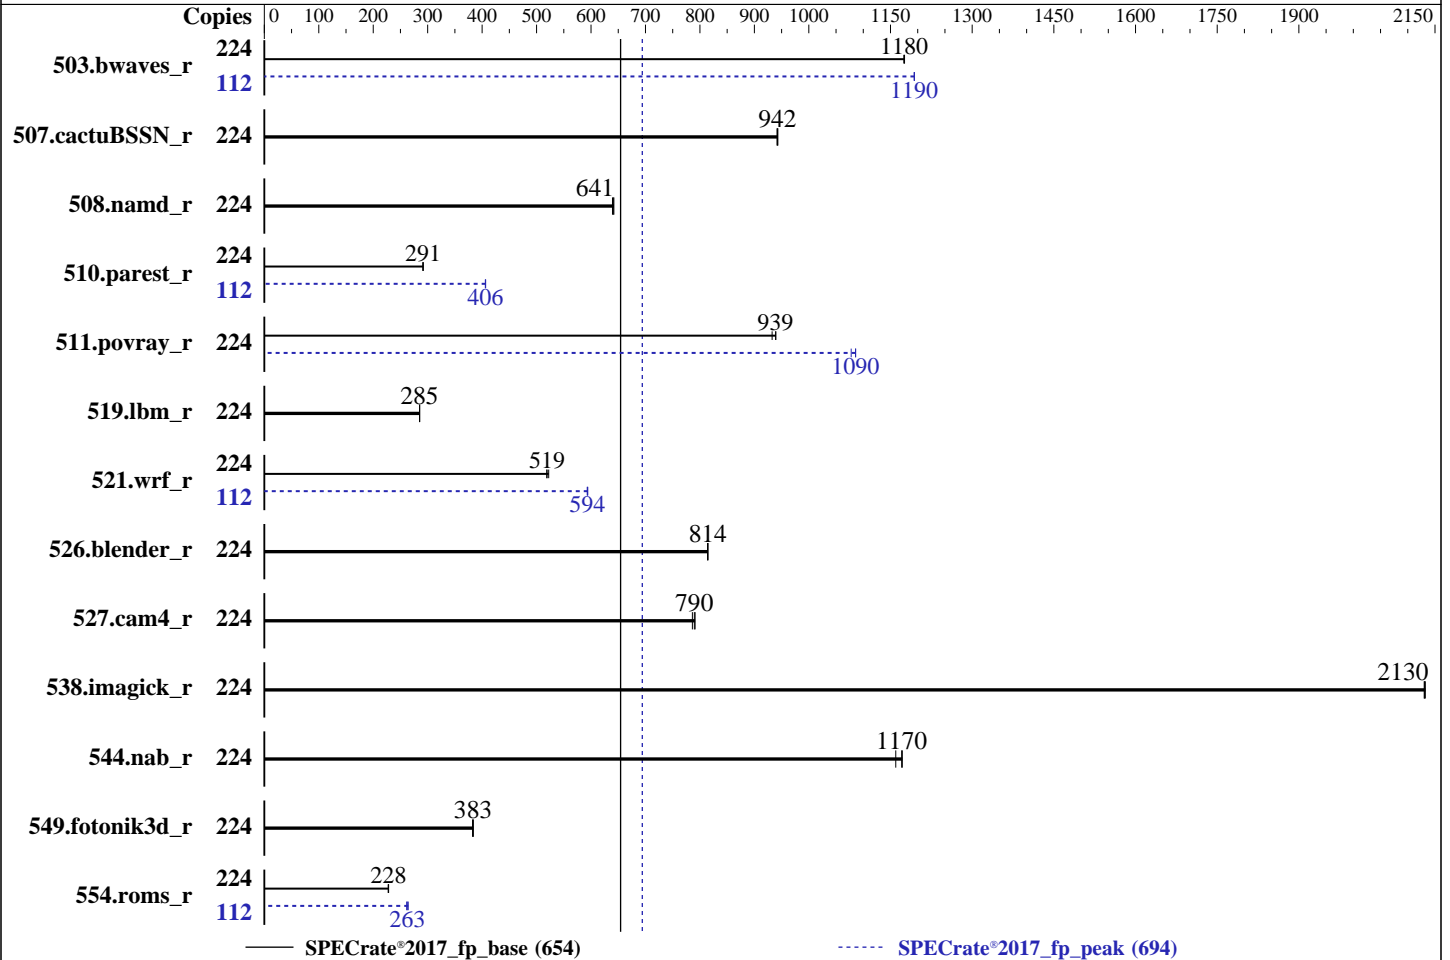

Hardware

CPU Name: Intel Xeon Platinum 8380H
 Max MHz: 4300
 Nominal: 2900
 Enabled: 112 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200V-R)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 4.09.08 released Sep-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	1910	1180	1912	1170	<u>1912</u>	<u>1180</u>	112	941	1190	941	1190	<u>941</u>	<u>1190</u>
507.cactuBSSN_r	224	301	943	<u>301</u>	<u>942</u>	301	942	224	301	943	<u>301</u>	<u>942</u>	301	942
508.namd_r	224	331	642	333	639	<u>332</u>	<u>641</u>	224	331	642	333	639	<u>332</u>	<u>641</u>
510.parest_r	224	2011	291	2008	292	<u>2010</u>	<u>291</u>	112	722	406	<u>722</u>	<u>406</u>	721	406
511.povray_r	224	557	939	<u>557</u>	<u>939</u>	561	933	224	485	1080	<u>482</u>	<u>1090</u>	482	1090
519.lbm_r	224	828	285	<u>828</u>	<u>285</u>	827	285	224	828	285	<u>828</u>	<u>285</u>	827	285
521.wrf_r	224	<u>966</u>	<u>519</u>	961	522	967	519	112	423	593	422	594	<u>423</u>	<u>594</u>
526.blender_r	224	419	814	419	815	<u>419</u>	<u>814</u>	224	419	814	419	815	<u>419</u>	<u>814</u>
527.cam4_r	224	495	791	<u>496</u>	<u>790</u>	498	786	224	495	791	<u>496</u>	<u>790</u>	498	786
538.imagick_r	224	<u>261</u>	<u>2130</u>	262	2130	261	2130	224	<u>261</u>	<u>2130</u>	262	2130	261	2130
544.nab_r	224	322	1170	<u>322</u>	<u>1170</u>	325	1160	224	322	1170	<u>322</u>	<u>1170</u>	325	1160
549.fotonik3d_r	224	<u>2277</u>	<u>383</u>	2275	384	2283	382	224	<u>2277</u>	<u>383</u>	2275	384	2283	382
554.roms_r	224	<u>1562</u>	<u>228</u>	1564	228	1559	228	112	673	264	681	261	<u>678</u>	<u>263</u>

SPECrate®2017_fp_base = **654**

SPECrate®2017_fp_peak = **694**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU207/lib/intel64:/home/CPU207/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

CLE Support set to Disable

Sub NUMA Cluster (SNC) set to Enable

Intel Hyper Threading Technology set to Enable

Sysinfo program /home/CPU207/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Sat Jan 23 16:07:27 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380H CPU @ 2.90GHz

4 "physical id"s (chips)

224 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Platform Notes (Continued)

```

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:  0-223
Thread(s) per core:    2
Core(s) per socket:   28
Socket(s):             4
NUMA node(s):         8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Platinum 8380H CPU @ 2.90GHz
Stepping:              11
CPU MHz:               3432.538
CPU max MHz:           4300.0000
CPU min MHz:           1000.0000
BogoMIPS:              5800.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s):    56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s):    60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s):    84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s):    88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Platform Notes (Continued)

cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 192067 MB
node 0 free: 177299 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
132 136 137 138 139
node 1 size: 193529 MB
node 1 free: 182916 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 193502 MB
node 2 free: 182901 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 193529 MB
node 3 free: 182930 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 193529 MB
node 4 free: 182906 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 193529 MB
node 5 free: 182860 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 193529 MB
node 6 free: 182913 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 193527 MB
node 7 free: 182929 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 11 20 20 20 20 20 20
  1:  11 10 20 20 20 20 20 20
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Platform Notes (Continued)

```

2: 20 20 10 11 20 20 20 20
3: 20 20 11 10 20 20 20 20
4: 20 20 20 20 10 11 20 20
5: 20 20 20 20 11 10 20 20
6: 20 20 20 20 20 20 10 11
7: 20 20 20 20 20 20 11 10

```

From /proc/meminfo

```

MemTotal:      1583867708 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: hpc-compute

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```

os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Jan-2021
Hardware Availability: Sep-2020
Software Availability: Aug-2020

Platform Notes (Continued)

barriers and __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
 CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jan 23 07:58

SPEC is set to: /home/CPU207

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	876G	145G	731G	17%	/home

From /sys/devices/virtual/dmi/id

Vendor: Inspur
 Product: NF8480M6
 Product Family: Family
 Serial: 379953176

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:
 BIOS Vendor: American Megatrends Inc.
 BIOS Version: 4.09.08
 BIOS Date: 09/12/2020
 BIOS Revision: 5.19

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Compiler Version Notes (Continued)

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Compiler Version Notes (Continued)

Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.2.275 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-ljemalloc

Benchmarks using both C and C++:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 654

Inspur NF8480M6 (Intel Xeon Platinum 8380H)

SPECrate®2017_fp_peak = 694

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jan-2021

Hardware Availability: Sep-2020

Software Availability: Aug-2020

Peak Optimization Flags (Continued)

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-01-23 16:07:27-0500.

Report generated on 2021-03-30 15:32:09 by CPU2017 PDF formatter v6442.

Originally published on 2021-03-30.