



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Jun-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

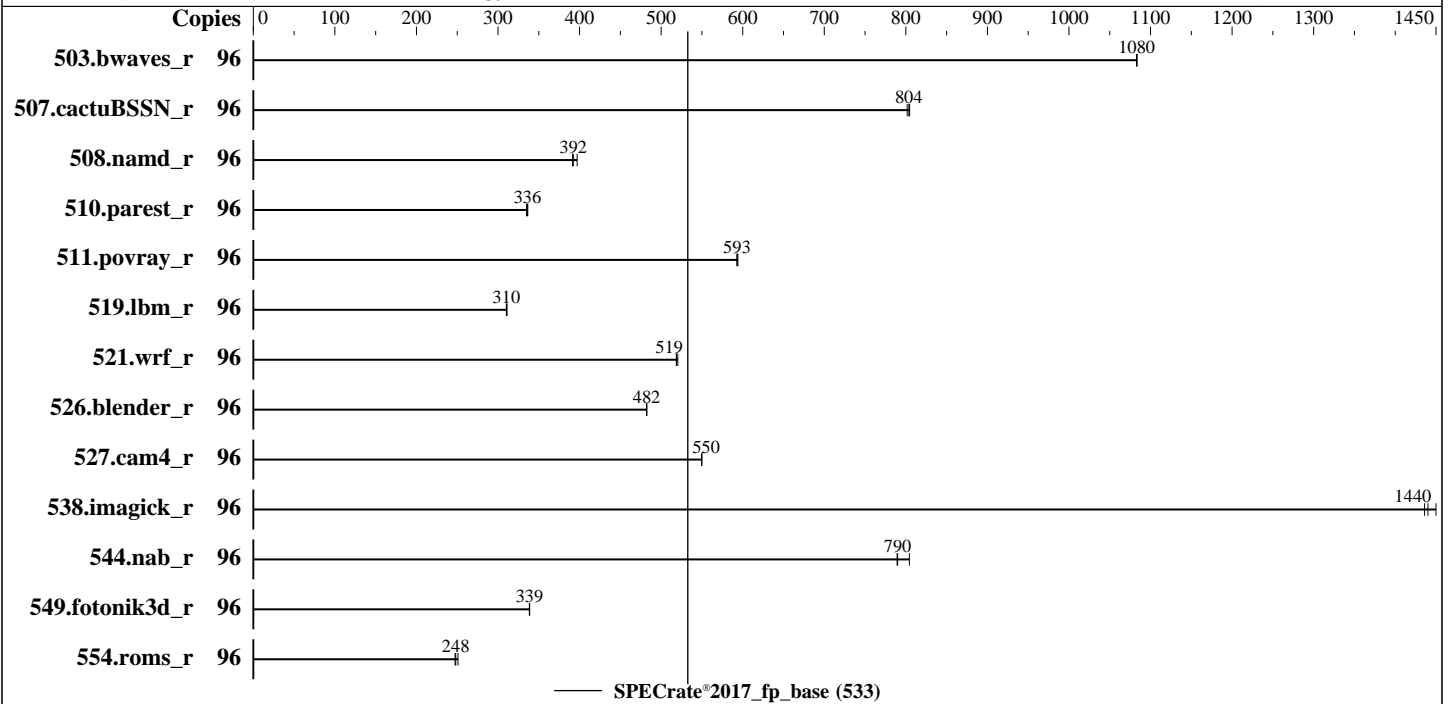

### Hardware

CPU Name: Intel Xeon Gold 6330H  
 Max MHz: 3700  
 Nominal: 2000  
 Enabled: 96 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version M5E111G 1.20 released Apr-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jun-2021  
Hardware Availability: Nov-2020  
Software Availability: Dec-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	889	1080	<b><u>889</u></b>	<b><u>1080</u></b>	889	1080							
507.cactuBSSN_r	96	<b><u>151</u></b>	<b><u>804</u></b>	152	802	151	805							
508.namd_r	96	<b><u>232</u></b>	<b><u>392</u></b>	233	391	230	397							
510.parest_r	96	747	336	<b><u>747</u></b>	<b><u>336</u></b>	750	335							
511.povray_r	96	<b><u>378</u></b>	<b><u>593</u></b>	378	593	377	594							
519.lbm_r	96	325	311	<b><u>326</u></b>	<b><u>310</u></b>	326	310							
521.wrf_r	96	415	519	<b><u>414</u></b>	<b><u>519</u></b>	413	520							
526.blender_r	96	303	482	303	483	<b><u>303</u></b>	<b><u>482</u></b>							
527.cam4_r	96	<b><u>305</u></b>	<b><u>550</u></b>	306	550	305	550							
538.imagick_r	96	165	1450	<b><u>166</u></b>	<b><u>1440</u></b>	166	1440							
544.nab_r	96	<b><u>205</u></b>	<b><u>790</u></b>	201	804	205	789							
549.fotonik3d_r	96	1104	339	1106	338	<b><u>1105</u></b>	<b><u>339</u></b>							
554.roms_r	96	617	247	<b><u>615</u></b>	<b><u>248</u></b>	608	251							

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jun-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

### General Notes (Continued)

```
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

### Platform Notes

BIOS configuration:

```
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
Hyper-Threading set to Disabled
SNC set to Enabled
Stale Atos set to Enable
```

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu Jun 24 23:34:40 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6330H CPU @ 2.00GHz
 4 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    1
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Gold 6330H CPU @ 2.00GHz
Stepping:               11
CPU MHz:                1688.284
CPU max MHz:           3700.0000
CPU min MHz:           1000.0000
BogoMIPS:              4000.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               33792K
NUMA node0 CPU(s):     0-2,6-8,12-14,18-20
NUMA node1 CPU(s):     3-5,9-11,15-17,21-23
NUMA node2 CPU(s):     24-26,30-32,36-38,42-44
NUMA node3 CPU(s):     27-29,33-35,39-41,45-47
NUMA node4 CPU(s):     48-50,54-56,60-62,66-68
NUMA node5 CPU(s):     51-53,57-59,63-65,69-71
NUMA node6 CPU(s):     72-74,78-80,84-86,90-92
NUMA node7 CPU(s):     75-77,81-83,87-89,93-95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms
invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke
avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20
  node 0 size: 188826 MB
  node 0 free: 192851 MB
  node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23
  node 1 size: 189320 MB
  node 1 free: 193373 MB
  node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44
  node 2 size: 189212 MB
  node 2 free: 188794 MB
  node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47
  node 3 size: 189568 MB
  node 3 free: 193407 MB
  node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68
  node 4 size: 189406 MB
  node 4 free: 193380 MB
  node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71
  node 5 size: 189670 MB
  node 5 free: 193411 MB
  node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92
  node 6 size: 189618 MB
  node 6 free: 191389 MB
  node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95
  node 7 size: 189448 MB
  node 7 free: 190453 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  20  20  20  20  20  20
    1:  11  10  20  20  20  20  20  20
    2:  20  20  10  11  20  20  20  20
    3:  20  20  11  10  20  20  20  20
    4:  20  20  20  20  10  11  20  20
    5:  20  20  20  20  11  10  20  20
    6:  20  20  20  20  20  20  10  11
    7:  20  20  20  20  20  20  11  10

```

```

From /proc/meminfo
MemTotal:      1584962676 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Nov-2020  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.3"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Jun 24 23:30

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	819G	45G	774G	6%	/home

From /sys/devices/virtual/dmi/id

Vendor: Lenovo

Product: ThinkSystem SR850 V2

Product Family: ThinkSystem

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Nov-2020  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

Serial: none

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

**Memory:**

48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

**BIOS:**

BIOS Vendor: Lenovo  
BIOS Version: M5E111G-1.20  
BIOS Date: 04/28/2021  
BIOS Revision: 1.20  
Firmware Revision: 1.30

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Nov-2020  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Nov-2020

Software Availability: Dec-2020

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 533

ThinkSystem SR850 V2  
(2.00 GHz, Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jun-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-B.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-B.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-06-24 11:34:39-0400.

Report generated on 2021-07-21 15:44:14 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-20.