



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

## SPECrate®2017\_fp\_base = 335

## SPECrate®2017\_fp\_peak = 347

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

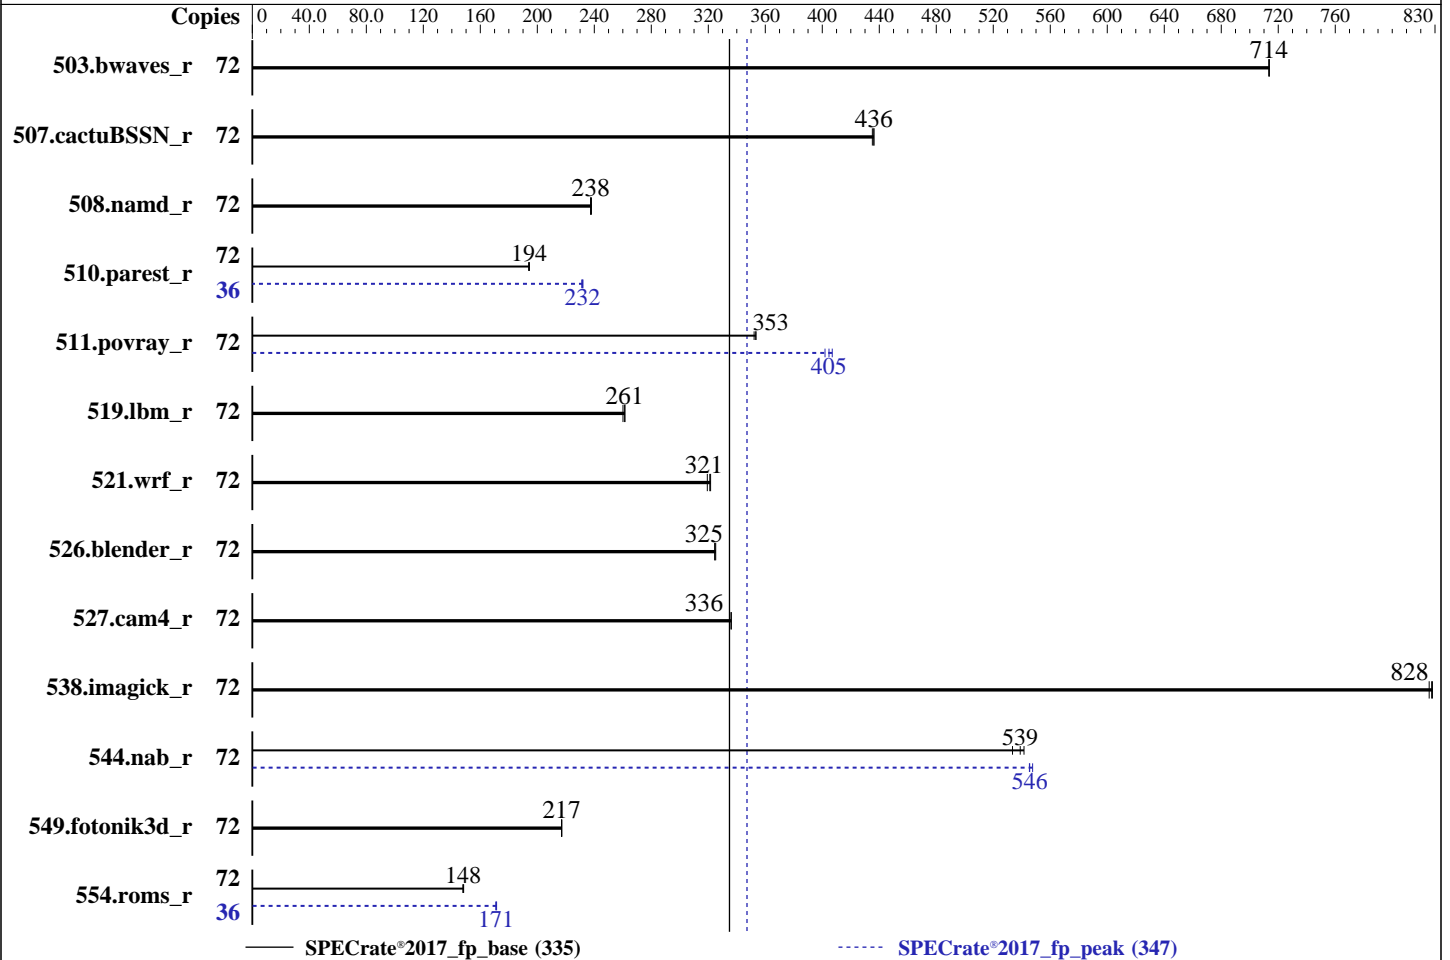

### Hardware

CPU Name: Intel Xeon Gold 6354  
 Max MHz: 3600  
 Nominal: 3000  
 Enabled: 36 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 39 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 800 GB SAS SSD, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U46 v1.42 05/26/2021 released May-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 (Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jul-2021  
Hardware Availability: Jun-2021  
Software Availability: Dec-2020

## Software (Continued)

Power Management: BIOS set to prefer performance at the cost of additional power usage

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	<b>1012</b>	<b>714</b>	1012	713	1012	714	72	<b>1012</b>	<b>714</b>	1012	713	1012	714
507.cactuBSSN_r	72	209	436	<b>209</b>	<b>436</b>	209	435	72	209	436	<b>209</b>	<b>436</b>	209	435
508.namd_r	72	288	237	<b>288</b>	<b>238</b>	287	238	72	288	237	<b>288</b>	<b>238</b>	287	238
510.parest_r	72	971	194	969	194	<b>970</b>	<b>194</b>	36	407	231	<b>406</b>	<b>232</b>	406	232
511.povray_r	72	476	353	477	352	<b>476</b>	<b>353</b>	72	418	402	413	407	<b>415</b>	<b>405</b>
519.lbm_r	72	292	260	290	262	<b>290</b>	<b>261</b>	72	292	260	290	262	<b>290</b>	<b>261</b>
521.wrf_r	72	<b>502</b>	<b>321</b>	505	319	501	322	72	<b>502</b>	<b>321</b>	505	319	501	322
526.blender_r	72	<b>338</b>	<b>325</b>	337	325	338	325	72	<b>338</b>	<b>325</b>	337	325	338	325
527.cam4_r	72	375	336	376	335	<b>375</b>	<b>336</b>	72	375	336	376	335	<b>375</b>	<b>336</b>
538.imagick_r	72	216	828	217	826	<b>216</b>	<b>828</b>	72	216	828	217	826	<b>216</b>	<b>828</b>
544.nab_r	72	224	542	<b>225</b>	<b>539</b>	227	534	72	222	545	<b>222</b>	<b>546</b>	221	548
549.fotonik3d_r	72	1292	217	<b>1292</b>	<b>217</b>	1293	217	72	1292	217	<b>1292</b>	<b>217</b>	1293	217
554.roms_r	72	771	148	<b>773</b>	<b>148</b>	774	148	36	334	171	335	171	<b>334</b>	<b>171</b>

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(3.00 GHz, Intel Xeon Gold 6354)

**SPECrate®2017\_fp\_base = 335**

**SPECrate®2017\_fp\_peak = 347**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Submitted\_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>

Submitted: Mon Aug 2 07:58:46 EDT 2021

Submission: cpu2017-20210802-28533.sub

## Platform Notes

The system ROM used for this result contains Intel microcode version 0xd0002a0 for the Intel Xeon Gold 6354 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute  
Memory Patrol Scrubbing set to Disabled  
Advanced Memory Protection set to Advanced ECC  
Last Level Cache (LLC) Prefetch set to Enabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Enhanced Processor Performance set to Enabled  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom  
DCU Stream Prefetcher set to Disabled  
XPT Remote Prefetcher set to Enabled  
Energy/Performance Bias set to Balanced Performance

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Fri Jul 16 10:40:15 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6354 CPU @ 3.00GHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(3.00 GHz, Intel Xeon Gold 6354)

**SPECrate®2017\_fp\_base = 335**

**SPECrate®2017\_fp\_peak = 347**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Platform Notes (Continued)

2 "physical id"s (chips)  
72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 72
On-line CPU(s) list:   0-71
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Gold 6354 CPU @ 3.00GHz
Stepping:               6
CPU MHz:                2751.694
BogoMIPS:               6000.00
Virtualization:        VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:                1280K
L3 cache:                39936K
NUMA node0 CPU(s):     0-8,36-44
NUMA node1 CPU(s):     9-17,45-53
NUMA node2 CPU(s):     18-26,54-62
NUMA node3 CPU(s):     27-35,63-71
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(3.00 GHz, Intel Xeon Gold 6354)

**SPECrate®2017\_fp\_base = 335**

**SPECrate®2017\_fp\_peak = 347**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Dec-2020

## Platform Notes (Continued)

avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 39936 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 36 37 38 39 40 41 42 43 44

node 0 size: 505501 MB

node 0 free: 515411 MB

node 1 cpus: 9 10 11 12 13 14 15 16 17 45 46 47 48 49 50 51 52 53

node 1 size: 505889 MB

node 1 free: 515705 MB

node 2 cpus: 18 19 20 21 22 23 24 25 26 54 55 56 57 58 59 60 61 62

node 2 size: 505973 MB

node 2 free: 515642 MB

node 3 cpus: 27 28 29 30 31 32 33 34 35 63 64 65 66 67 68 69 70 71

node 3 size: 505851 MB

node 3 free: 515769 MB

node distances:

```
node  0  1  2  3
0:   10  20  30  30
1:   20  10  30  30
2:   30  30  10  20
3:   30  30  20  10
```

From /proc/meminfo

MemTotal: 2113486452 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.3"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(3.00 GHz, Intel Xeon Gold 6354)

**SPECrate®2017\_fp\_base = 335**

**SPECrate®2017\_fp\_peak = 347**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 16 10:39

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel00-home	xf	670G	124G	546G	19%	/home

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL360 Gen10 Plus
Product Family:	ProLiant
Serial:	CN701108CK

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200

BIOS:

BIOS Vendor:	HPE
BIOS Version:	U46
BIOS Date:	05/26/2021
BIOS Revision:	1.42

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Platform Notes (Continued)

Firmware Revision: 2.50

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C                | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                  | 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++              | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C          | 511.povray_r(peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

C++, C | 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(3.00 GHz, Intel Xeon Gold 6354)

**SPECrate®2017\_fp\_base = 335**

**SPECrate®2017\_fp\_peak = 347**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## Peak Optimization Flags (Continued)

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(3.00 GHz, Intel Xeon Gold 6354)

SPECrate®2017\_fp\_base = 335

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-16 01:10:15-0400.

Report generated on 2021-08-19 10:52:35 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.