



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

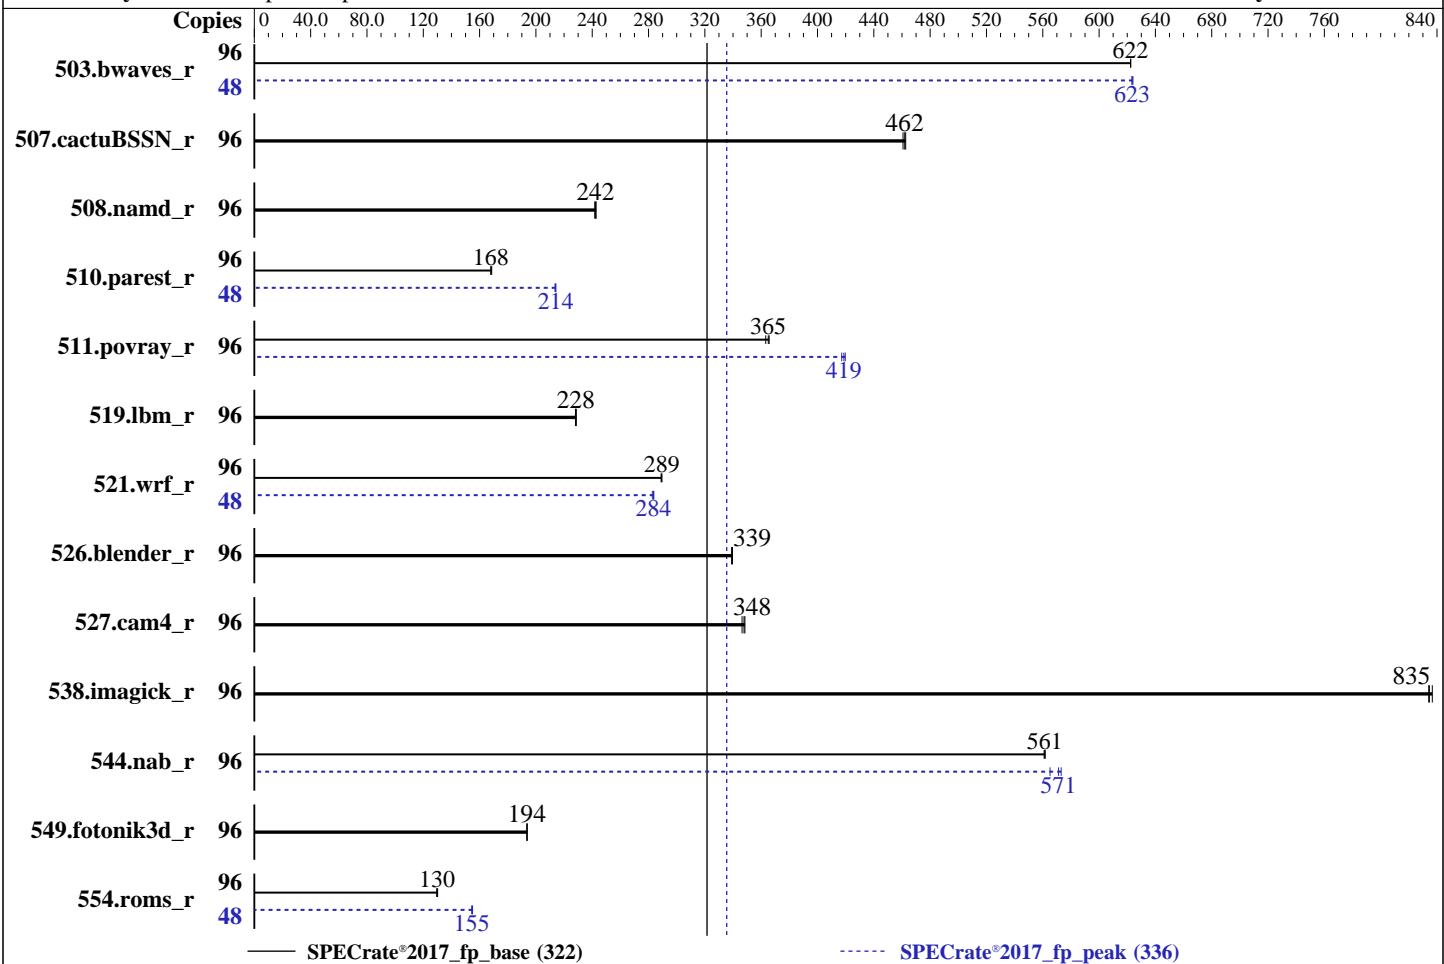

Hardware

CPU Name: Intel Xeon Gold 5318N
 Max MHz: 3400
 Nominal: 2100
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 4 TB NVME SSD
 Other: None

OS:

Red Hat Enterprise Linux release 8.2 (Ootpa)
4.18.0-193.el8.x86_64

Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux

Parallel:

No

Firmware:

Version 05.00.00 released Apr-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1547	622	1547	622	1547	622	48	772	623	771	624	772	623
507.cactusBSSN_r	96	263	462	263	463	264	461	96	263	462	263	463	264	461
508.namd_r	96	377	242	376	243	376	242	96	377	242	376	243	376	242
510.parest_r	96	1495	168	1495	168	1489	169	48	587	214	587	214	588	214
511.povray_r	96	617	363	614	365	613	366	96	534	420	537	417	535	419
519.lbm_r	96	442	229	443	228	444	228	96	442	229	443	228	444	228
521.wrf_r	96	743	289	744	289	743	289	48	379	284	379	284	380	283
526.blender_r	96	431	340	431	339	431	339	96	431	340	431	339	431	339
527.cam4_r	96	483	348	482	348	485	346	96	483	348	482	348	485	346
538.imagick_r	96	285	837	286	834	286	835	96	285	837	286	834	286	835
544.nab_r	96	288	562	288	561	288	561	96	286	565	282	573	283	571
549.fotonik3d_r	96	1931	194	1932	194	1932	194	96	1931	194	1932	194	1932	194
554.roms_r	96	1172	130	1177	130	1175	130	48	492	155	494	155	493	155

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
Malloc_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

Sub NUMA Cluster (SNC) set to Enable

Intel Hyper Threading Technology set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

```
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Wed Jul 21 20:45:05 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5318N CPU @ 2.10GHz
```

```
 2 "physical id"s (chips)
```

```
 96 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
  cpu cores : 24
```

```
  siblings : 48
```

```
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

```
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Platform Notes (Continued)

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Gold 5318N CPU @ 2.10GHz
Stepping:               6
CPU MHz:               2700.000
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              36864K
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Flags:     fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpf perf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities
```

/proc/cpuinfo cache data
cache size : 36864 KB

From numactl --hardware

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 322

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 257637 MB
node 0 free: 245303 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71
node 1 size: 258042 MB
node 1 free: 248151 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 258015 MB
node 2 free: 248038 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 258040 MB
node 3 free: 248183 MB
node distances:
node   0   1   2   3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10
```

From /proc/meminfo

```
MemTotal:      1056496704 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

uname -a:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Platform Notes (Continued)

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 21 12:40

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	3.6T	98G	3.5T	3%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF5280M6
Product Family:	Family
Serial:	380251214

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron 36ASF4G72PZ-3G2R1 32 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	05.00.00
BIOS Date:	04/25/2021
BIOS Revision:	5.22

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 322

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)

64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M6 (Intel Xeon Gold 5318N)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 322

SPECrate®2017_fp_peak = 336

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf_r: ifort icc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 322

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

527.cam4_r: ifort icx

Benchmarks using both C and C++:

511.povray_r: icpcicc

526.blender_r: icpxicx

Benchmarks using Fortran, C, and C++:

icpxicxifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -festo
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-festo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 322

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.0.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.0.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 322

Inspur NF5280M6 (Intel Xeon Gold 5318N)

SPECrate®2017_fp_peak = 336

CPU2017 License: 3358

Test Date: Jul-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-21 20:45:05-0400.

Report generated on 2021-08-19 10:54:37 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.