



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

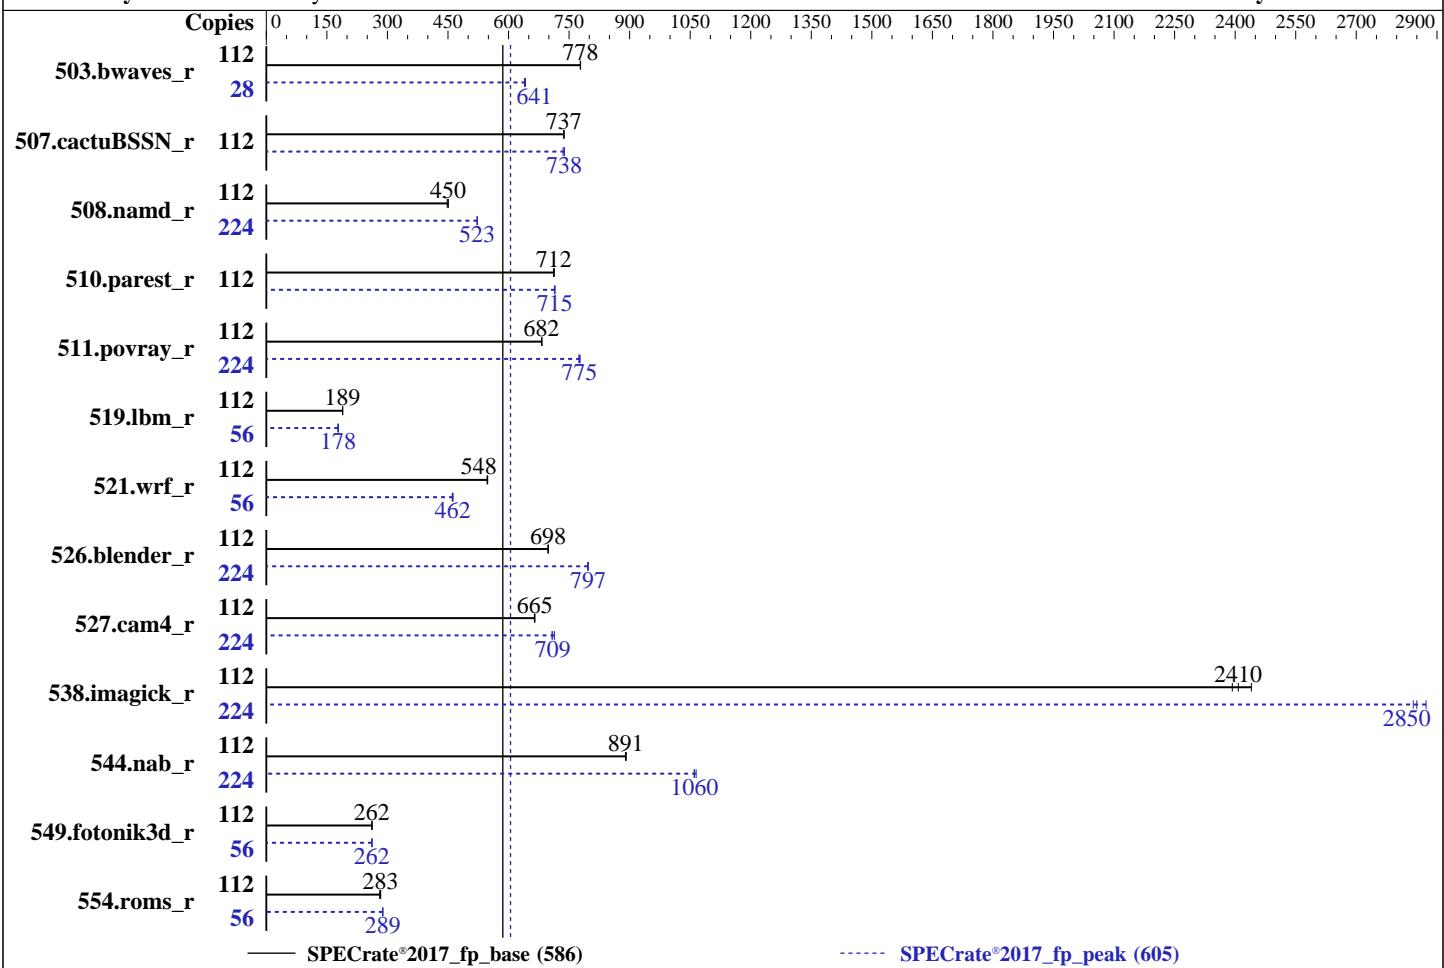

— Specrate®2017\_fp\_base (586)

----- Specrate®2017\_fp\_peak (605)

### Hardware

CPU Name: AMD EPYC 7663  
 Max MHz: 3500  
 Nominal: 2000  
 Enabled: 112 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 7 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### OS:

SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 kernel version  
 5.3.18-22-default

### Compiler:

C/C++/Fortran: Version 3.0.0 of AOCC

### Parallel:

No

### Firmware:

Version 4.2.200.3 released May-2021

### File System:

btrfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

jemalloc: jemalloc memory allocator library v5.1.0

### Power Management:

BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	1443	778	1444	778	<b>1444</b>	<b>778</b>	28	<b>438</b>	<b>641</b>	437	642	439	639
507.cactuBSSN_r	112	<b>192</b>	<b>737</b>	192	737	192	737	112	<b>192</b>	<b>738</b>	193	735	192	738
508.namd_r	112	238	448	<b>236</b>	<b>450</b>	236	451	224	407	523	<b>407</b>	<b>523</b>	408	522
510.parest_r	112	411	713	<b>411</b>	<b>712</b>	412	711	112	411	714	<b>410</b>	<b>715</b>	410	715
511.povray_r	112	383	683	<b>383</b>	<b>682</b>	384	682	224	<b>675</b>	<b>775</b>	673	777	675	774
519.lbm_r	112	625	189	<b>625</b>	<b>189</b>	625	189	56	333	177	<b>332</b>	<b>178</b>	331	178
521.wrf_r	112	458	548	<b>458</b>	<b>548</b>	459	547	56	<b>272</b>	<b>462</b>	271	463	272	460
526.blender_r	112	244	699	244	698	<b>244</b>	<b>698</b>	224	428	796	428	797	<b>428</b>	<b>797</b>
527.cam4_r	112	295	665	<b>295</b>	<b>665</b>	295	664	224	554	708	<b>552</b>	<b>709</b>	549	714
538.imagick_r	112	116	2390	<b>116</b>	<b>2410</b>	114	2440	224	196	2840	<b>195</b>	<b>2850</b>	194	2870
544.nab_r	112	212	890	212	891	<b>212</b>	<b>891</b>	224	356	1060	<b>355</b>	<b>1060</b>	354	1060
549.fotonik3d_r	112	<b>1668</b>	<b>262</b>	1667	262	1668	262	56	835	261	<b>834</b>	<b>262</b>	834	262
554.roms_r	112	634	281	629	283	<b>629</b>	<b>283</b>	56	<b>308</b>	<b>289</b>	309	288	308	289

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Date:** Jul-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Mar-2021

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/home/cpu2017/amd_rate_a
    occ300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration

SMT Mode set to Auto

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

cTDP Control set to Manual

cTDP set to 280

EDC Control set to Manual

EDC set to 300

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Date:** Jul-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Mar-2021

## Platform Notes (Continued)

L2 Stream HW Prefetcher set to Disabled

Memory Interleaving set to Disabled

APBDIS set to 1

xGMI Link config set to 4

4-link xGMI Max Speed set to 18Gbp

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on localhost Fri Jul 23 12:11:43 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7663 56-Core Processor
  2 "physical id"s (chips)
  224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 56
  siblings : 112
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
  60 61 62
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
  60 61 62
```

From lscpu from util-linux 2.33.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                224
On-line CPU(s) list:  0-223
Thread(s) per core:   2
Core(s) per socket:   56
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7663 56-Core Processor
Stepping:               1
CPU MHz:                2716.455
CPU max MHz:           2000.0000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Platform Notes (Continued)

CPU min MHz: 1500.0000  
BogoMIPS: 3992.52  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 32768K  
NUMA node0 CPU(s): 0-6,112-118  
NUMA node1 CPU(s): 7-13,119-125  
NUMA node2 CPU(s): 14-20,126-132  
NUMA node3 CPU(s): 21-27,133-139  
NUMA node4 CPU(s): 28-34,140-146  
NUMA node5 CPU(s): 35-41,147-153  
NUMA node6 CPU(s): 42-48,154-160  
NUMA node7 CPU(s): 49-55,161-167  
NUMA node8 CPU(s): 56-62,168-174  
NUMA node9 CPU(s): 63-69,175-181  
NUMA node10 CPU(s): 70-76,182-188  
NUMA node11 CPU(s): 77-83,189-195  
NUMA node12 CPU(s): 84-90,196-202  
NUMA node13 CPU(s): 91-97,203-209  
NUMA node14 CPU(s): 98-104,210-216  
NUMA node15 CPU(s): 105-111,217-223  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrandlahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 invpcid\_single hw\_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold v\_vmsave\_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware  
WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 16 nodes (0-15)  
node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118  
node 0 size: 128761 MB  
node 0 free: 128188 MB  
node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125  
node 1 size: 129018 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Platform Notes (Continued)

```
node 1 free: 128588 MB
node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
node 2 size: 129020 MB
node 2 free: 128591 MB
node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
node 3 size: 129018 MB
node 3 free: 128584 MB
node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
node 4 size: 129020 MB
node 4 free: 128550 MB
node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
node 5 size: 129018 MB
node 5 free: 128596 MB
node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
node 6 size: 129020 MB
node 6 free: 128579 MB
node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
node 7 size: 129006 MB
node 7 free: 128589 MB
node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
node 8 size: 129020 MB
node 8 free: 128553 MB
node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
node 9 size: 129018 MB
node 9 free: 128583 MB
node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
node 10 size: 128986 MB
node 10 free: 128554 MB
node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
node 11 size: 129018 MB
node 11 free: 128587 MB
node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
node 12 size: 129020 MB
node 12 free: 128549 MB
node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
node 13 size: 129018 MB
node 13 free: 128533 MB
node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
node 14 size: 129020 MB
node 14 free: 128602 MB
node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
node 15 size: 128772 MB
node 15 free: 128348 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 32 32 32 32 32 32 32 32 32
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Date:** Jul-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Mar-2021

## Platform Notes (Continued)

2:	12	12	10	11	12	12	12	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12	12	12	12	12	12
11:	32	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12	12	12	12	12	12
12:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	10	11	12	12	12	12	12	12
13:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	11	10	12	12	12	12	12	12
14:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	12	10	10	11	12	12	12
15:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	12	11	11	10	10	10	10

From /proc/meminfo

```
MemTotal:      2113290236 kB
HugePages_Total:       0
Hugepagesize:        2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS\_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 17 06:12

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc2	btrfs	557G	12G	541G	3%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C245-M6SX
Serial:	WZP25120SVX

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M386AAG40AM3-CWE	128 GB	4 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	C245M6.4.2.200.3.0518212014
BIOS Date:	05/18/2021
BIOS Revision:	5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Date:** Jul-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapi -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-x86-prefetching
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Date:** Jul-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc  
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1  
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs  
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno-  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-lcmm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop  
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm  
-ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-lcim-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

544.nab\_r (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flio  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

510.parest\_r: -m64 -std=c++98 -mno-adx -mno-sse4a

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flio  
-Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flio  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d\_r: Same as 503.bwaves\_r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 605

CPU2017 License: 9019

Test Date: Jul-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive  
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -O3 -ffast-math  
-funroll-loops -mllvm -extra-vectorizer-passes  
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp  
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core Processor)

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamlidb -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamlidb
-ljemalloc -lflang -lflangrti
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7663 64-Core.  
Processor)

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 605**

**Test Date:** Jul-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-23 15:11:43-0400.

Report generated on 2021-08-19 10:57:35 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.