



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation


SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: May-2021
Software Availability: Dec-2020

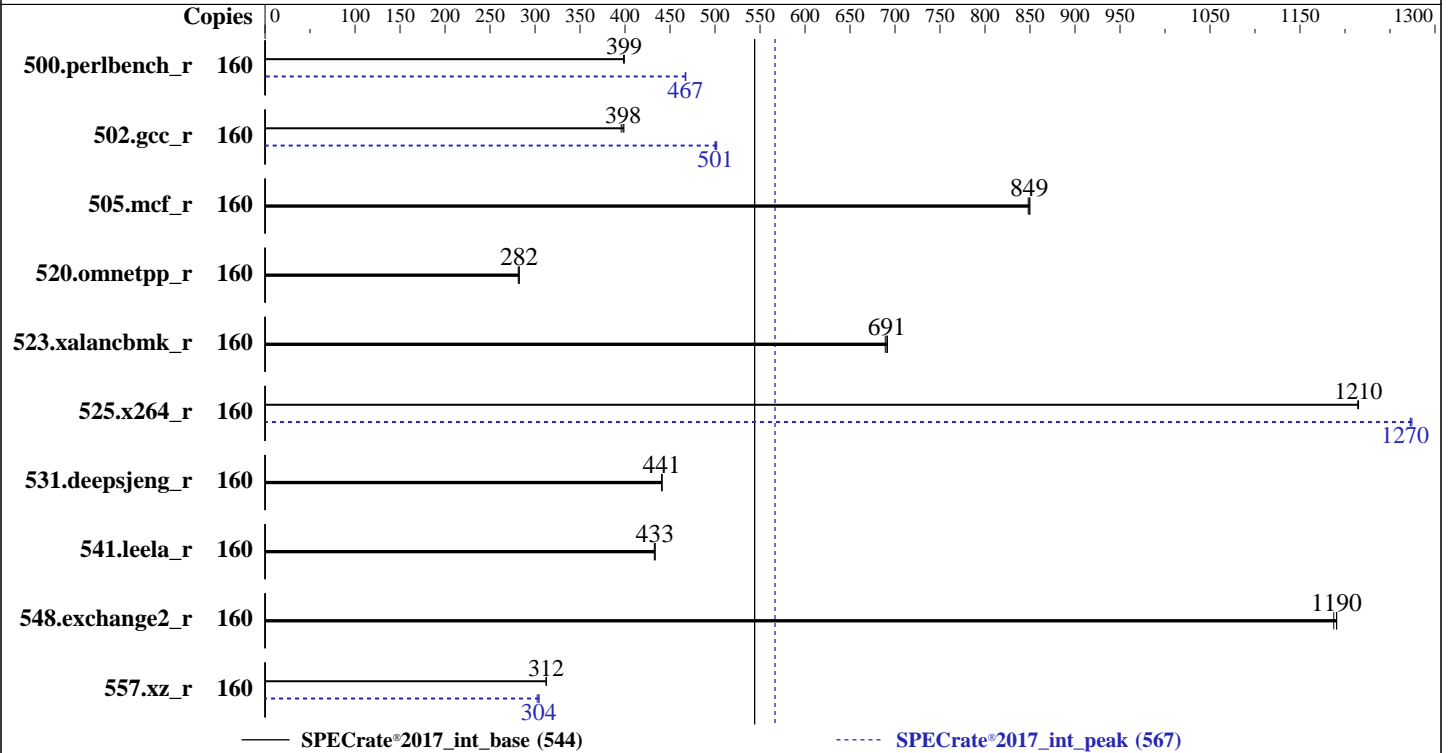

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 4 TB NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel: No
Firmware: Version 05.01.01 released Jul-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	638	399	638	399	640	398	160	546	467	545	467	545	467
502.gcc_r	160	568	399	570	398	572	396	160	451	502	453	501	453	500
505.mcf_r	160	304	849	305	848	304	850	160	304	849	305	848	304	850
520.omnetpp_r	160	743	282	743	282	746	281	160	743	282	743	282	746	281
523.xalancbmk_r	160	244	692	245	691	245	689	160	244	692	245	691	245	689
525.x264_r	160	231	1210	231	1210	231	1220	160	220	1270	220	1270	220	1270
531.deepsjeng_r	160	416	441	416	441	416	441	160	416	441	416	441	416	441
541.leela_r	160	613	433	611	433	611	433	160	613	433	611	433	611	433
548.exchange2_r	160	352	1190	352	1190	353	1190	160	352	1190	352	1190	353	1190
557.xz_r	160	553	312	553	312	553	313	160	572	302	568	304	568	304

SPECrate®2017_int_base = 544

SPECrate®2017_int_peak = 567

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Fri Aug 13 16:14:12 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz

2 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 40

siblings : 80

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: May-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 160
On-line CPU(s) list:   0-159
Thread(s) per core:    2
Core(s) per socket:    40
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:               6
CPU MHz:                3000.000
CPU max MHz:            3400.0000
CPU min MHz:            800.0000
BogoMIPS:               4600.00
Virtualization:         VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               61440K
NUMA node0 CPU(s):     0-19,80-99
NUMA node1 CPU(s):     20-39,100-119
NUMA node2 CPU(s):     40-59,120-139
NUMA node3 CPU(s):     60-79,140-159
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
88 89 90 91 92 93 94 95 96 97 98 99
node 0 size: 257610 MB
node 0 free: 257139 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 1 size: 258039 MB
node 1 free: 257663 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
node 2 size: 258039 MB
node 2 free: 257787 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
node 3 size: 258034 MB
node 3 free: 257754 MB
node distances:
node  0  1  2  3
0:  10  11  20  20
1:  11  10  20  20
2:  20  20  10  11
3:  20  20  11  10

```

```

From /proc/meminfo
MemTotal:      1056484572 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: May-2021
Software Availability: Dec-2020

Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 13 16:11

```
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   3.6T   34G  3.6T   1% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Inspur
Product:         NF5466M6
Product Family:  Family
Serial:          380983478
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Micron 36ASF4G72PZ-3G2R1 32 GB 2 rank 3200

```
BIOS:
BIOS Vendor:     American Megatrends Inc.
BIOS Version:    05.01.01
BIOS Date:       07/09/2021
BIOS Revision:   5.22
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2021
Hardware Availability: May-2021
Software Availability: Dec-2020

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C          | 502.gcc_r(peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 544

Inspur NF5466M6 (Intel Xeon Platinum 8380)

SPECrate®2017_int_peak = 567

CPU2017 License: 3358

Test Date: Aug-2021

Test Sponsor: Inspur Corporation

Hardware Availability: May-2021

Tested by: Inspur Corporation

Software Availability: Dec-2020

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-13 16:14:12-0400.

Report generated on 2021-09-14 19:18:55 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-14.