



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

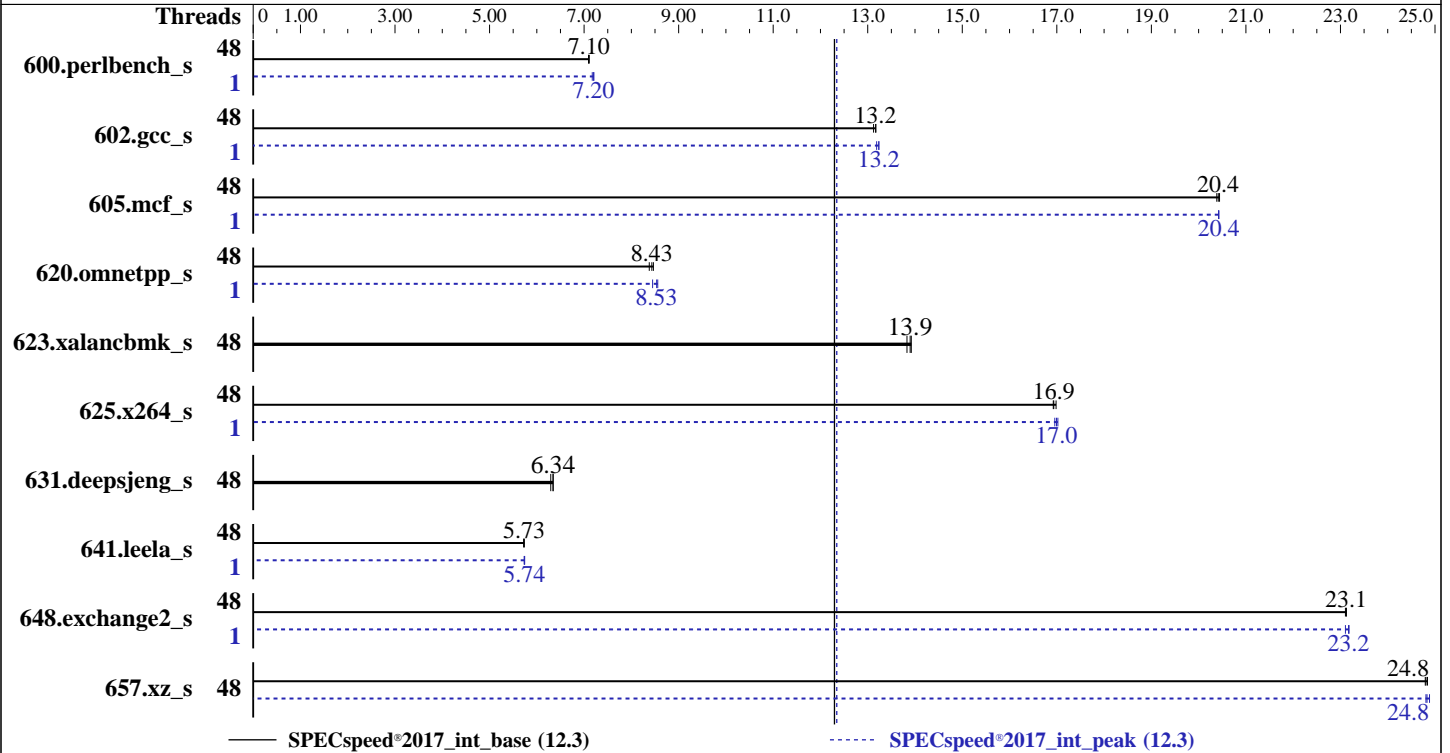

### Hardware

CPU Name: AMD EPYC 7413  
 Max MHz: 3600  
 Nominal: 2650  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 32 MB shared / 6 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 1.6 TB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86\_64)  
 kernel version  
 5.3.18-57-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.2.0.271 released Jul-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	250	7.11	<b><u>250</u></b>	<b><u>7.10</u></b>	250	7.09	1	<b><u>246</u></b>	<b><u>7.20</u></b>	246	7.21	247	7.17
602.gcc_s	48	<b><u>302</u></b>	<b><u>13.2</u></b>	302	13.2	303	13.1	1	302	13.2	301	13.2	<b><u>301</u></b>	<b><u>13.2</u></b>
605.mcf_s	48	231	20.4	<b><u>231</u></b>	<b><u>20.4</u></b>	232	20.4	1	<b><u>231</u></b>	<b><u>20.4</u></b>	231	20.4	231	20.4
620.omnetpp_s	48	193	8.47	195	8.38	<b><u>193</u></b>	<b><u>8.43</u></b>	1	191	8.56	<b><u>191</u></b>	<b><u>8.53</u></b>	193	8.45
623.xalancbmk_s	48	<b><u>102</u></b>	<b><u>13.9</u></b>	102	13.8	102	13.9	48	<b><u>102</u></b>	<b><u>13.9</u></b>	102	13.8	102	13.9
625.x264_s	48	<b><u>104</u></b>	<b><u>16.9</u></b>	104	16.9	104	17.0	1	104	17.0	<b><u>104</u></b>	<b><u>17.0</u></b>	104	17.0
631.deepsjeng_s	48	228	6.29	<b><u>226</u></b>	<b><u>6.34</u></b>	226	6.34	48	228	6.29	<b><u>226</u></b>	<b><u>6.34</u></b>	226	6.34
641.leela_s	48	298	5.72	298	5.73	<b><u>298</u></b>	<b><u>5.73</u></b>	1	297	5.74	<b><u>297</u></b>	<b><u>5.74</u></b>	298	5.73
648.exchange2_s	48	127	23.1	<b><u>127</u></b>	<b><u>23.1</u></b>	127	23.1	1	<b><u>127</u></b>	<b><u>23.2</u></b>	127	23.2	127	23.1
657.xz_s	48	249	24.8	<b><u>249</u></b>	<b><u>24.8</u></b>	249	24.8	48	249	24.8	<b><u>249</u></b>	<b><u>24.8</u></b>	248	24.9

SPECspeed®2017\_int\_base = **12.3**

SPECspeed®2017\_int\_peak = **12.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_speed\_aocc300\_milan\_B\_lib/lib;/home/cpu2017/amd\_speed\_aocc300\_milan\_B\_lib/lib32:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

### Platform Notes

BIOS Configuration

SMT Mode set to Auto

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

cTDP Control set to Manual

cTDP set to 280

EDC Control set to Manual

EDC set to 300

L2 Stream HW Prefetcher set to Disabled

Memory Interleaving set to Disabled

APBDIS set to 1

xGMI Link config set to 4

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost Sun May 2 15:57:22 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7413 24-Core Processor

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### Platform Notes (Continued)

From lscpu from util-linux 2.36.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  1
Model name:             AMD EPYC 7413 24-Core Processor
Stepping:               1
Frequency boost:        enabled
CPU MHz:                2625.094
CPU max MHz:           2650.0000
CPU min MHz:           1500.0000
BogoMIPS:              5289.94
Virtualization:        AMD-V
L1d cache:              1.5 MiB
L1i cache:              1.5 MiB
L2 cache:               24 MiB
L3 cache:               256 MiB
NUMA node0 CPU(s):     0-5,48-53
NUMA node1 CPU(s):     6-11,54-59
NUMA node2 CPU(s):     12-17,60-65
NUMA node3 CPU(s):     18-23,66-71
NUMA node4 CPU(s):     24-29,72-77
NUMA node5 CPU(s):     30-35,78-83
NUMA node6 CPU(s):     36-41,84-89
NUMA node7 CPU(s):     42-47,90-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpelgb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpxt perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 invpcid\_single hw\_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveprtr wbnoinvd amd\_ppin arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca fsrm

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	512K	24M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 257857 MB
node 0 free: 257638 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 258044 MB
node 1 free: 257578 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 258044 MB
node 2 free: 257834 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 245900 MB
node 3 free: 245581 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 258044 MB
node 4 free: 257822 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 258044 MB
node 5 free: 257869 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 258044 MB
node 6 free: 257865 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 258041 MB
node 7 free: 257827 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  11  11  32  32  32  32
  1:  11  10  11  11  32  32  32  32
  2:  11  11  10  11  32  32  32  32
  3:  11  11  11  10  32  32  32  32
  4:  32  32  32  32  10  11  11  11
  5:  32  32  32  32  11  10  11  11
  6:  32  32  32  32  11  11  10  11
  7:  32  32  32  32  11  11  11  10
```

```
From /proc/meminfo
MemTotal:      2101271028 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```

barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 29 05:00

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   1.5T  12G  1.5T   1% /

From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C225-M6N
Serial:          WZP25230TMY

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
  16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200

BIOS:
  BIOS Vendor:    Cisco Systems, Inc.
  BIOS Version:   C225M6.4.2.0.271.0716210621
  BIOS Date:      07/16/2021
  BIOS Revision:  5.22

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
          |
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

```

=====
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
         | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

```

```

=====
Fortran  | 648.exchange2_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Portability Flags (Continued)

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

### C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

### Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang  
-lflangrti

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Optimization Flags (Continued)

C benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7413 64-Core Processor)

SPECspeed®2017\_int\_base = 12.3

SPECspeed®2017\_int\_peak = 12.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-02 18:57:21-0400.

Report generated on 2021-09-29 12:21:03 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-28.