



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_base = 141

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

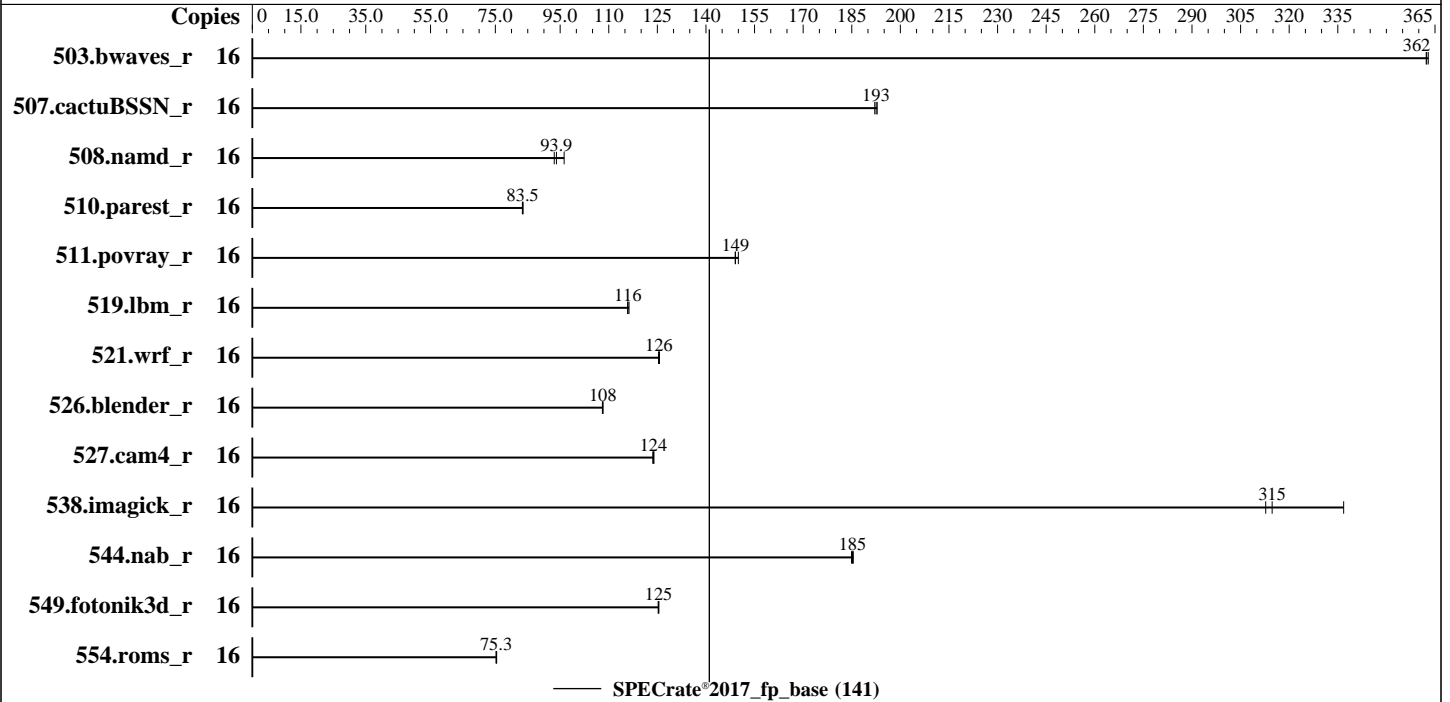

### Hardware

CPU Name: Intel Xeon Silver 4309Y  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version U8E113E 1.10 released Aug-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2021  
Hardware Availability: Jul-2021  
Software Availability: Dec-2020

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	442	363	<b><u>443</u></b>	<b><u>362</u></b>	443	362							
507.cactuBSSN_r	16	105	193	<b><u>105</u></b>	<b><u>193</u></b>	105	192							
508.namd_r	16	158	96.2	<b><u>162</u></b>	<b><u>93.9</u></b>	163	93.2							
510.parest_r	16	501	83.5	<b><u>502</u></b>	<b><u>83.5</u></b>	502	83.3							
511.povray_r	16	249	150	<b><u>251</u></b>	<b><u>149</u></b>	251	149							
519.lbm_r	16	145	116	<b><u>145</u></b>	<b><u>116</u></b>	146	116							
521.wrf_r	16	<b><u>286</u></b>	<b><u>126</u></b>	285	126	286	125							
526.blender_r	16	225	108	<b><u>225</u></b>	<b><u>108</u></b>	226	108							
527.cam4_r	16	226	124	<b><u>226</u></b>	<b><u>124</u></b>	226	124							
538.imagick_r	16	127	313	118	337	<b><u>126</u></b>	<b><u>315</u></b>							
544.nab_r	16	145	185	<b><u>145</u></b>	<b><u>185</u></b>	146	185							
549.fotonik3d_r	16	497	125	498	125	<b><u>497</u></b>	<b><u>125</u></b>							
554.roms_r	16	337	75.4	<b><u>338</u></b>	<b><u>75.3</u></b>	338	75.3							

SPECrate®2017\_fp\_base = 141

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Dec-2020

### General Notes (Continued)

```
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon Sep 6 18:05:04 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
 2 "physical id"s (chips)
16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
Stepping: 6
CPU MHz: 3400.000
BogoMIPS: 5600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 12288K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 sse4_1 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512v1 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 510970 MB
node 0 free: 515101 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 511660 MB
node 1 free: 515386 MB
node distances:
node  0  1
0:  10  20

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

1: 20 10

From /proc/meminfo

MemTotal: 1056499120 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: balanced

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"  
VERSION="8.3 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.3"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"  
ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Sep 6 18:02

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xf	818G	108G	710G	14%	/home

From /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:    ThinkSystem ST650V2
Product Family: ThinkSystem
Serial:     1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2666

BIOS:

```
BIOS Vendor:      Lenovo
BIOS Version:     U8E113E-1.10
BIOS Date:        08/31/2021
BIOS Revision:    1.10
Firmware Revision: 1.41
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 508.namd_r(base) 510.parest_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 511.povray_r(base) 526.blender_r(base)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_base = 141

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

### Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 141

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Sep-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-F.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-F.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V2  
(2.80 GHz, Intel Xeon Silver 4309Y)

SPECrate®2017\_fp\_base = 141

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-06 06:05:04-0400.

Report generated on 2021-09-29 12:27:19 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-28.