



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Feb-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

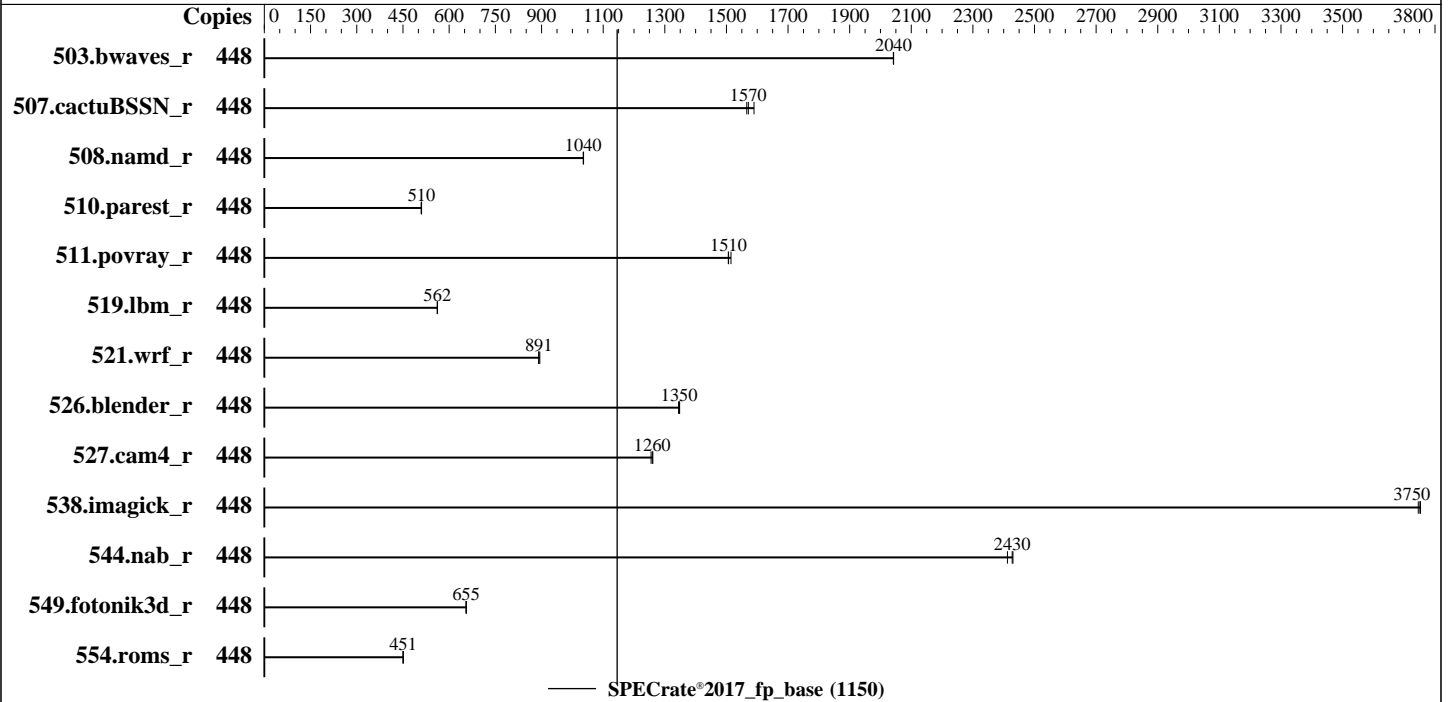

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 224 cores, 8 chips, 2 threads/core  
 Orderable: 2,4,6,8 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 2400 GB SAS, 10000 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 Parallel: No  
 Firmware: Version 8.18 released Sep-2021  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Feb-2022  
Hardware Availability: Apr-2019  
Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	448	2199	2040	<b><u>2200</u></b>	<b><u>2040</u></b>	2200	2040							
507.cactuBSSN_r	448	357	1590	362	1570	<b><u>361</u></b>	<b><u>1570</u></b>							
508.namd_r	448	411	1040	411	1040	<b><u>411</u></b>	<b><u>1040</u></b>							
510.parest_r	448	2296	510	<b><u>2297</u></b>	<b><u>510</u></b>	2302	509							
511.povray_r	448	691	1510	<b><u>694</u></b>	<b><u>1510</u></b>	695	1510							
519.lbm_r	448	841	561	<b><u>840</u></b>	<b><u>562</u></b>	840	562							
521.wrf_r	448	1122	894	<b><u>1126</u></b>	<b><u>891</u></b>	1127	891							
526.blender_r	448	507	1340	506	1350	<b><u>507</u></b>	<b><u>1350</u></b>							
527.cam4_r	448	621	1260	<b><u>622</u></b>	<b><u>1260</u></b>	624	1260							
538.imagick_r	448	297	3750	<b><u>297</u></b>	<b><u>3750</u></b>	297	3750							
544.nab_r	448	310	2430	313	2410	<b><u>311</u></b>	<b><u>2430</u></b>							
549.fotonik3d_r	448	<b><u>2665</u></b>	<b><u>655</u></b>	2661	656	2667	655							
554.roms_r	448	1579	451	1580	450	<b><u>1579</u></b>	<b><u>451</u></b>							

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/lib/intel64:/home/spec/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

### Platform Notes

BIOS configuration:  
Power Policy Set to Performance  
SNC Set to Enabled  
IMC (Integrated memory controller) Interleaving set to 1 way interleave  
Xtended Prediction Table (XPT) Prefetch set to Enabled  
Last Level Cache (LLC) Prefetch set to Disabled

Sysinfo program /home/spec/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Sat Feb 12 01:05:04 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
 8 "physical id"s (chips)
448 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu from util-linux 2.32.1:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 448
On-line CPU(s) list:   0-447
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               7
CPU MHz:                3299.998
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:               5400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
NUMA node8 CPU(s):     112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
NUMA node9 CPU(s):     116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
NUMA node10 CPU(s):    140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
NUMA node11 CPU(s):    144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
NUMA node12 CPU(s):    168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
NUMA node13 CPU(s):    172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```
NUMA node14 CPU(s): 196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
NUMA node15 CPU(s): 200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240  
241 245 246 247

node 0 size: 189428 MB

node 0 free: 184247 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243  
244 248 249 250 251

node 1 size: 191199 MB

node 1 free: 187854 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266  
267 268 269 273 274 275

node 2 size: 190427 MB

node 2 free: 187698 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270  
271 272 276 277 278 279

node 3 size: 190523 MB

node 3 free: 185419 MB

node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294  
295 296 297 301 302 303

node 4 size: 191379 MB

node 4 free: 188000 MB

node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298  
299 300 304 305 306 307

node 5 size: 191353 MB

node 5 free: 188022 MB

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317  
322 323 324 325 329 330 331

node 6 size: 191165 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

node 6 free: 184747 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 191349 MB
node 7 free: 186719 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 191363 MB
node 8 free: 187939 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 191275 MB
node 9 free: 188011 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 191251 MB
node 10 free: 187995 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 191159 MB
node 11 free: 188007 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 191291 MB
node 12 free: 184205 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 191495 MB
node 13 free: 188000 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 191421 MB
node 14 free: 187986 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 190737 MB
node 15 free: 187433 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 31 31 21 21 21 21 21 21 31 31 31 31 31 31
  1: 11 10 31 31 21 21 21 21 21 21 31 31 31 31 31 31
  2: 31 31 10 11 21 21 21 21 31 31 21 21 31 31 31 31
  3: 31 31 11 10 21 21 21 21 31 31 21 21 31 31 31 31
  4: 21 21 21 21 10 11 31 31 31 31 31 31 21 21 31 31
  5: 21 21 21 21 11 10 31 31 31 31 31 31 21 21 31 31
  6: 21 21 21 21 31 31 10 11 31 31 31 31 31 31 21 21
  7: 21 21 21 21 31 31 11 10 31 31 31 31 31 31 21 21

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

8:	21	21	31	31	31	31	31	31	10	11	21	21	31	31	21	21
9:	21	21	31	31	31	31	31	31	11	10	21	21	31	31	21	21
10:	31	31	21	21	31	31	31	31	21	21	10	11	21	21	31	31
11:	31	31	21	21	31	31	31	31	21	21	11	10	21	21	31	31
12:	31	31	31	31	21	21	31	31	31	31	21	21	10	11	21	21
13:	31	31	31	31	21	21	31	31	31	31	21	21	11	10	21	21
14:	31	31	31	31	31	31	21	21	21	21	31	31	21	21	10	11
15:	31	31	31	31	31	31	21	21	21	21	31	31	21	21	11	10

From /proc/meminfo

MemTotal: 3168351848 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"  
VERSION="8.3 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.3"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"  
ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

CVE-2018-3620 (L1 Terminal Fault):

Microarchitectural Data Sampling:

CVE-2017-5754 (Meltdown):

CVE-2018-3639 (Speculative Store Bypass):

KVM: Mitigation: Split huge pages

Not affected

Not affected

Not affected

Mitigation: Speculative Store

Bypass disabled via prctl and

seccomp

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaggs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: TSX disabled

run-level 3 Feb 11 20:22

```
SPEC is set to: /home/spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       ext4  2.0T   88G  1.8T   5% /home/spec
```

```
From /sys/devices/virtual/dmi/id
Vendor:          xFusion
Product:         9008 V5
Product Family: Purley
Serial:          123456
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 38x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933
  3x Hynix HMA84GR7JJR4N-WM 32 GB 2 rank 2933
 55x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

```
BIOS:
  BIOS Vendor:      INSYDE Corp.
  BIOS Version:     8.18
  BIOS Date:        09/06/2021
  BIOS Revision:    8.18
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

### Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Feb-2022  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nonstandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nonstandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nonstandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1150

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Feb-2022

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2020

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-11 12:05:03-0500.

Report generated on 2022-03-02 16:34:28 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-01.