



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

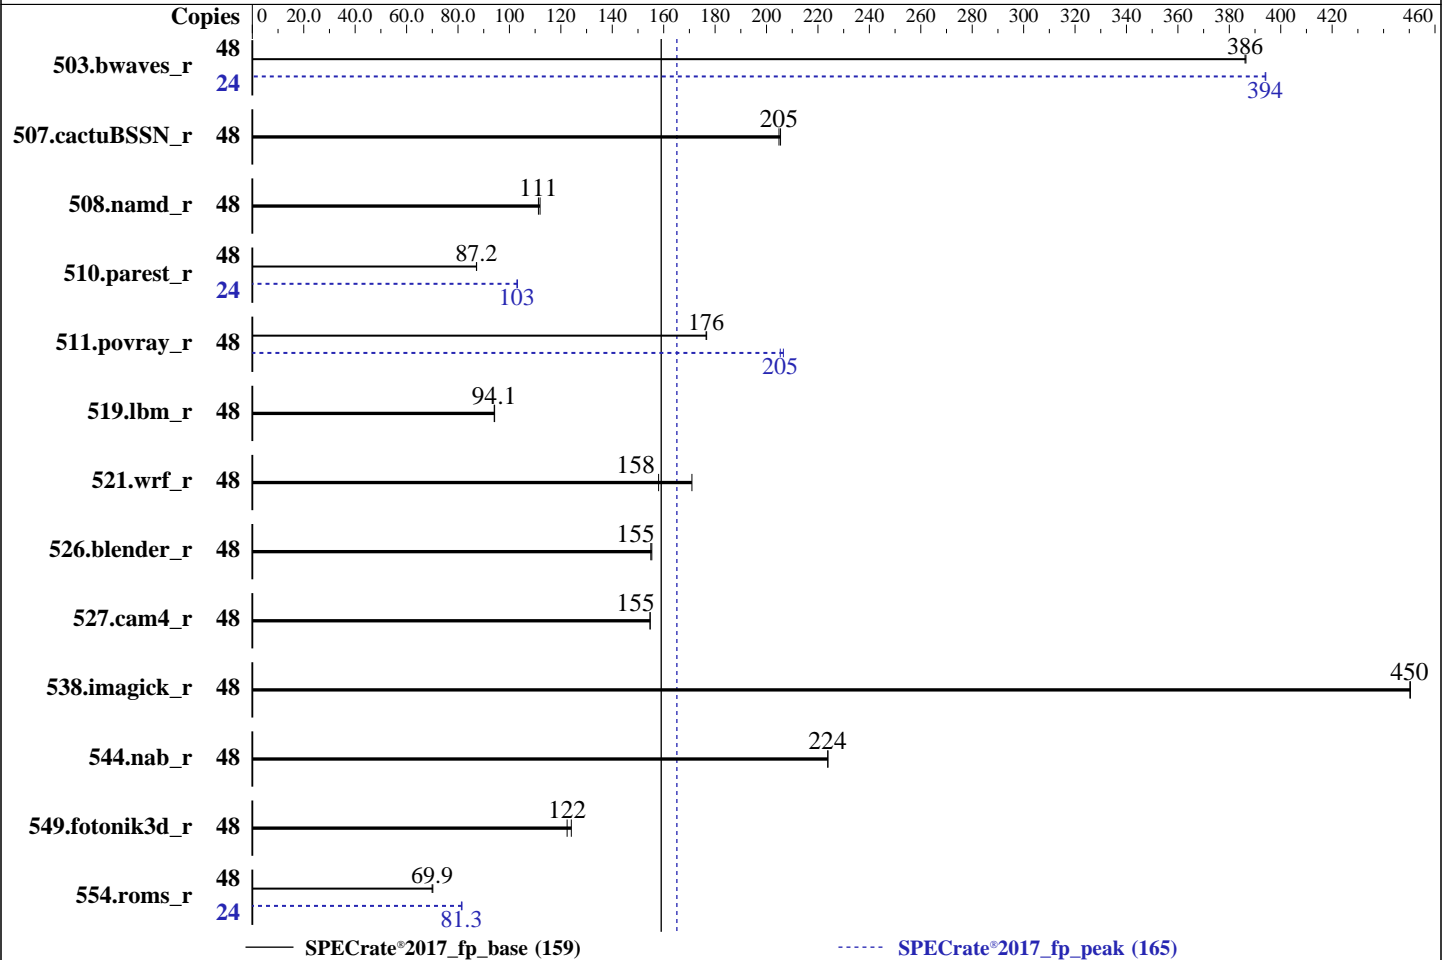

### Hardware

CPU Name: Intel Xeon Silver 4214R  
 Max MHz: 3500  
 Nominal: 2400  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 1.6 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 2.13.1 released Nov-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2021  
Hardware Availability: Feb-2020  
Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1245	386	<u>1247</u>	<u>386</u>			24	<u>611</u>	<u>394</u>	611	394		
507.cactuBSSN_r	48	296	205	<u>297</u>	<u>205</u>			48	296	205	<u>297</u>	<u>205</u>		
508.namd_r	48	407	112	<u>410</u>	<u>111</u>			48	407	112	<u>410</u>	<u>111</u>		
510.parest_r	48	<u>1441</u>	<u>87.2</u>	1439	87.2			24	<u>610</u>	<u>103</u>	609	103		
511.povray_r	48	634	177	<u>635</u>	<u>176</u>			48	<u>546</u>	<u>205</u>	543	207		
519.lbm_r	48	537	94.2	<u>538</u>	<u>94.1</u>			48	537	94.2	<u>538</u>	<u>94.1</u>		
521.wrf_r	48	<u>680</u>	<u>158</u>	629	171			48	<u>680</u>	<u>158</u>	629	171		
526.blender_r	48	<u>472</u>	<u>155</u>	470	155			48	<u>472</u>	<u>155</u>	470	155		
527.cam4_r	48	543	155	<u>543</u>	<u>155</u>			48	543	155	<u>543</u>	<u>155</u>		
538.imagick_r	48	265	450	<u>265</u>	<u>450</u>			48	265	450	<u>265</u>	<u>450</u>		
544.nab_r	48	<u>361</u>	<u>224</u>	361	224			48	<u>361</u>	<u>224</u>	361	224		
549.fotonik3d_r	48	<u>1528</u>	<u>122</u>	1508	124			48	<u>1528</u>	<u>122</u>	1508	124		
554.roms_r	48	1086	70.2	<u>1091</u>	<u>69.9</u>			24	468	81.5	<u>469</u>	<u>81.3</u>		

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1/lib/intel64:/home/cpu2017-1.1.8-ic2021.1/j  
e5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Dec-2020

## General Notes (Continued)

Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering  
 Virtualization Technology : Disabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 CPU Interconnect Bus Link  
 Power Management : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /home/cpu2017-1.1.8-ic2021.1/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost.localdomain Sun Nov 28 14:54:46 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz  
 2 "physical id"s (chips)  
 48 "processors"

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2021  
**Hardware Availability:** Feb-2020  
**Software Availability:** Dec-2020

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz
Stepping:              7
CPU MHz:               3181.077
CPU max MHz:           3500.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              16896K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni md_clear flush_lld arch_capabilities
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Dec-2020

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 93452 MB
node 0 free: 77437 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 94298 MB
node 1 free: 91903 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 94523 MB
node 2 free: 91774 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 94656 MB
node 3 free: 91771 MB
node distances:
node 0 1 2 3
0: 10 21 11 21
1: 21 10 21 11
2: 11 21 10 21
3: 21 11 21 10
```

From /proc/meminfo

```
MemTotal: 394816796 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2021  
**Hardware Availability:** Feb-2020  
**Software Availability:** Dec-2020

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: TSX disabled

```
run-level 3 Nov 28 08:58
```

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   390G   37G  354G  10% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge C6420
Product Family: PowerEdge
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 7x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
 2x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
 3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
 4x Not Specified Not Specified
```

```
BIOS:
BIOS Vendor:      Dell Inc.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2021  
**Hardware Availability:** Feb-2020  
**Software Availability:** Dec-2020

## Platform Notes (Continued)

BIOS Version: 2.13.1  
BIOS Date: 11/03/2021  
BIOS Revision: 2.13

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2021  
**Hardware Availability:** Feb-2020  
**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

## Base Portability Flags (Continued)

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icx
```

Benchmarks using both C and C++:

```
511.povray_r: icpc icc
```

```
526.blender_r: icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Dec-2020

## Peak Optimization Flags (Continued)

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4214R, 2.40 GHz)

SPECrate®2017\_fp\_base = 159

SPECrate®2017\_fp\_peak = 165

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Dec-2020

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-28 15:54:45-0500.

Report generated on 2022-03-16 13:58:39 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-16.