



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

CPU2017 License: 001176


Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

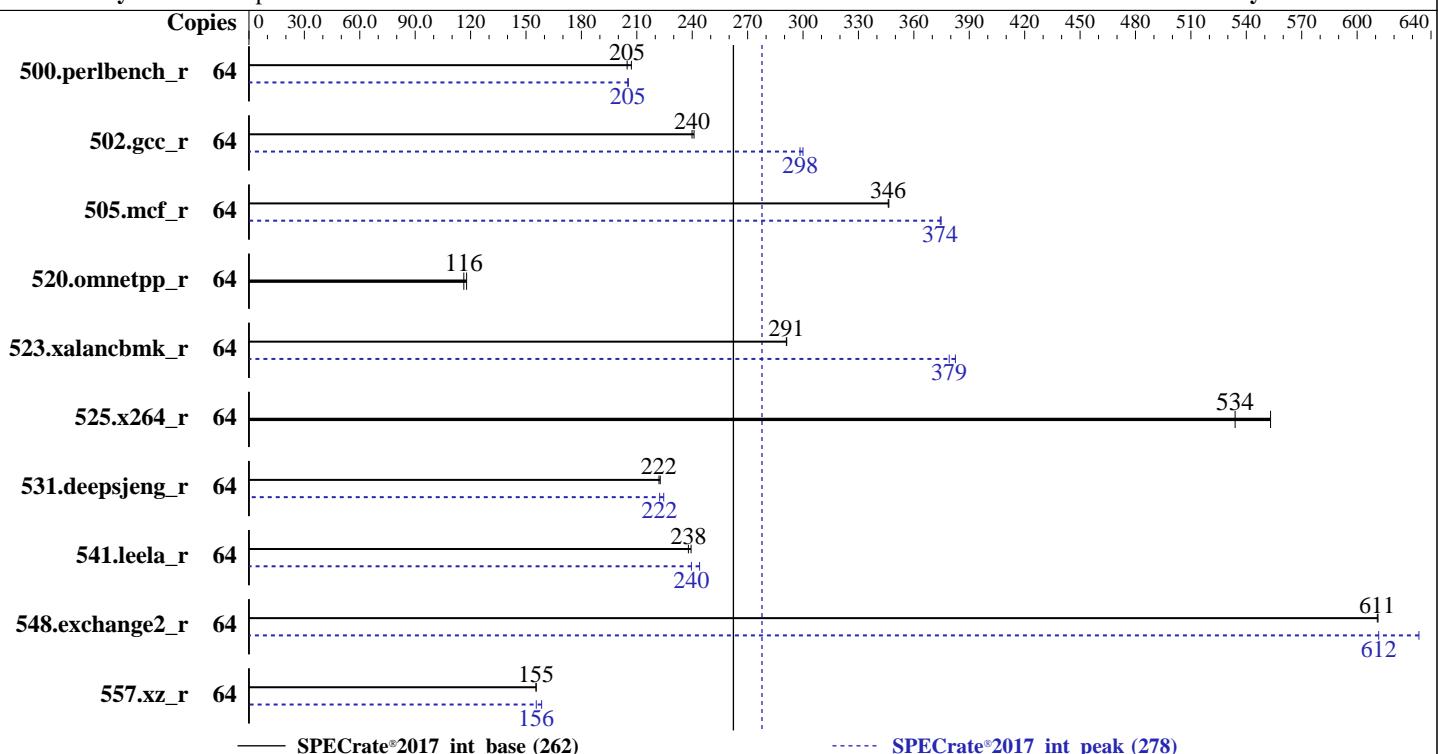

Hardware

CPU Name: AMD EPYC 7573X
Max MHz: 3600
Nominal: 2800
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores
Other: None
Memory: 128 GB (8 x 16 GB 1Rx4 PC4-2933Y-R)
Storage: 1 x 120 GB SATA III SSD
Other: None

Software

OS: Ubuntu 20.04.3 LTS
Compiler: Kernel 5.4.0-99-generic
Parallel: C/C++/Fortran: Version 3.2.0 of AOCC
Firmware: No
File System: Version 2.3a released Jan-2022
System State: ext4
Base Pointers: Run level 5 (multi-user)
Peak Pointers: 64-bit
Other: 32/64-bit
Power Management: jemalloc: jemalloc memory allocator library v5.1.0
BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	492	207	498	205			64	497	205	496	205				
502.gcc_r	64	376	241	378	240			64	304	298	302	300				
505.mcf_r	64	299	346	299	346			64	276	375	276	374				
520.omnetpp_r	64	722	116	713	118			64	722	116	713	118				
523.xalancbmk_r	64	232	291	232	291			64	178	379	177	382				
525.x264_r	64	210	534	203	553			64	210	534	203	553				
531.deepsjeng_r	64	329	223	330	222			64	330	222	327	225				
541.leela_r	64	443	239	445	238			64	442	240	434	244				
548.exchange2_r	64	274	611	274	611			64	274	612	265	633				
557.xz_r	64	444	156	445	155			64	444	156	436	158				

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.

To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib:/home/cpu2017/amd_rate_
    aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:

Determinism Control = Manual

Determinism Slider = Power

cTDP Control = Manual

cTDP = 280

Package Power Limit Control = Manual

Package Power Limit = 280

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECCrate®2017_int_base = 262

SPECCrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Platform Notes (Continued)

APBDIS = 1

NUMA Nodes Per Socket = NPS4

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on h12sst-d-7573x Wed Feb 16 02:46:09 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7573X 32-Core Processor
  1 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings   : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	64
On-line CPU(s) list:	0-63
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	1
NUMA node(s):	8
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7573X 32-Core Processor
Stepping:	2
Frequency boost:	enabled
CPU MHz:	1799.023
CPU max MHz:	2800.0000
CPU min MHz:	1500.0000
BogoMIPS:	5599.74
Virtualization:	AMD-V
L1d cache:	1 MiB
L1i cache:	1 MiB
L2 cache:	16 MiB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Platform Notes (Continued)

L3 cache:	768 MiB
NUMA node0 CPU(s):	0-3,32-35
NUMA node1 CPU(s):	4-7,36-39
NUMA node2 CPU(s):	8-11,40-43
NUMA node3 CPU(s):	12-15,44-47
NUMA node4 CPU(s):	16-19,48-51
NUMA node5 CPU(s):	20-23,52-55
NUMA node6 CPU(s):	24-27,56-59
NUMA node7 CPU(s):	28-31,60-63
Vulnerability Iltb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	512K	16M	8	Unified	2
L3	96M	768M	16	Unified	3

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 16002 MB
node 0 free: 15816 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 16123 MB
node 1 free: 15958 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 16125 MB
node 2 free: 15925 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 16096 MB
node 3 free: 14549 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 16125 MB
node 4 free: 15939 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 16124 MB
node 5 free: 15973 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 16125 MB
node 6 free: 15981 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 16112 MB
node 7 free: 15966 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 12 12 12 12 12 12
  1: 11 10 12 12 12 12 12 12
  2: 12 12 10 11 12 12 12 12
  3: 12 12 11 10 12 12 12 12
  4: 12 12 12 12 10 11 12 12
  5: 12 12 12 12 11 10 12 12
  6: 12 12 12 12 12 12 10 11
  7: 12 12 12 12 12 12 11 10
```

From /proc/meminfo

```
MemTotal:      131929868 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS

From /etc/*release* /etc/*version*

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Platform Notes (Continued)

```
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux h12sst-d-7573x 5.4.0-99-generic #112-Ubuntu SMP Thu Feb 3 13:50:55 UTC 2022
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Feb 16 02:38

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  110G   16G   89G  15%  /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Serial:          0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M393A2K40DB2-CVF 16 GB 1 rank 2933

BIOS:

BIOS Vendor: American Megatrends Inc.
BIOS Version: 2.3a
BIOS Date: 01/25/2022
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
    LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
    LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----

=====
C      | 502.gcc_r(peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
    LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Compiler Version Notes (Continued)

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

502.gcc_r: -m32 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-fllvm-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

```
531.deepsjeng_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-fllvm-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlbm -ljemalloc
```

541.leela_r: Same as 531.deepsjeng_r

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlbm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2014TP-HTR
(H12SST-PS , AMD EPYC 7573X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 262

SPECrate®2017_int_peak = 278

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

Peak Other Flags (Continued)

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-15 21:46:08-0500.

Report generated on 2022-03-22 10:59:08 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-22.